




Data sheet | Item number: 787-6716

Switched-mode power supply; 1-phase; 24 VDC output voltage; 4 A output current; PowerBoost

www.wago.com/787-6716

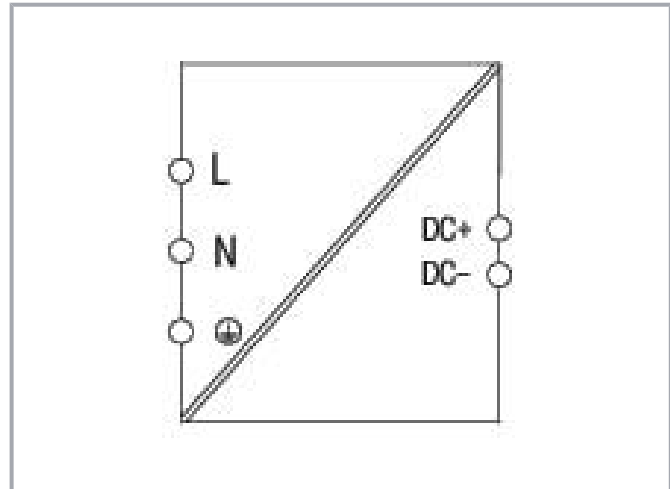

7/8" plug



7/8" socket

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Features:

- Switched-mode power supply with PowerBoost
- Low-profile, compact design
- Extremely robust, fully encapsulated housing (IP67)
- Active power factor correction
- High efficiency up to 92.3 %
- Surrounding air temperature up to 85 °C
- Suitable for both parallel and series operation

Data

Technical data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	AC/DC 100 ... 240 V
Input voltage range	AC/DC 90 ... 265 V
Nominal mains frequency range	47 ... 63.6 Hz; 0 Hz
Input current I_i	$\leq 0.5\text{ A}$ (250 VAC); $\leq 1.1\text{ A}$ (100 VAC)
Inrush current	$\leq 9\text{ A}$
Power factor	≥ 0.98
Power factor correction (PFC)	Active
Mains failure hold-up time	$\geq 45\text{ ms}$

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V
Output voltage range	$\pm 2\%$
Nominal output current $I_{o\text{ nom}}$	4 A
Nominal output power	96 W
Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak); $\leq 20\text{ mV}$ (rms)
Overload behavior	Constant current
PowerBoost	DC 6 A (5 s; without voltage drop)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Signaling and communication

Signaling	1 x LED DC OK (green) 1 x Overload LED (red)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses

Power loss P_I	$\leq 1 \text{ W}; \leq 7.9 \text{ W}$ (nominal load)
Efficiency (typ.)	92.3 % (230 VAC)

Circuit protection

Internal fuse	T 6.3 A
Backup fusing (recommended)	Circuit breaker: 4 ... 20 A; Characteristic: C T 20 A in building installations

Safety and protection

Protection class	I
Protection type	IP67
Overvoltage protection; secondary	$\leq 30 \text{ VDC}$ (per IEC 61131)
Short-circuit-protected	Yes
Parallel operation	3 devices (max.)
Series operation	2 devices (max.)
MTBF	> 960,000 h

Connection data

Connection type 1	Input
Connection technology	7/8"; 3-pole plug
Connection type 2	Output
Connection technology 2	7/8"; 5-pole socket

Physical data

Width	111 mm / 4.37 inches
Height	141 mm / 5.55 inches
Depth	54 mm / 2.123 inches

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Mechanical data

Mounting type	Screw mount
---------------	-------------

Material data

Weight	1100 g
--------	--------

Environmental requirements

Ambient temperature (operation)	-40 ... +85 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	4 ... 100 %
Derating	-3.84 W/K (> 60 °C)
Climatic category	4K6 (per EN 60721)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204 UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
Recupel Type	
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CZ
GTIN	4055143644877
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Subject to changes. Please also observe the further product documentation!

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
	EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
	UL Underwriters Laboratories Inc.	UL 508	E255817

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Cables and pluggable connectors

Power supply cable

	Item no.: 787-6716/9310-030 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 3-pole; Socket, straight; Length: 3 m	www.wago.com/787-6716/9310-030
	Item no.: 787-6716/9310-050 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 3-pole; Socket, straight; Length: 5 m	www.wago.com/787-6716/9310-050
	Item no.: 787-6716/9310-100 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 3-pole; Socket, straight; Length: 10 m	www.wago.com/787-6716/9310-100
	Item no.: 787-6716/9510-015 Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 5-pole; Plug, straight; Length: 1.5 m	www.wago.com/787-6716/9510-015

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 787-6716/9510-030

Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 5-pole; Plug, straight; Length: 3 m

www.wago.com/787-6716/9510-030


Item no.: 787-6716/9510-050

Supply cable, pre-assembled, 7/8 inch; 7/8 inch; 5-pole; Plug, straight; Length: 5 m

www.wago.com/787-6716/9510-050

Pluggable connectors



Item no.: 787-6716/9000-1000

Pluggable connector, 7/8 inch; 7/8 inch; 3-pole

www.wago.com/787-6716/9000-1000


Item no.: 787-6716/9100-000

Pluggable connector, 7/8 inch; 7/8 inch; 3-pole; Plug, straight

www.wago.com/787-6716/9100-000


Item no.: 787-6716/9300-000

Pluggable connector, 7/8 inch; 7/8 inch; 3-pole; Socket, straight

www.wago.com/787-6716/9300-000


Item no.: 787-6716/9500-000

Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Plug, straight

www.wago.com/787-6716/9500-000


Item no.: 787-6716/9400-000

Pluggable connector, 7/8 inch; 7/8 inch; 3-pole; Socket, angled

www.wago.com/787-6716/9400-000


Item no.: 787-6716/9600-000

Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Plug, angled

www.wago.com/787-6716/9600-000


Item no.: 787-6716/9700-000

Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Socket, straight

www.wago.com/787-6716/9700-000


Item no.: 787-6716/9800-000

Pluggable connector, 7/8 inch; 7/8 inch; 5-pole; Socket, angled

www.wago.com/787-6716/9800-000

Downloads

Documentation

Bid Text

787-6716

4 июл. 2019 г.

xml

Download

X81 - Datei

6.2 kB

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



787-6716	12 июн. 2019 г.	docx	Download
docx - Datei		19.3 kB	

Instruction Leaflet

Primär getaktete Stromversorgung IP67	18 мая 2021 г.	pdf	Download
DC 24 V, 4 A		457.9 kB	

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	18 авг. 2022 г.	2.2 MB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 787-6716	URL	Download
----------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-6716	URL	Download
Switched-mode power supply; 1-phase; 24 VDC output voltage; 4 A output current; PowerBoost		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.