


RoHS COMPLIANT

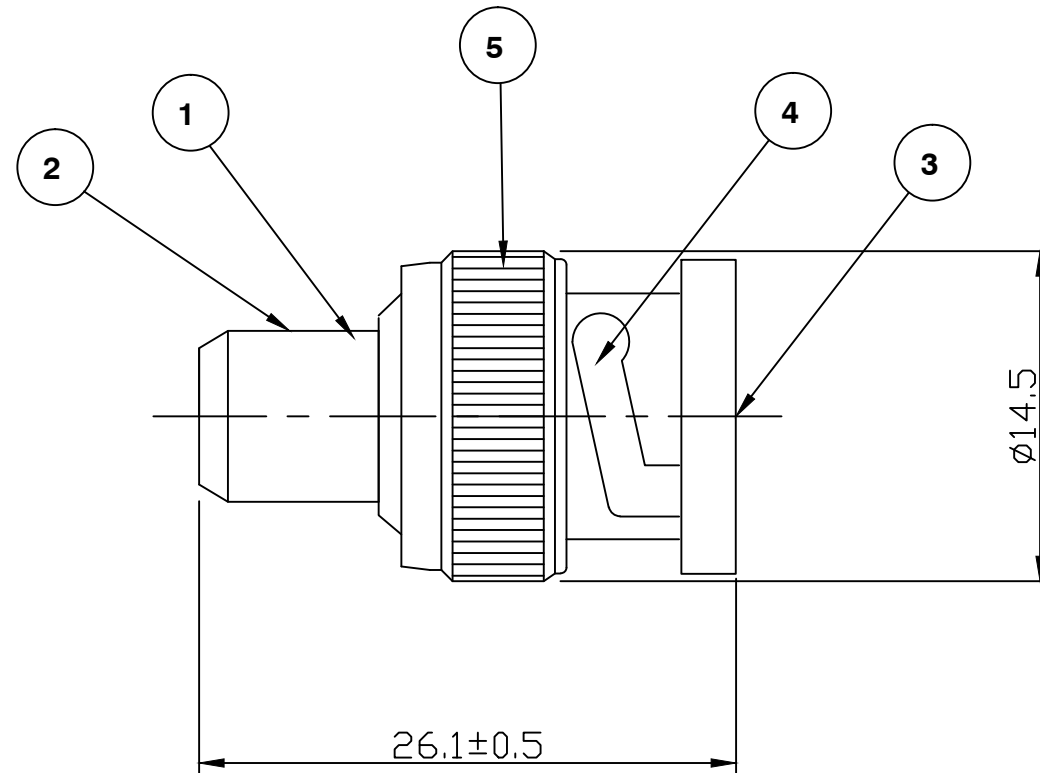

Electrical Characteristics

Nominal Impedance: 50 ohms
 Frequency Range: DC to 4 GHz
 Power: 0.5 Watts
 Operating Voltage (rms): 500 V maximum at sea level
 Dielectric Withstand Voltage (rms): 1500 V maximum at sea level
 Contact Resistance: 1.5 milliohms maximum

Mechanical Characteristics

Mating Cycles: 500 cycles minimum
 Interface Dimensions: Conform to MIL-C-39012

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Body Brass, nickel plated 1.78µm minimum
2	Resistor 50 Ohm 1/2 Watt
3	Contact Brass, gold plated 0.076µm - 0.127µm
4	Dielectric POM
5	Shell Zink, nickel plated 1.78µm minimum

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Dimension updates, ECN - D17506	MS	2	14 Oct 21
CAD Issue	PDC	1	14 Oct 02
First Issue	CN	A	09 Feb 95



CINCH CONNECTIVITY SOLUTIONS
 11 Bilton Road,
 Chelmsford, Essex,
 CM1 2UP, UK.
 Tel: +44 (0) 1245 359515
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
 ± 0.2mm unless
 otherwise stated

DRAWN BY:	P D Couzens
CHECKED BY:	S Nash
APPROVED BY:	A J Tatner
DATE:	14 Oct 02

TITLE:
**BNC 50 Ohm Terminator
 1/2 W**

PART NUMBER:
VBT50

PAGE: 1 of 1