

Style
M12 Plug, shielded
4 pin
B-coding

Ratings
Voltage: 250 V
Current: 4 A

Operating Temperature Range
-40~105 °C


Materials
① Insulator: Polyamide 66 (PA66), UL94 HB, black
② Pin: C3604 brass, gold plating
③ Shell: C3604 brass, nickel plated
④ Nut: C3604 brass, nickel plated
⑤ O-ring: Nitrile rubber, black

Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less



Mechanical Requirements
Life cycle: 500 mating cycles minimum

Environmental Requirements
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.
Waterproof: IP67




Assembly Info
Wire gauge: 22 AWG max



Front View
Not to Scale

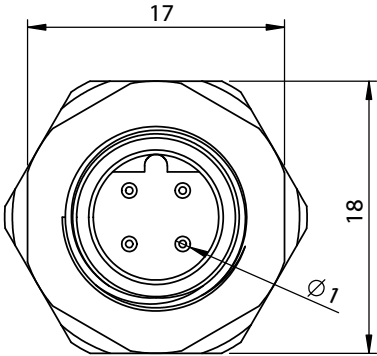

Panel cutout (PG9)
Panel thickness (4.5mm max.)

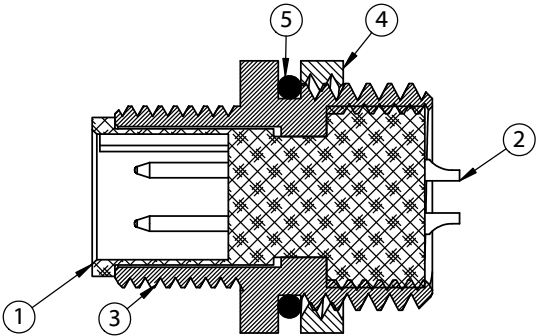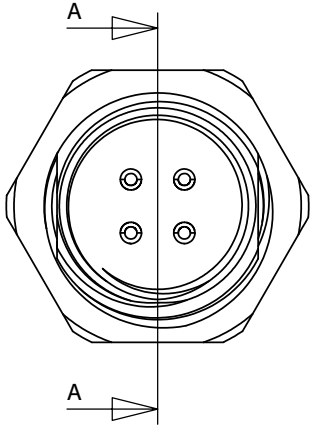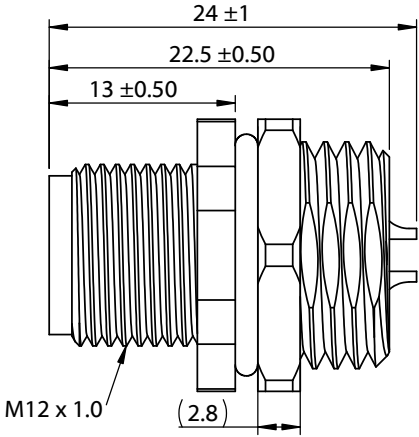

SECTION A-A

Revision:	Date:	Description:	Prepared: PB Digitally signed by PB Date: 2023.01.26 15:01:59 -08'00'	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	1/24/2023	Initial release	Verified: JD Digitally signed by JD Date: 2023.01.27 07:48:01 -08'00'	RoHS compliant		
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	Size: Part number: A 54-00339	
				Description: Connector, 4 pin M12 B-code plug, 12xL24mm, gold plated, panel mount, solder cup, IP67	Scale: 2:1	Sheet 1 of 1