




SCHRACK

TE Internal #: 9-1415546-9

Power Relays, Standard, Monostable, DC, 500 mW Coil Power Rating DC, 256 Ω Coil Resistance, 12 VDC Coil Voltage, 1 Form C (CO)

[View on TE.com >](#)

Relays & Contactors > Relays > Power Relays

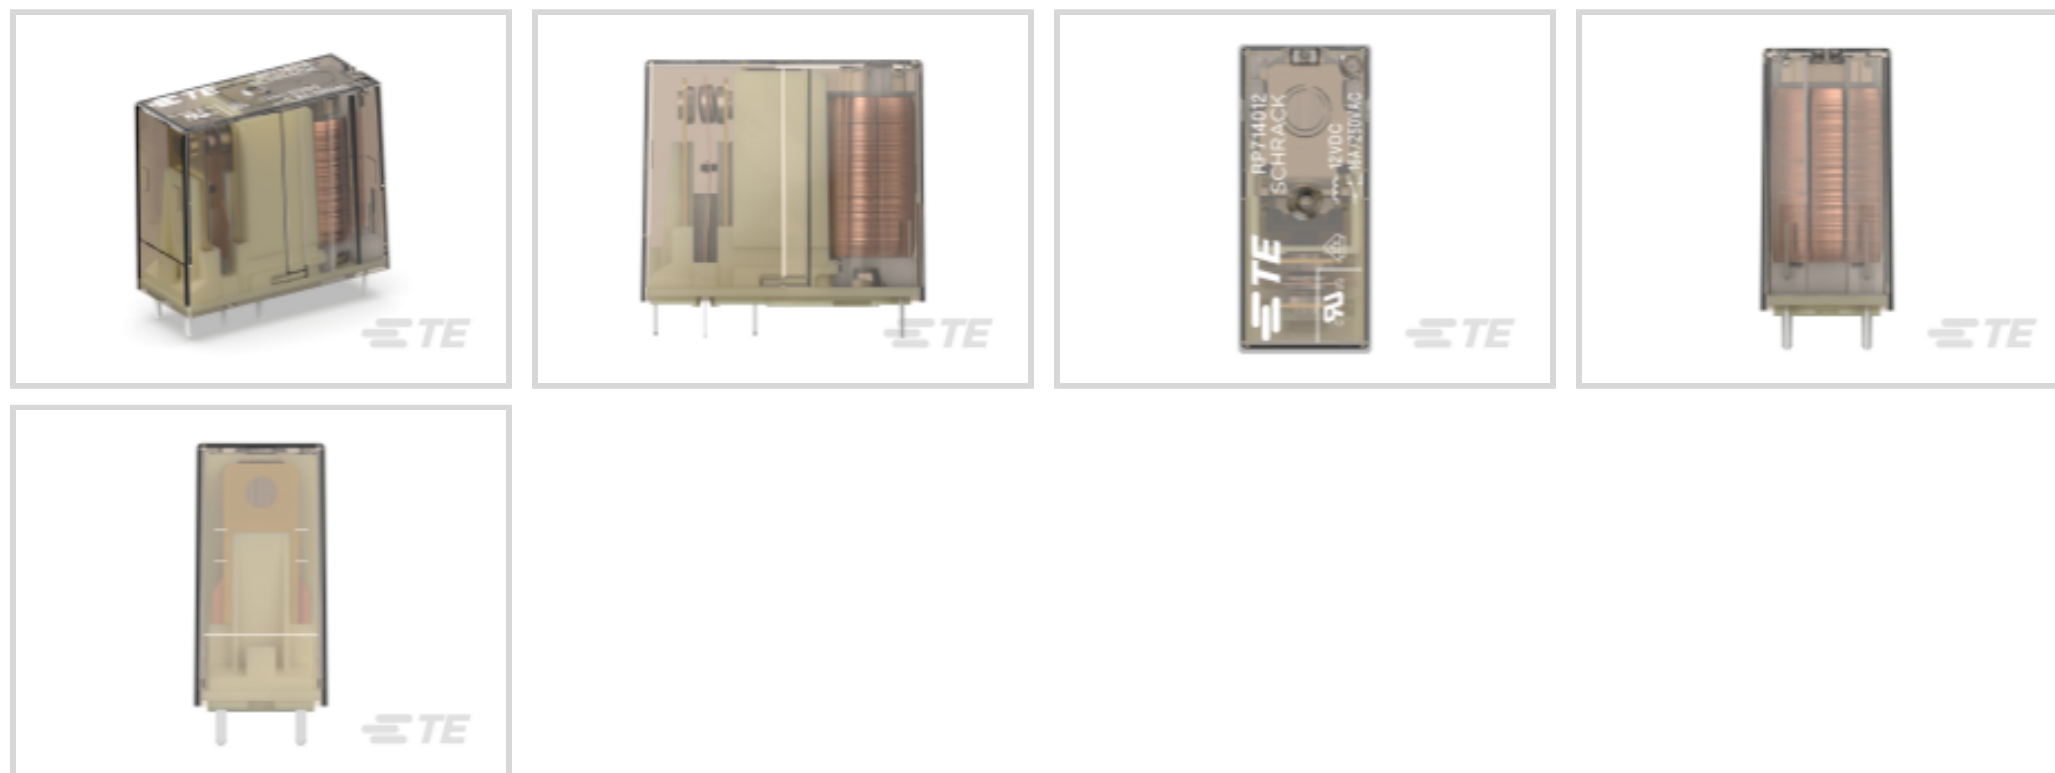

Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **500 mW**

Coil Resistance: **256 Ω**

Coil Voltage Rating: **12 VDC**

Features

Product Type Features

Relay Type	Standard
------------	----------

Configuration Features

Contact Arrangement	1 Form C (CO)
Contact Number of Poles	1

Electrical Characteristics

Coil Current	.047 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	16 A
Contact Limiting Short-Time Current	16 A
Coil Power Rating	.5 W
Contact Limiting Continuous Current	16 A
Logic Voltage	12 VDC
Contact Limiting Breaking Current	16 A



Coil Power Rating DC	500 mW
----------------------	--------

Coil Resistance	256 Ω
-----------------	--------------

Coil Voltage Rating	12 VDC
---------------------	--------

Contact Current Rating	16 A
------------------------	------

Contact Switching Load (Min)	100mA @ 24V
------------------------------	-------------

Contact Switching Voltage (Max)	300 VDC
---------------------------------	---------

Contact Voltage Rating	30 VDC
------------------------	--------

Body Features

Product Weight	18 g
----------------	------

Contact Features

Contact Plating Material	Silver Nickel
--------------------------	---------------

Contact Material	AgNi90/10
------------------	-----------

Termination Features

Relay Connection Type	PCB Termination
-----------------------	-----------------

Terminal Configuration	Solder Pins
------------------------	-------------

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Creepage Between Contact & Coil	8 mm
--	------

Insulation Clearance Between Contact & Coil	8 mm
---	------

Product Width	12.6 mm[.496 in]
---------------	------------------

Product Length	29 mm[1.14 in]
----------------	----------------

Product Height	25.5 mm[1 in]
----------------	---------------

Usage Conditions

Environmental Ambient Temperature (Max)	70 °C
---	-------

Operating Temperature Range	-40 - 70 °C
-----------------------------	-------------

Operation/Application

Actuating System	DC
------------------	----

Solder Process	Wave Solder
----------------	-------------

Output Switching	Random
------------------	--------

Coil Magnetic System	Monostable, DC
----------------------	----------------

Packaging Features



Packaging Method	Box & Tube
------------------	------------

Other

Length Class (Mechanical)	25 - 30 mm
Insulation Initial Dielectric Between Coil & Contact Class	4000 V
Environmental Ambient Temperature Class	-40 - 70 °C
Insulation Creepage Class	8 mm
Insulation Clearance Class	8 mm
Height Class (Mechanical)	25 - 30 mm
Coil Power Rating Class	500 - 600 mW
Width Class (Mechanical)	12 - 16 mm
Contact Current Class	15 - 20 A

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Methanone, (diphenylphosphinyl)(2,4,6-trimethylphenyl)- (2% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_9-1415546-9_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-1415546-9_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-1415546-9_A.3d_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

PCB Accessories Industrial Power Relays

English

Power PCB Relay RPII/1

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English