

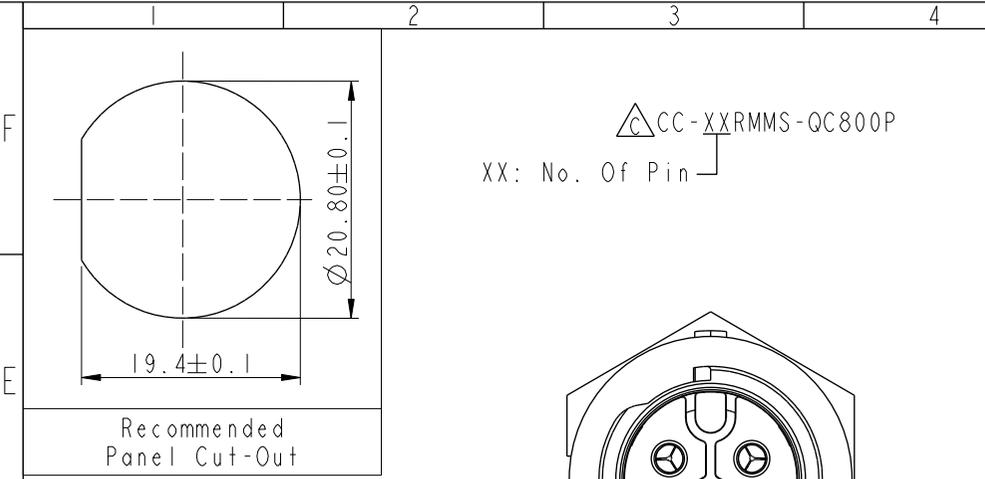
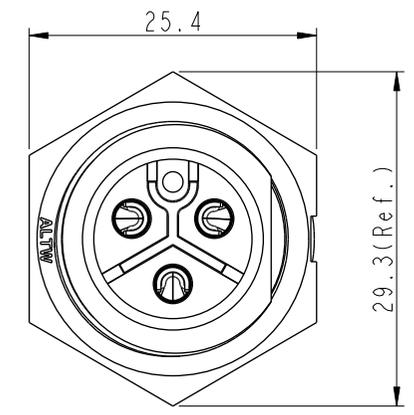


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190470	2019/03/20	Vicky	Change Note
C	C220628	2022/05/10	Vicky	△C X5
D	C230087	2023/01/31	Vicky	△D X2

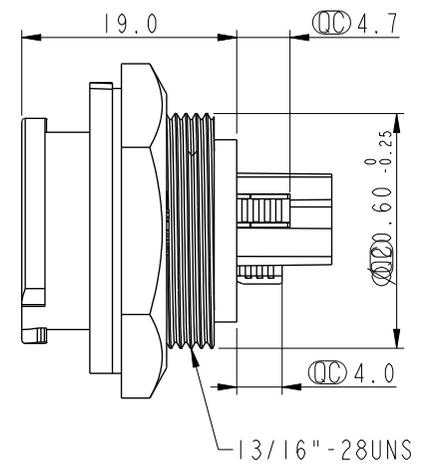


△C CC-XXRMMS-QC800P  
 XX: No. Of Pin

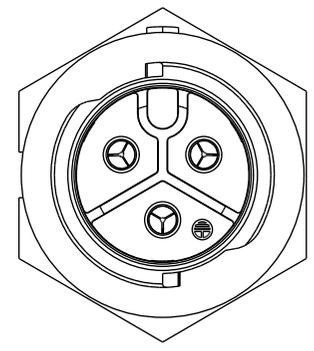


Item No.	A	B
CC-02RMMS-QC800P	4.7	
CC-03RMMS-QC800P	4.7	4.0

⊕ White Printing

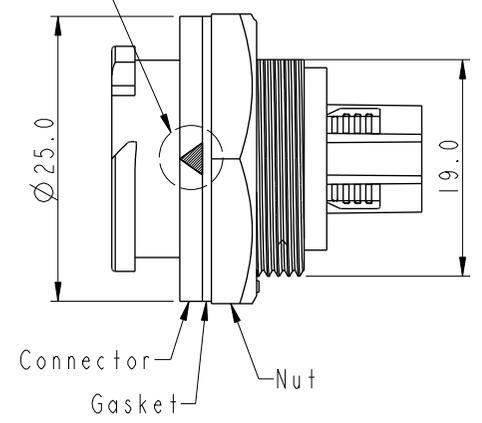

△B △C  
 Note:  
 \* RoHS Compliant  
 \* ⊕ Important dimension  
 △D \* Waterproof rate: IP68, unmated 1m/24h  
 \* Connector  
 Housing: Thermoplastic, Black  
 Pin: Copper Alloy, Gold plated  
 \* Nut: Thermoplastic, Black  
 \* Gasket: Rubber, Gray  
 \* For panel thickness max: 4.2mm  
 \* Gasket and nut are packed separately in pe bag

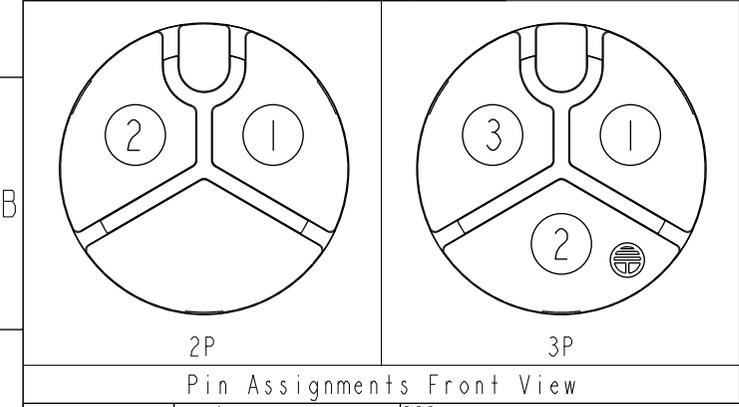

UNIT: mm			TITLE XLOK, C-20A, REAR FASTENED M, M, SOLDER, PUSH LOCK	△C △D
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 3:2	SIZE A4	SHEET 1 OF 1	REV. D
	WC-REV. A.3	⊕ Inspection item		

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO. CC-XXRMMS-QC800P	DRAWN BY Vicky	DATE 2019-03-20
DWG NO. CUSTOMER ALTW	CHECKED BY Rita	DATE 2019-03-20
	APPROVED BY Max	DATE 2019-03-20