


UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, **Assembly instruction:**

In order to securely fix the neutral busbar in place, support brackets must be placed at the beginning and end of each terminal strip as well as every 20 cm on longer terminal strips.

The corresponding support brackets can be found at [phoenixcontact.com/products](https://www.phoenixcontact.com/products), nom. voltage: 400 V, nominal current: 38 A, Screw connection, Rated cross section: 6 mm², cross section: 0.2 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- The asymmetrical arrangement of the terminal blocks on the DIN rail enables the neutral busbar to be routed past the terminal blocks
- The installation terminal block features a particularly low-profile design and is suitable for wiring in flat installation distributors

Commercial data

Item number	3076039
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1153
Catalog page	Page 180 (C-1-2019)
GTIN	4046356817615
Weight per piece (including packing)	36.42 g
Weight per piece (excluding packing)	36.42 g
Customs tariff number	85369010
Country of origin	PL

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

Technical data

Notes

General	Assembly instruction: In order to securely fix the neutral busbar in place, support brackets must be placed at the beginning and end of each terminal strip as well as every 20 cm on longer terminal strips. The corresponding support brackets can be found at phoenixcontact.com/products
---------	--

Product properties

Product type	Installation terminal block
Number of connections	4
Number of rows	3
Potentials	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W
Current carrying capacity of the neutral busbar	140 A

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	6 mm ²

Level 1

Screw thread	M3
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Internal cylindrical gage	A5
Conductor cross section rigid	0.2 mm ² ... 10 mm ²
Cross section AWG	24 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	24 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²
Nominal current	38 A (with 6 mm ² conductor cross section)
Maximum load current	47 A (with 10 mm ² conductor cross section)
Nominal voltage	400 V (phase conductor/phase conductor) 250 V (phase conductor/PE)

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

	250 V (phase conductor/N)
Nominal cross section	6 mm ²

Dimensions

Width	8.2 mm
End cover width	2.2 mm
Height	95 mm
Depth on NS 35/7,5	51.5 mm
Depth on NS 35/15	59 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15

UTI 6-PE/L/NT - Installation ground terminal block




3076039

<https://www.phoenixcontact.com/us/products/3076039>

Drawings

Circuit diagram

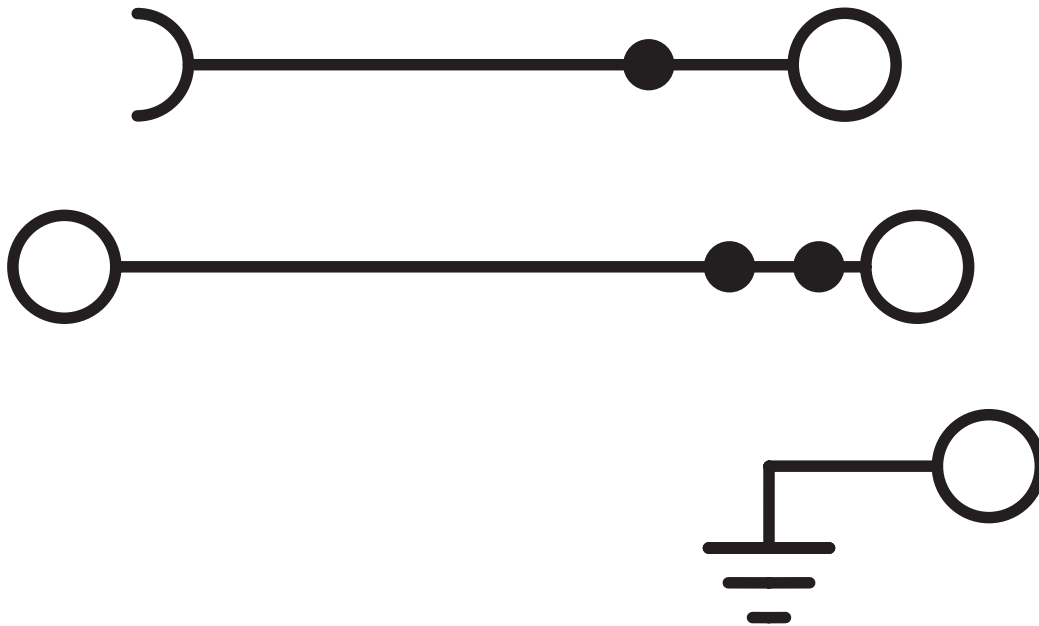

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3076039>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	20 A	24 - 8	-
Use group D	300 V	10 A	24 - 8	-

 EAC Approval ID: RU C-DE.A*30.B.01742				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	20 A	24 - 8	-
PE connection	-	-	24 - 8	-
Use group D	300 V	10 A	24 - 8	-
PE connection	-	-	24 - 8	-

 EAC Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

Classifications

ECLASS

ECLASS-11.0	27141125
ECLASS-12.0	27141125
ECLASS-13.0	27250110

ETIM

ETIM 9.0	EC001329
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%
EF3.0 Climate Change	
CO2e kg	0.201 kg CO2e

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

Accessories

i Note: Applying some accessories below might limit this product.

FBSL 2-8 - Plug-in bridge

3030324

<https://www.phoenixcontact.com/us/products/3030324>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

i Max. current carrying capacity: 34 A

FBSL 3-8 - Plug-in bridge

3030325

<https://www.phoenixcontact.com/us/products/3030325>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

i Max. current carrying capacity: 34 A

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

FBSL 4-8 - Plug-in bridge

3030326

<https://www.phoenixcontact.com/us/products/3030326>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 34 A

FBSL 5-8 - Plug-in bridge

3030327

<https://www.phoenixcontact.com/us/products/3030327>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 34 A

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

FBSL 10-8 - Plug-in bridge

3030328

<https://www.phoenixcontact.com/us/products/3030328>

Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red




 Max. current carrying capacity: 34 A

D-UTI 6/3 - End cover

1025464

<https://www.phoenixcontact.com/us/products/1025464>

End cover, depth: 50.7 mm, width: 2.2 mm, height: 95 mm, color: gray



UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

LPS-8/E - Service connector

3270560

<https://www.phoenixcontact.com/us/products/3270560>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPS-8 - Service connector

3270561

<https://www.phoenixcontact.com/us/products/3270561>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

LPO 6/E - Pick-off plug

3270525

<https://www.phoenixcontact.com/us/products/3270525>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

LPO 6 - Pick-off plug

3270526

<https://www.phoenixcontact.com/us/products/3270526>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>



DIN rail end piece, for DIN rail NS 35/15

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat

0808781

<https://www.phoenixcontact.com/us/products/0808781>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

ZBF 8 CUS - Zack Marker strip, flat

0825030

<https://www.phoenixcontact.com/us/products/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

ZBF 8,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808804

<https://www.phoenixcontact.com/us/products/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

UC-TMF 8 - Marker for terminal blocks

0818137

<https://www.phoenixcontact.com/us/products/0818137>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

UC-TMF 8 CUS - Marker for terminal blocks

0824654

<https://www.phoenixcontact.com/us/products/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

UCT-TMF 8 - Marker for terminal blocks

0828748

<https://www.phoenixcontact.com/us/products/0828748>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

UCT-TMF 8 CUS - Marker for terminal blocks

0829672

<https://www.phoenixcontact.com/us/products/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

UTI 6-PE/L/NT - Installation ground terminal block




3076039

<https://www.phoenixcontact.com/us/products/3076039>

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/us/products/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/us/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/us/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/us/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/us/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/us/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UTI 6-PE/L/NT - Installation ground terminal block




3076039

<https://www.phoenixcontact.com/us/products/3076039>

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/us/products/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/us/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

UTI 6-PE/L/NT - Installation ground terminal block

3076039


<https://www.phoenixcontact.com/us/products/3076039>



ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/us/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/us/products/3032871>



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAI-4-FIX BU - Test adapter

3032729

<https://www.phoenixcontact.com/us/products/3032729>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: blue

PAI-4-FIX OG - Test adapter

3034455

<https://www.phoenixcontact.com/us/products/3034455>



4 mm test adapter, for terminal blocks with 8.2 mm pitch

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAI-4-FIX YE - Test adapter

3032745

<https://www.phoenixcontact.com/us/products/3032745>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: yellow

PAI-4-FIX RD - Test adapter

3032732

<https://www.phoenixcontact.com/us/products/3032732>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: red

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAI-4-FIX GN - Test adapter

3032758

<https://www.phoenixcontact.com/us/products/3032758>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: green

PAI-4-FIX BK - Test adapter

3032774

<https://www.phoenixcontact.com/us/products/3032774>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: black

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAI-4-FIX GY - Test adapter

3032790

<https://www.phoenixcontact.com/us/products/3032790>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: gray

PAI-4-FIX VT - Test adapter

3032761

<https://www.phoenixcontact.com/us/products/3032761>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: violet

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAI-4-FIX BN - Test adapter

3032787

<https://www.phoenixcontact.com/us/products/3032787>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: brown

PAI-4-FIX WH - Test adapter

3032797

<https://www.phoenixcontact.com/us/products/3032797>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: white

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAIS-4-FIX GY - Test adapter

3032791

<https://www.phoenixcontact.com/us/products/3032791>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: gray

PAIS-4-FIX BK - Test adapter

3032792

<https://www.phoenixcontact.com/us/products/3032792>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: black

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAIS-4-FIX RD - Test adapter

3032793

<https://www.phoenixcontact.com/us/products/3032793>



Test adapter, Do not plug in while the power is connected, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: red

PAIS-4-FIX BU - Test adapter

3032798

<https://www.phoenixcontact.com/us/products/3032798>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: blue

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAIS-4-FIX YE - Test adapter

3032799

<https://www.phoenixcontact.com/us/products/3032799>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: yellow

PAIS-4-FIX GN - Test adapter

3032801

<https://www.phoenixcontact.com/us/products/3032801>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: green

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

PAIS-4-FIX VT - Test adapter

3032802

<https://www.phoenixcontact.com/us/products/3032802>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: violet

PS-8 - Test plug

3031005

<https://www.phoenixcontact.com/us/products/3031005>



Test plug, Modular test plug, number of positions: 1, color: red

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

DP PS-8 - Spacer plate

3036741

<https://www.phoenixcontact.com/us/products/3036741>



Spacer plate, depth: 29 mm, width: 8.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-8/2,3MM RD - Test plug

3048564

<https://www.phoenixcontact.com/us/products/3048564>



Test plug, number of positions: 1, color: red

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 1600MM - Neutral conductor rail

5406430

<https://www.phoenixcontact.com/us/products/5406430>



NLS-CU 3/10 1160MM - Neutral conductor rail

5406429

<https://www.phoenixcontact.com/us/products/5406429>



UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 148MM 2X5,5 - Neutral conductor rail

5406390

<https://www.phoenixcontact.com/us/products/5406390>



NLS-CU 3/10 SN 55MM 2X5,5 - Neutral busbar

5406304

<https://www.phoenixcontact.com/us/products/5406304>



Neutral busbar, material: Copper, tin-plated

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 SN 300MM 2X5,2 - Neutral busbar

5406221

<https://www.phoenixcontact.com/us/products/5406221>



Neutral busbar

NLS-CU 3/10 SN 175MM - Neutral busbar

5406194

<https://www.phoenixcontact.com/us/products/5406194>



Neutral busbar

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 SN 630MM - Neutral busbar

5406185

<https://www.phoenixcontact.com/us/products/5406185>



Neutral busbar, material: Copper, tin-plated

NLS-CU 3/10 SN 550MM - Neutral busbar

5406184

<https://www.phoenixcontact.com/us/products/5406184>



Neutral busbar, material: Copper, tin-plated

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 SN 1550MM - Neutral busbar

5406170

<https://www.phoenixcontact.com/us/products/5406170>



Neutral busbar, material: Copper, tin-plated

NLS-CU 3/10 SN 93MM - Neutral busbar

5406159

<https://www.phoenixcontact.com/us/products/5406159>



Neutral busbar, material: Copper, tin-plated

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 16.31.19.040-AA - Neutral busbar

5405865

<https://www.phoenixcontact.com/us/products/5405865>



Neutral busbar, material: Copper, tin-plated

NLS-CU 3/10 95MM ZG.160452 - Neutral busbar

5405857

<https://www.phoenixcontact.com/us/products/5405857>



Neutral busbar, material: Copper, tin-plated

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 58MM ZG.155646 - Neutral busbar

5405855

<https://www.phoenixcontact.com/us/products/5405855>



Neutral busbar, material: Copper, tin-plated

NLS-CU 3/10 SN 90MM LANG - Neutral busbar

5405836

<https://www.phoenixcontact.com/us/products/5405836>



Neutral busbar, material: Copper, tin-plated

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 245MM LG - Neutral busbar

5405831

<https://www.phoenixcontact.com/us/products/5405831>



Neutral busbar, material: Copper, tin-plated

NLS 3/10 AV 134/134 - Neutral busbar

3062870

<https://www.phoenixcontact.com/us/products/3062870>



Angled rail for holding the C-NBB busbar connector

UTI 6-PE/L/NT - Installation ground terminal block



3076039

<https://www.phoenixcontact.com/us/products/3076039>

NLS-CU 3/10 SN 150MM 2X3,5 - Neutral busbar

1044718

<https://www.phoenixcontact.com/us/products/1044718>



PEN conductor busbar, 3 mm x 10 mm

NLS-CU 3/10 220MM 4X4,5 1XM4 - Neutral busbar

1013677

<https://www.phoenixcontact.com/us/products/1013677>



PEN conductor busbar, 3 mm x 10 mm

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



NLS-CU 3/10 SN 1000MM - Neutral busbar

0402174

<https://www.phoenixcontact.com/us/products/0402174>



Neutral busbar, DIN VDE 0611-4: 1991-02, color: silver

NLS-CU 3/10 SN 2000MM - Neutral busbar

0402006

<https://www.phoenixcontact.com/us/products/0402006>



Neutral busbar, DIN VDE 0611-4: 1991-02, material: Copper, tin-plated, color: silver

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>



AP-NLS N - Cover profile

1013634

<https://www.phoenixcontact.com/us/products/1013634>



Cover profile, height: 300 mm, color: transparent

SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

UTI 6-PE/L/NT - Installation ground terminal block

3076039

<https://www.phoenixcontact.com/us/products/3076039>




AB-UTI 6/3 - Support bracket

1037092

<https://www.phoenixcontact.com/us/products/1037092>

Support bracket, Bracket for busbars, set every 20 cm, pitch: 200 mm, depth: 51.2 mm, width: 2.2 mm, height: 97.4 mm, number of positions: 1, color: blue



PROJECT COMPLETE - Software

1050453

<https://www.phoenixcontact.com/us/products/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com