

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe coupling relay with force-guided contacts, 5 N/O contacts, 2 N/C contacts, 1-channel, plug-in screw terminal block, width: 22.5 mm

Your advantages

- Suitable up to category 1, PL c (EN ISO 13849-1), SIL 1 (EN IEC 62061), SIL 1 (IEC 61508)
- Safe readback due to force-guided signal contact in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- 1 or 2-channel control
- 5 enabling current paths, 2 confirmation current paths
- 120 V version

Commercial data

Item number	2981402
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA162
Catalog page	Page 245 (C-6-2019)
GTIN	4017918944179
Weight per piece (including packing)	177.03 g
Weight per piece (excluding packing)	150.18 g
Customs tariff number	85364900
Country of origin	DE

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Technical data

Notes

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Coupling relay
Product family	PSRclassic
Application	Safe switch off
	High demand
	Low demand
Mechanical service life	10x 10 ⁶ cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

Data management status

Article revision	09
------------------	----

Times

Typ. starting time with U _s	typ. 20 ms (with U _s when controlled via A1)
Typical release time	20 ms (with U _s when controlled via A1)
Restart time	< 1 s (Boot time)
Recovery time	< 500 ms

Electrical properties

Maximum power dissipation for nominal condition	8.8 W (at U _B = 132 V DC, U _S = 120 V, I _S = 11 mA, n = 1, I _L ² = 72 A ² , R _{contact} = 0.1 Ω _{max})
Nominal operating mode	100% operating factor

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V
	250 V
Rated surge voltage/insulation	4 kV basic insulation (4 kV safe isolation, reinforced insulation between A1/A2, 13/14, 23/24, 33/34 to 43/44, 53/54, 61/62, 71/72)

Supply

Rated control circuit supply voltage U _S	120 V AC/DC -20 % ... +10 %
Rated control supply current I _S	typ. 11 mA
Power consumption at U _S	typ. 1.32 W
Inrush current	typ. 600 mA (Δt = 200 μs at U _S)
Protective circuit	Surge protection; Varistor

Output data

Relay: Enabling current paths (13/14, 23/24, 33/34, 43/44, 53/54)

Number of outputs	5
-------------------	---

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Contact switching type	5 enabling current paths
Contact material	AgSnO ₂
Switching capacity	min. 50 mW
Inrush current	max. 6 A
Switching capacity in accordance with IEC 60947-5-1	3 A (AC15, 250 V)
	3 A (DC13, 24 V)
Switching capacity (360/h cycles)	4 A (AC15, 250 V)
	4 A (DC13, 24 V)
Limiting continuous current	6 A (N/O contact)
	3 A (N/C contact)
Sq. Total current	72 A ² (observe derating)
Switching frequency	max. 0.5 Hz
Mechanical service life	10 ⁷ cycles
Interrupting rating (ohmic load) max.	144 W (N/O contact, 24 V DC, $\tau = 0$ ms)
	288 W (N/O contact, 48 V DC, $\tau = 0$ ms)
	240 W (N/O contact, 60 V DC, $\tau = 0$ ms)
	110 W (N/O contact, 110 V DC, $\tau = 0$ ms)
	88 W (N/O contact, 220 V DC, $\tau = 0$ ms)
	1380 W (N/O contact, 250 V AC, $\tau = 0$ ms)
Maximum interrupting rating (inductive load)	42 W (N/O contact, 24 V DC, $\tau = 40$ ms)
	42 W (N/O contact, 48 V DC, $\tau = 40$ ms)
	42 W (N/O contact, 60 V DC, $\tau = 40$ ms)
	42 W (N/O contact, 110 V DC, $\tau = 40$ ms)
	42 W (N/O contact, 220 V DC, $\tau = 40$ ms)
Output fuse	6 A gL/gG NEOZED (N/C contact)
	4 A gL/gG NEOZED (N/O contact, low demand)
	10 A gL/gG NEOZED (N/O contact)

Relay: Confirmation current paths (61/62, 71/72)

Number of outputs	2
Contact switching type	2 confirmation current paths
Contact material	AgSnO ₂
Switching capacity	min. 50 mW
Inrush current	min. 10 mA
	max. 6 A
Switching capacity in accordance with IEC 60947-5-1	3 A (DC13, 24 V)
	3 A (AC15, 250 V)
Switching capacity (360/h cycles)	4 A (DC13, 24 V)
	4 A (AC15, 250 V)
Limiting continuous current	6 A (N/O contact)
	3 A (N/C contact)
Sq. Total current	72 A ² (see to derating)
Mechanical service life	10 ⁷ cycles
	6 A gL/gG NEOZED (N/O contact)

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Output fuse	4 A gL/gG NEOZED (N/C contact, low-demand)
	10 A gL/gG NEOZED (N/O contact)

Connection data

Connection technology

pluggable	yes
-----------	-----

Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12
Stripping length	7 mm
Screw thread	M3
Tightening torque	0.6 Nm

Signaling

Operating voltage display	1 x green LED
---------------------------	---------------

Dimensions

Width	22.5 mm
Height	114.5 mm
Depth	99 mm

Material specifications

Color	yellow
Housing material	Polyamide

Characteristics

Safety data

Stop category	0
---------------	---

Safety data: EN ISO 13849

Category	1
Performance level (PL)	c

Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	1
------------------------------	---

Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	1
------------------------------	---

Safety data

Safety Integrity Level (SIL)	1
------------------------------	---

Environmental and real-life conditions

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g (In the event of stress caused by shock, contact reactions are possible for up to 2 ms.)
Vibration (operation)	10 Hz ... 150 Hz, 2g (In the event of stress caused by vibration, contact reactions are possible for up to 1 ms.)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	DIN EN 50178
-----------------------	--------------

Mounting

Mounting type	DIN rail mounting
Mounting position	vertical or horizontal

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay




2981402

<https://www.phoenixcontact.com/us/products/2981402>


Drawings

Block diagram

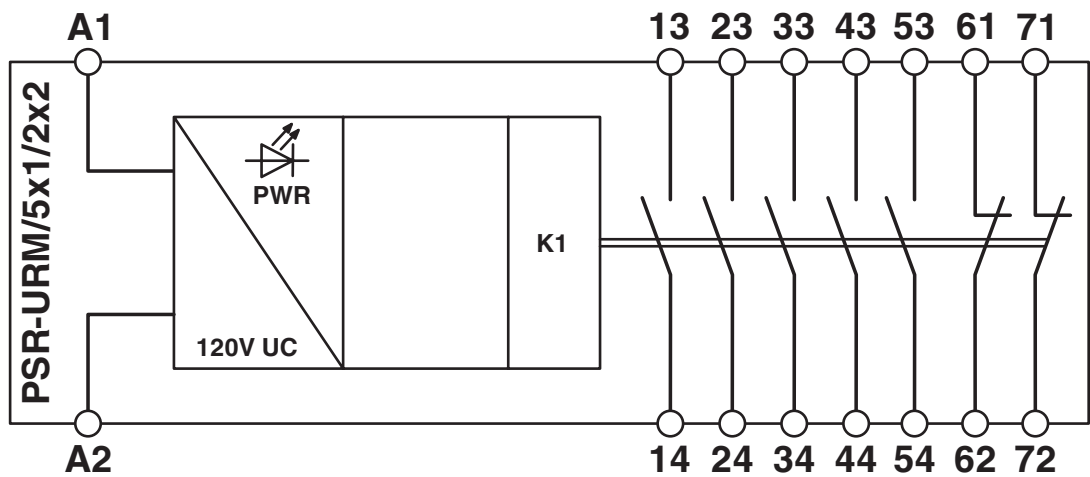

Block diagram

Application drawing

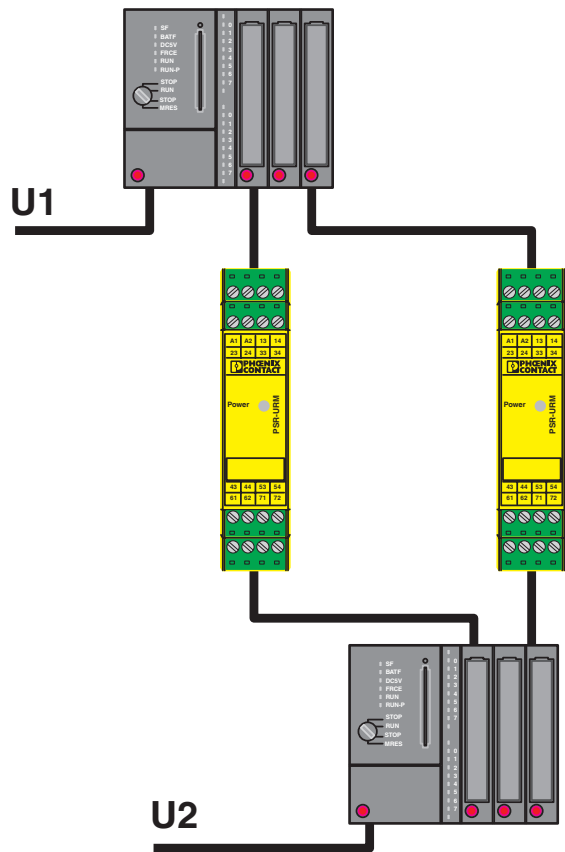

Reliable signal exchange between two systems with confirmation function.

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2981402>



EAC
Approval ID: RU C-DE.A*30.B.01082



UL Listed
Approval ID: FILE E 140324



cUL Listed
Approval ID: FILE E 140324



Functional Safety
Approval ID: 44-780-15124312



Functional Safety
Approval ID: 44-205-15124312

cULus Listed

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Classifications

ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

ETIM

ETIM 8.0	EC001449
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	581de417-8684-461b-ba17-b89ee96108ac

PSR-SCP-120UC/URM/5X1/2X2 - Coupling relay



2981402

<https://www.phoenixcontact.com/us/products/2981402>

Accessories

CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com