POB.186.GN



Summary

Request a quote

Catalog

Gender	Standard
Locking system	Push-pull
Size	1P
Series	REDEL P - Push-Pull


Technical details

Electrical Configuration	
Gender	Standard
Form & Material	
Shell style / Model id	POB - Spanner for front nut
Locking system	Push-pull
Keying	3 keys (alpha=42, gamma=30, plug: male contacts, receptacle: female contacts)
Weight	3.05 g

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Environment	
Technical domain	Energy and Industrial, Medical, Test and Measurement, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP50
Temperature range	-50°C / +150°C
Steam sterilization	> 100 times (with potting on rear connection)
Cable fixation	
Cable termination protection	Standard back nut (no additional protection)

Drawings

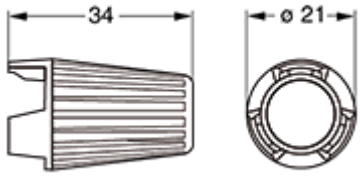

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.