

G-INS-M25-M68N-NNES-S - Cable gland



1411165

<https://www.phoenixcontact.com/us/products/1411165>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

Commercial data

Item number	1411165
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DAX
Catalog page	Page 688 (C-2-2019)
GTIN	4046356922999
Weight per piece (including packing)	51.2 g
Weight per piece (excluding packing)	49.38 g
Customs tariff number	74198090
Country of origin	TR

G-INS-M25-M68N-NNES-S - Cable gland



1411165

<https://www.phoenixcontact.com/us/products/1411165>

Technical data

Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---


Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BMBC-E3
Shielded	no
Execution of the strain relief	A

Characteristics

Category of shock impact	6
Design, Strain relief	A

Dimensions

Dimensional drawing	
Length	40 mm
Length of the connecting thread	8 mm
Hole diameter	25.1 mm ... 25.3 mm
Wrench size, union nut	27 mm
Wrench size, support	27 mm
Hexagon angular dimension	30 mm
Thread type connection side	M25 x 1.5
Thread pitch	1.5 mm

Connection data

Tightening torque	14 Nm \pm 1 Nm (Cap nut)
	6 Nm (Support sleeve)

Material specifications

Color	Brass
Material Compression ring	PA 6
Seal material O-ring	Perbunan
Seal material Cable seal	CR

G-INS-M25-M68N-NNES-S - Cable gland



1411165

<https://www.phoenixcontact.com/us/products/1411165>

Material for screw connection	Brass, nickel-plated
-------------------------------	----------------------

Cable/line

External cable diameter Cable 1	11 mm ... 17 mm
External cable diameter	14 mm ... 17 mm (for UL 514 B)
Halogen-free	no

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (5 bar, 30 min.)
	IP69 (DIN EN 60529 / IEC 60529)
Enclosure rating (NEMA)	4X
Ambient temperature (operation)	-40 °C ... 100 °C (static)

G-INS-M25-M68N-NNES-S - Cable gland


1411165

<https://www.phoenixcontact.com/us/products/1411165>



Drawings

Dimensional drawing

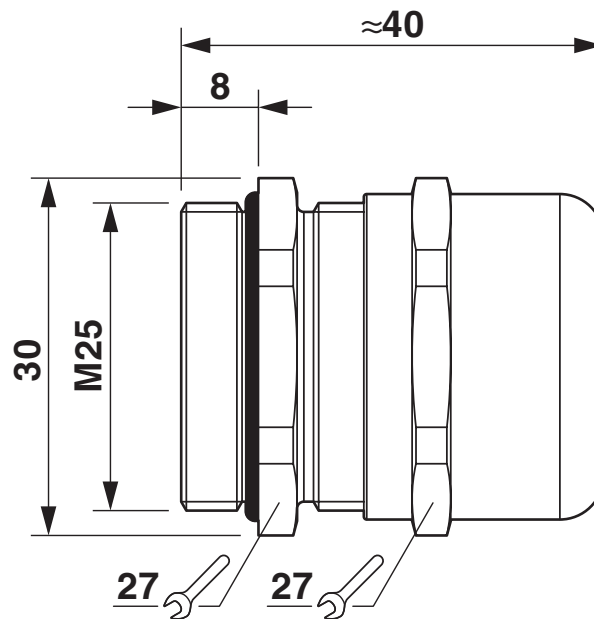

Dimensional drawing

G-INS-M25-M68N-NNES-S - Cable gland



1411165

<https://www.phoenixcontact.com/us/products/1411165>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1411165>

DNV
Approval ID: TAE00003WY

UL Listed
Approval ID: E199260

cUL Listed
Approval ID: E199260

cULus Listed

G-INS-M25-M68N-NNES-S - Cable gland



1411165

<https://www.phoenixcontact.com/us/products/1411165>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	a3cd6042-8586-469e-bb2f-c538262ee9ed

G-INS-M25-M68N-NNES-S - Cable gland

1411165

<https://www.phoenixcontact.com/us/products/1411165>



Accessories

A-INL-M25-N-S - Counter nut

1411243

<https://www.phoenixcontact.com/us/products/1411243>

Counter nut, for threads M25 x 1.5, color: silver



SEALING PLUG 14X22 RD - Closing cap

1400270

<https://www.phoenixcontact.com/us/products/1400270>

Closing cap, for threads pluggable, color: red



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com