



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE3075 Bright Red LED Display 2-Digit .560 Inch RHDP

Features:

- Common Cathode
- High Performance GaAsP
- Large, Easy to Read Digits
- Fast Switching – Excellent for Multiplexing
- Low Power Consumption
- Bold Solid Segments that are Highly Legible
- Solid State Reliability – Long Operation Life
- Rugged Plastic Construction
- Directly Compatible with Integrated Circuits
- High Brightness with High Contrast
- Wide Angle Viewing: 150°
- Low Forward Voltage
- Two-Digit Package Simplifies Alignment & Assembly

Applications:

- Digital Readout Displays
- Instrument Panels
- Point-of-Safe Equipment
- Digital Clocks
- TV and Radios

Absolute Maximum Ratings:

Power Dissipation ($T_A = +25^{\circ}\text{C}$), P_D	45mW
Derate Linearly from 50°C	$-13.7\text{mW}/^{\circ}\text{C}$
Continuous Forward Current, I_F	
Total	480mA
Per segment	15mA
Reverse Voltage (Per Segment and Decimal Point), V_R	5V
Operating Temperature Range, T_{opr}	-40° to $+85^{\circ}\text{C}$
Storage Temperature Range, T_{stg}	-40° to $+100^{\circ}\text{C}$
Lead Temperature (During Soldering for 5sec, Note 1 and Note 2), T_L	$+260^{\circ}\text{C} \pm 5^{\circ}\text{C}$
Thermal Resistance, Junction-to-Ambient, R_{thJA}	$160^{\circ}\text{C}/\text{W}$
Wavelength Temperature Coefficient (Case Temperature)	$3.0\lambda/^{\circ}\text{C}$
Forward Voltage Temperature Coefficient	$-2.0\text{mV}/^{\circ}\text{C}$

Note 1. Leads of the device immersed to 1/16 inch from the body. Maximum device surface temperature is $+140^{\circ}\text{C}$.

Note 2. For flux removal, Freon TF, Freon TE, Isoproponal or water may be used up to their boiling points.

Rev. 11-16







Electrical–Optical Characteristics: (Per Diode, $T_A = +25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Min	Typ	Max	Unit
Luminous Intensity, Digit Average	$I_F = 10\text{mA}$, Note 3	125	420	–	μcd
Peak Forward Current	Duty 1/10 @ 1kHz	–	–	50	mA
Peak Emission Wavelength		–	697	–	nm
Spectral Line Half Width		–	20	–	nm
Forward Voltage Segment	$I_F = 20\text{mA}$	–	–	2	V
Decimal Point	$I_F = 20\text{mA}$	–	–	2	V
Dynamic Resistance Segment	$I_F = 20\text{mA}$	–	2	–	Ω
Decimal Point	$I_F = 20\text{mA}$	–	2	–	Ω
Capacitance Segment	$V = 0$	–	35	–	pF
Decimal Point	$V = 0$	–	35	–	pF
Reverse Current Segment	$V_R = 5\text{V}$	–	–	100	μA
Decimal Point	$V_R = 5\text{V}$	–	–	100	μA

Note 5. The digit average Luminous Intensity is obtained by summing the Luminous Intensity of each segment and dividing the total number of segment as measured with a Photo Research Corp. "SPECTRA" Microcandela Meter (Model IV–D). Intensity will not vary more than $\pm 33.3\%$ between all segments within a digit.

Pin Connection Diagram

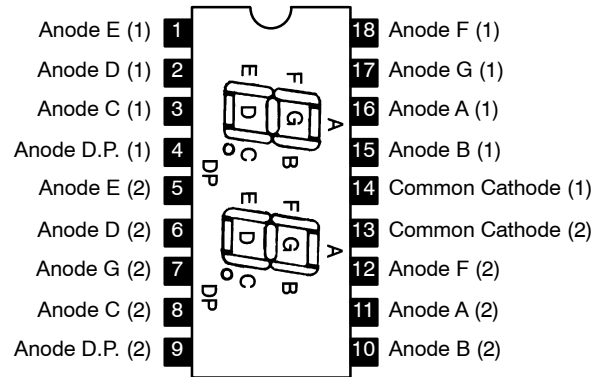

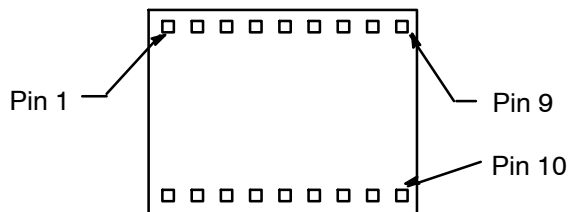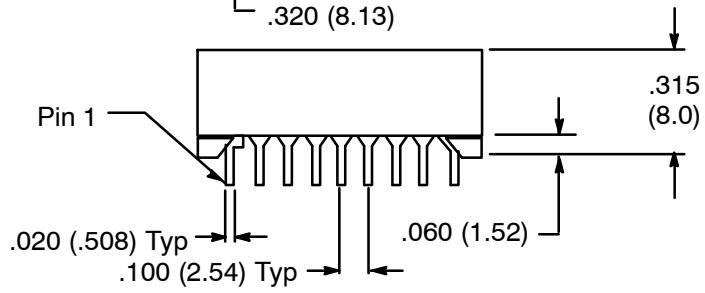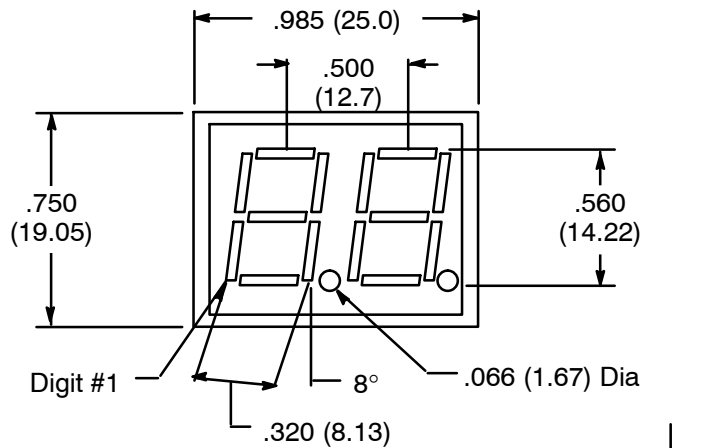

Bottom View

