

HC-M-12-CT-M - Contact insert module



1414354
<https://www.phoenixcontact.com/us/products/1414354>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 12, power contacts: 0, control contacts: 12, Pin, Crimp connection, 250 V, 10 A, 0.14 mm² ... 2.5 mm², application: Signal

Commercial data

Item number	1414354
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF62
Product key	BF7ACE
Catalog page	Page 581 (C-2-2019)
GTIN	4055626024677
Weight per piece (including packing)	9.16 g
Weight per piece (excluding packing)	8.92 g
Customs tariff number	85389099
Country of origin	PL

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

Technical data

Notes

General	For HEAVYCON housing type B6 to B48, HC-M-B...MF-... hinged module carrier frame required, CK1,6-ED... crimp contacts, crimp contacts not supplied as standard.
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
---------------	---

Product properties

Product type	Modular contact insert
Series	HC-M-12
Application	Signal
Number of positions	12
Connection profile	12
Contact numbering	1 - 12
Number of module slots	1
No. of power contacts	0
No. of control contacts	12
Contact material type	turned
	rolled

Data management status

Article revision	02
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection technology	Crimp connection
-----------------------	------------------

Conductor connection

Conductor cross section	0.14 mm² ... 2.5 mm²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm (6 mm with 2.5 mm²)

Dimensions


HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

Dimensional drawing



Width	34.2 mm
Height	34 mm
Length	14.6 mm

Mechanical characteristics

Minimum housing height	52 mm
Contact diameter	1.6 mm

Electrical properties

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
Rated current	10 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---


HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>


Drawings

Dimensional drawing

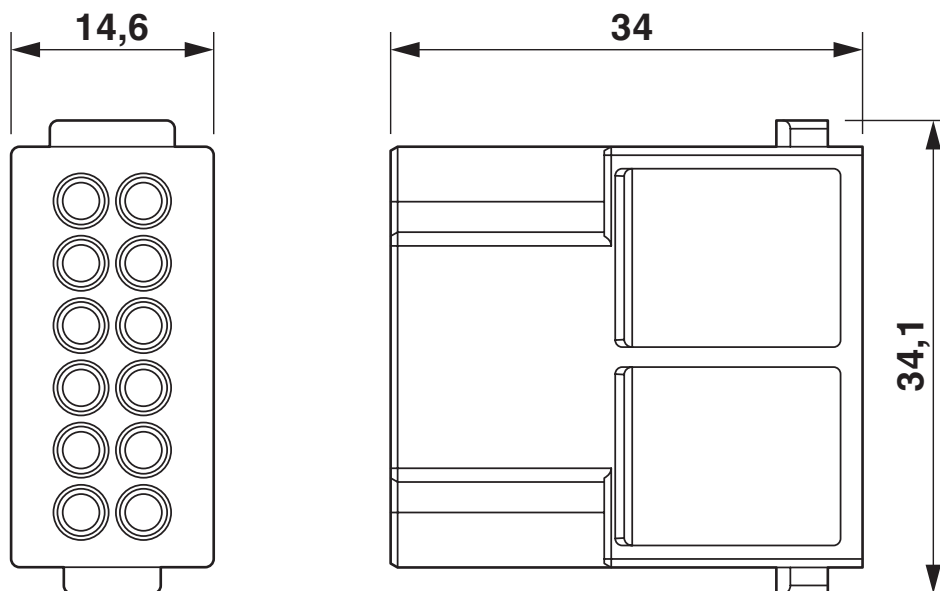

Male insert

Diagram

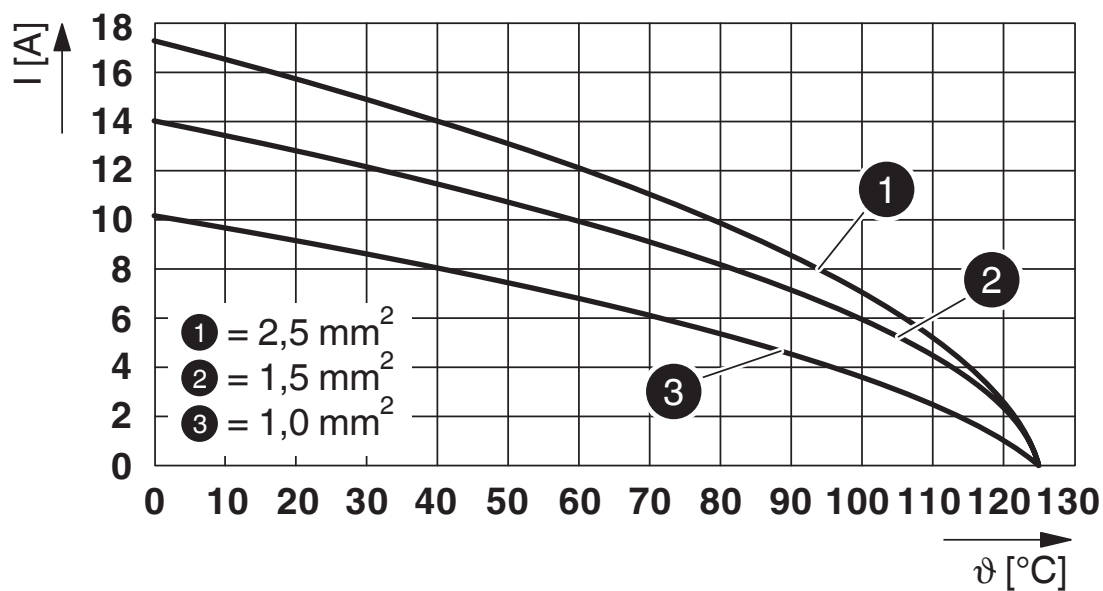

Derating diagram turned contacts


HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



Schematic diagram

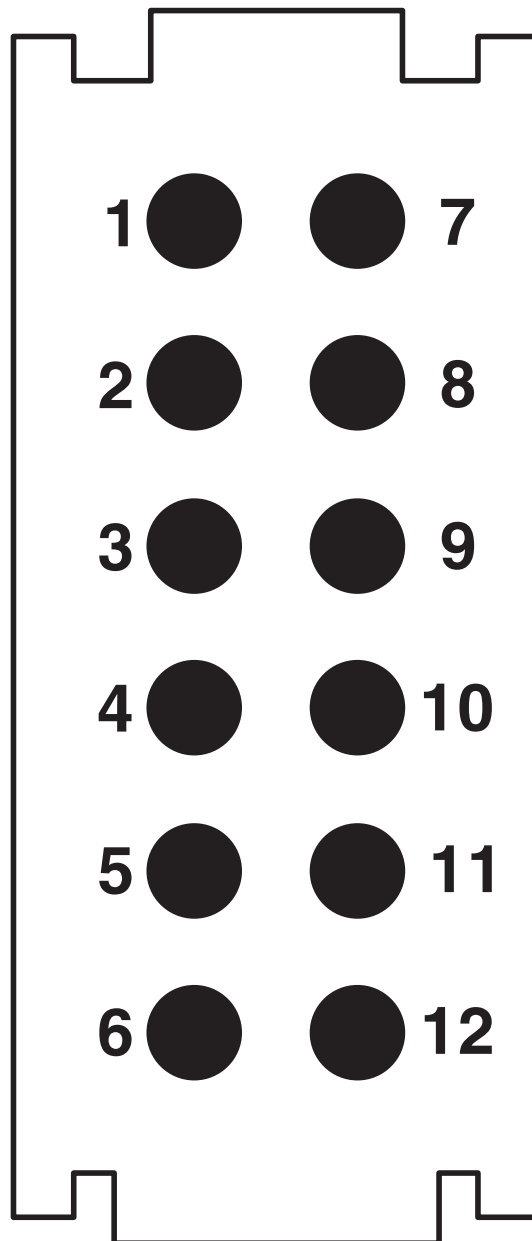

Connector pin assignment, connection side

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1414354>

DNV

Approval ID: TAE000037S



CSA

Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	- 14	-



UL Recognized

Approval ID: E118976

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	16 A	- 14	-



EAC

Approval ID: RU C-DE.BL08.B.00511



UL Recognized

Approval ID: E468743

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	16 A	-	-

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

Classifications

ECLASS

ECLASS-11.0	27440217
ECLASS-12.0	27440217
ECLASS-13.0	27440217

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

Accessories

HC-CBU-MOD - Coding element

1636130

<https://www.phoenixcontact.com/us/products/1636130>



Coding socket for coding up to 16 connectors, for HC Modular

HC-CST-MOD - Coding element

1636127

<https://www.phoenixcontact.com/us/products/1636127>



Coding peg for coding up to 16 connectors, for HC Modular

HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



HC-M-MHR-PE16 - Cable lug

1636981

<https://www.phoenixcontact.com/us/products/1636981>



Cable lug for HEAVYCON-MODULAR; PE connection extension to 16 mm², for crimping with crimp pliers

CK1,6-ED-0,37ST AG - Crimp contact

1663336

<https://www.phoenixcontact.com/us/products/1663336>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-0,50ST AG - Crimp contact

1663349

<https://www.phoenixcontact.com/us/products/1663349>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK1,6-ED-0,75ST AG - Crimp contact

1663352

<https://www.phoenixcontact.com/us/products/1663352>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-1,00ST AG - Crimp contact

1663365

<https://www.phoenixcontact.com/us/products/1663365>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK1,6-ED-1,50ST AG - Crimp contact

1663378

<https://www.phoenixcontact.com/us/products/1663378>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-2,50ST AG - Crimp contact

1663381

<https://www.phoenixcontact.com/us/products/1663381>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK1,6-ED-ST-POF - Pin contact

1884995

<https://www.phoenixcontact.com/us/products/1884995>



POF fiber optic pin contact, turned, for contact carriers (HC-DD...I-CT.../ HC-M-12-CT-.../ HC-M-17-CT-...) of CK1,6-ED... contacts

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-0,37M AG - Crimp contact

1266193

<https://www.phoenixcontact.com/us/products/1266193>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.34 mm², AWG 26 ... 22

CK1,6-ED-0,50M AG - Crimp contact

1266195

<https://www.phoenixcontact.com/us/products/1266195>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-1,50M AG - Crimp contact

1266245

<https://www.phoenixcontact.com/us/products/1266245>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK1,6-ED-0,75M AG - Crimp contact

1266450

<https://www.phoenixcontact.com/us/products/1266450>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-1,00M AG - Crimp contact

1266244

<https://www.phoenixcontact.com/us/products/1266244>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK1,6-ED-2,50M AG - Crimp contact

1266247

<https://www.phoenixcontact.com/us/products/1266247>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-0,37ST AU - Crimp contact

1674901

<https://www.phoenixcontact.com/us/products/1674901>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

CK1,6-ED-0,50ST AU - Crimp contact

1672453

<https://www.phoenixcontact.com/us/products/1672453>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-0,75ST AU - Crimp contact

1674914

<https://www.phoenixcontact.com/us/products/1674914>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK1,6-ED-1,00ST AU - Crimp contact

1674888

<https://www.phoenixcontact.com/us/products/1674888>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ED-1,50ST AU - Crimp contact

1674875

<https://www.phoenixcontact.com/us/products/1674875>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK1,6-ED-2,50ST AU - Crimp contact

1674927

<https://www.phoenixcontact.com/us/products/1674927>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-ER-1,00ST OIC AG - Crimp contact

1004360

<https://www.phoenixcontact.com/us/products/1004360>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17

CK1,6-ER-2,50ST OIC AG - Crimp contact

1004365

<https://www.phoenixcontact.com/us/products/1004365>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14

HC-M-12-CT-M - Contact insert module



1414354

<https://www.phoenixcontact.com/us/products/1414354>

CK1,6-BR-1,00ST OIC AG - Crimp contact

1004380

<https://www.phoenixcontact.com/us/products/1004380>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17, Taped products

CK1,6-BR-2,50ST OIC AG - Crimp contact

1004382

<https://www.phoenixcontact.com/us/products/1004382>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14, Taped products

HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



HC-M-B06-MFH-B - Module carrier frame

1182085

<https://www.phoenixcontact.com/us/products/1182085>



Module carrier frame, size: B6, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

HC-M-B10-MFH-B - Module carrier frame

1182088

<https://www.phoenixcontact.com/us/products/1182088>



Module carrier frame, size: B10, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



HC-M-B16-MFH-B - Module carrier frame

1182090

<https://www.phoenixcontact.com/us/products/1182090>

Module carrier frame, size: B16, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame



HC-M-B24-MFH-B - Module carrier frame

1182094

<https://www.phoenixcontact.com/us/products/1182094>

Module carrier frame, size: B24, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame



HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



HC-M-B06-MFH-H - Module carrier frame

1182087

<https://www.phoenixcontact.com/us/products/1182087>



Module carrier frame, size: B6, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame

HC-M-B10-MFH-H - Module carrier frame

1182089

<https://www.phoenixcontact.com/us/products/1182089>



Module carrier frame, size: B10, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame

HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



HC-M-B16-MFH-H - Module carrier frame

1182093

<https://www.phoenixcontact.com/us/products/1182093>

Module carrier frame, size: B16, type : for the sleeve side (A, B, C, ...), 4 mm² ...
6 mm², application: Module carrier frame



HC-M-B24-MFH-H - Module carrier frame

1182095

<https://www.phoenixcontact.com/us/products/1182095>

Module carrier frame, size: B24, type : for the sleeve side (A, B, C, ...), 4 mm² ...
6 mm², application: Module carrier frame



HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



HC-M-12-CT-F - Contact insert module

1414355

<https://www.phoenixcontact.com/us/products/1414355>



Contact insert module, number of positions: 12, power contacts: 0, control contacts: 12, Socket, Crimp connection, 250 V, 10 A, 0.14 mm² ... 2.5 mm², application: Signal

CRIMPFOX-1,6-ED-POF-N - Crimping pliers

1584839

<https://www.phoenixcontact.com/us/products/1584839>



Crimping pliers for turned fiber optics contacts CK1,6-ED...POF

HC-M-12-CT-M - Contact insert module

1414354

<https://www.phoenixcontact.com/us/products/1414354>



UNIFOX RT-CK 1.6 - Contact removal tool

1072069

<https://www.phoenixcontact.com/us/products/1072069>

Contact removal tool, for turned and rolled CK- 1.6-... contacts



UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/us/products/1089092>

Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com