

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

VARIOFACE module, with push-in connection and D-SUB miniature socket strip, for mounting on NS 35 rails, 9-pos.



Commercial data

Item number	2903778
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C423
Product key	CK2122
Catalog page	Page 554 (C-5-2019)
GTIN	4046356796538
Weight per piece (including packing)	70.2 g
Weight per piece (excluding packing)	89.01 g
Customs tariff number	85366990
Country of origin	US

2903778

<https://www.phoenixcontact.com/us/products/2903778>

Technical data

Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	9
No. of channels	9

Data management status

Article revision	06
------------------	----

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Nominal voltage U_N	25 V AC
	60 V DC
Max. current carrying capacity per branch	2 A
Rated surge voltage	1.2 kV

Connection data

Field level

Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Controller level

Connection method	D-SUB socket strip
Number of connections	1
Number of positions	9

Signaling

Status display	no
Status display present	No

Dimensions

Item dimensions

Width	36.8 mm
Height	72.1 mm
Depth	46.6 mm

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

Material specifications

Color	gray (RAL 7042)
Housing insulation material	Polyamide 6.6 green

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

VIP-2/PT/D 9SUB/F - Interface module


2903778

<https://www.phoenixcontact.com/us/products/2903778>



Drawings

Circuit diagram

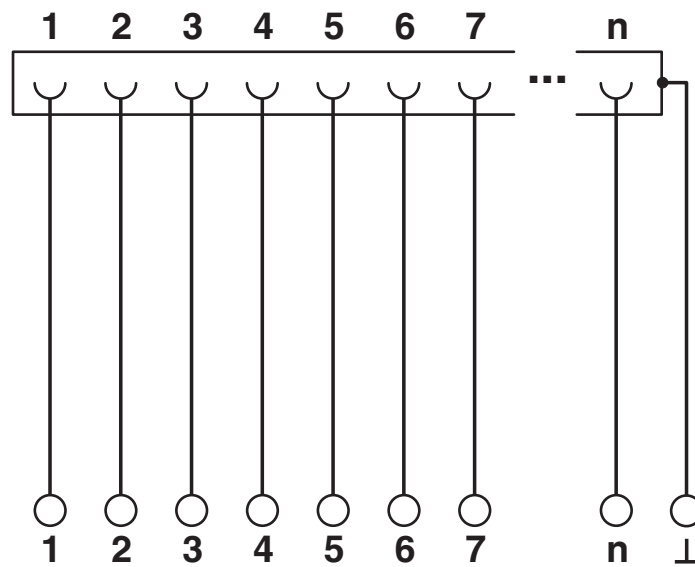

VIP-2/PT/D 9SUB/F - Interface module





2903778

<https://www.phoenixcontact.com/us/products/2903778>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2903778>

 CSA Approval ID: 2122203				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	105 V	2 A	26 - 14	-

 cUL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	2 A	26 - 14	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	2 A	26 - 14	-

 CSAus Approval ID: 2122203				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	105 V	2 A	28 - 14	-

cULus Recognized				
-------------------------	--	--	--	--

cCSAus				
---------------	--	--	--	--

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 9.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	35735398-1bfc-4bf6-9861-193a5254a7f8

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

Accessories

CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/us/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

CABLE D-SUB-S-S-S/.../.../... - Cable

2302434

<https://www.phoenixcontact.com/us/products/2302434>



Shielded round cable, assembled with two D-SUB pin strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

VIP-2/PT/D 9SUB/F - Interface module




2903778

<https://www.phoenixcontact.com/us/products/2903778>

UC-TM 4 - Marker for terminal blocks

0818111

<https://www.phoenixcontact.com/us/products/0818111>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>



UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

ZB 5,08:UNBEDRUCKT - Zack marker strip

0809793

<https://www.phoenixcontact.com/us/products/0809793>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>



ZB 22:UNBEDRUCKT - Zack marker strip

0811862

<https://www.phoenixcontact.com/us/products/0811862>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 22 mm, lettering field size: 10.5 x 21.8 mm, Number of individual labels: 4

CABLE-D 9SUB/B/S/ 50/KONFEK/S - Cable

2299987

<https://www.phoenixcontact.com/us/products/2299987>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 0.5 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>



CABLE-D 9SUB/B/S/100/KONFEK/S - Cable

2299990

<https://www.phoenixcontact.com/us/products/2299990>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

CABLE-D 9SUB/B/S/150/KONFEK/S - Cable

2300009

<https://www.phoenixcontact.com/us/products/2300009>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1.5 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>



CABLE-D 9SUB/B/S/200/KONFEK/S - Cable

2302010

<https://www.phoenixcontact.com/us/products/2302010>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

CABLE-D 9SUB/B/S/300/KONFEK/S - Cable

2302023

<https://www.phoenixcontact.com/us/products/2302023>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D 9SUB/B/S/400/KONFEK/S - Cable

2302036

<https://www.phoenixcontact.com/us/products/2302036>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 4 m

CABLE-D 9SUB/B/S/600/KONFEK/S - Cable

2302049

<https://www.phoenixcontact.com/us/products/2302049>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 6 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D 9SUB/B/S/HF/S/ 1,0M - Cable

1066591

<https://www.phoenixcontact.com/us/products/1066591>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

CABLE-D 9SUB/B/S/HF/S/ 2,0M - Cable

1066592

<https://www.phoenixcontact.com/us/products/1066592>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>



CABLE-D 9SUB/B/S/HF/S/ 3,0M - Cable

1066593

<https://www.phoenixcontact.com/us/products/1066593>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

CABLE-D 9SUB-B-S-HF-S/... - Cable

1075568

<https://www.phoenixcontact.com/us/products/1075568>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: variable

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D 9SUB/S/S/100/KONFEK/S - Cable

2305570

<https://www.phoenixcontact.com/us/products/2305570>



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 9-position);
connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

CABLE-D 9SUB/S/S/200/KONFEK/S - Cable

2305583

<https://www.phoenixcontact.com/us/products/2305583>



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 9-position);
connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>



CABLE-D 9SUB/S/S/300/KONFEK/S - Cable

2305596

<https://www.phoenixcontact.com/us/products/2305596>



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

CABLE-D 9SUB/S/S/HF/S/ 1,0M - Cable

1066594

<https://www.phoenixcontact.com/us/products/1066594>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D 9SUB/S/S/HF/S/ 2,0M - Cable

1066595

<https://www.phoenixcontact.com/us/products/1066595>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

CABLE-D 9SUB/S/S/HF/S/ 3,0M - Cable

1066596

<https://www.phoenixcontact.com/us/products/1066596>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D 9SUB-S-S-HF-S/... - Cable

1075567

<https://www.phoenixcontact.com/us/products/1075567>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: variable

CABLE-D- 9SUB/M/OE/0,25/S/0,5M - Cable

2926360

<https://www.phoenixcontact.com/us/products/2926360>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 0.5 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D- 9SUB/M/OE/0,25/S/1,0M - Cable

2926373

<https://www.phoenixcontact.com/us/products/2926373>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

CABLE-D- 9SUB/M/OE/0,25/S/1,5M - Cable

2926386

<https://www.phoenixcontact.com/us/products/2926386>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 1.5 m

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D- 9SUB/M/OE/0,25/S/2,0M - Cable

2926399

<https://www.phoenixcontact.com/us/products/2926399>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

CABLE-D- 9SUB/M/OE/0,25/S/3,0M - Cable

2926409

<https://www.phoenixcontact.com/us/products/2926409>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

VIP-2/PT/D 9SUB/F - Interface module

2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D- 9SUB/M/OE/0,25/S/4,0M - Cable

2926412

<https://www.phoenixcontact.com/us/products/2926412>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 4 m

CABLE-D- 9SUB/M/OE/0,25/S/6,0M - Cable

2926425

<https://www.phoenixcontact.com/us/products/2926425>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: 6 m

VIP-2/PT/D 9SUB/F - Interface module



2903778

<https://www.phoenixcontact.com/us/products/2903778>

CABLE-D- 9SUB-M-OE-0,25-S/... - Cable

2900909

<https://www.phoenixcontact.com/us/products/2900909>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 9-position); cable length: variable

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com