

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 5+PE, size: D7, number of connections per position: 1, Socket, Crimp connection, 230 V/400 V, 20 A, 0.5 mm² ... 2.5 mm², application: Power

Commercial data

Item number	1406537
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	BF7ABJ
Catalog page	Page 509 (C-2-2019)
GTIN	4046356932356
Weight per piece (including packing)	16 g
Weight per piece (excluding packing)	15.7 g
Customs tariff number	85366990
Country of origin	CN

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



Technical data

Notes

General	for HC-D7 housing, CK2,5-ED crimp contacts (crimp contacts not included in scope of supply)
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
---------------	---


Product properties

Product type	Contact insert with a fixed no. of positions
Series	HC-Q
Application	Power
Type	D7
Number of positions	5
Connection profile	5+PE
Contact numbering	1 - 5
Number of connections per position	1
Contact material type	turned

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	21 mm
Height	40.1 mm
Length	21 mm

Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

Connection data

Connection technology

Connection technology	Crimp connection
Number of connections per position	1
Connection in acc. with standard	IEC / EN

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



Conductor connection

Conductor cross section	0.5 mm² ... 2.5 mm² (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	20 ... 14
Connection cross section PE contact	0.5 mm² ... 2.5 mm²
Connection cross section PE contact AWG	20 ... 14
Tightening torque	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
Stripping length of the individual wire	7.5 mm

Electrical properties

Rated voltage (III/3)	230 V (Conductor-PE)
	400 V (Conductor-Conductor)
Rated voltage for power contacts	230/400 V
Rated surge voltage	4 kV
Rated current	20 A (power contacts)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

HC-Q05-I-CT-F - Contact insert


1406537

<https://www.phoenixcontact.com/us/products/1406537>




Drawings

Diagram

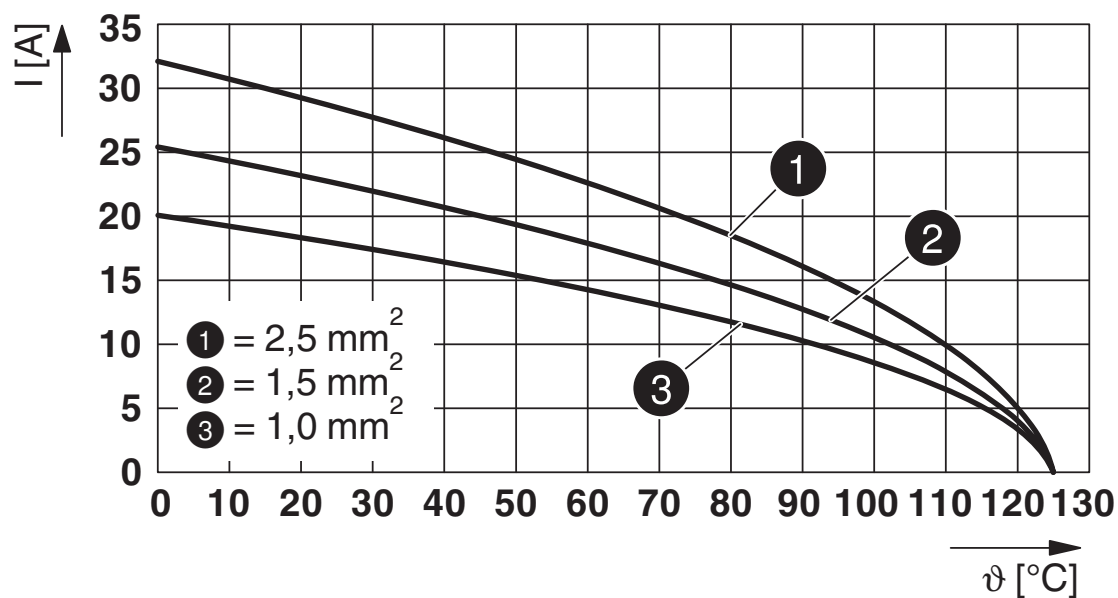

Derating diagram

Dimensional drawing

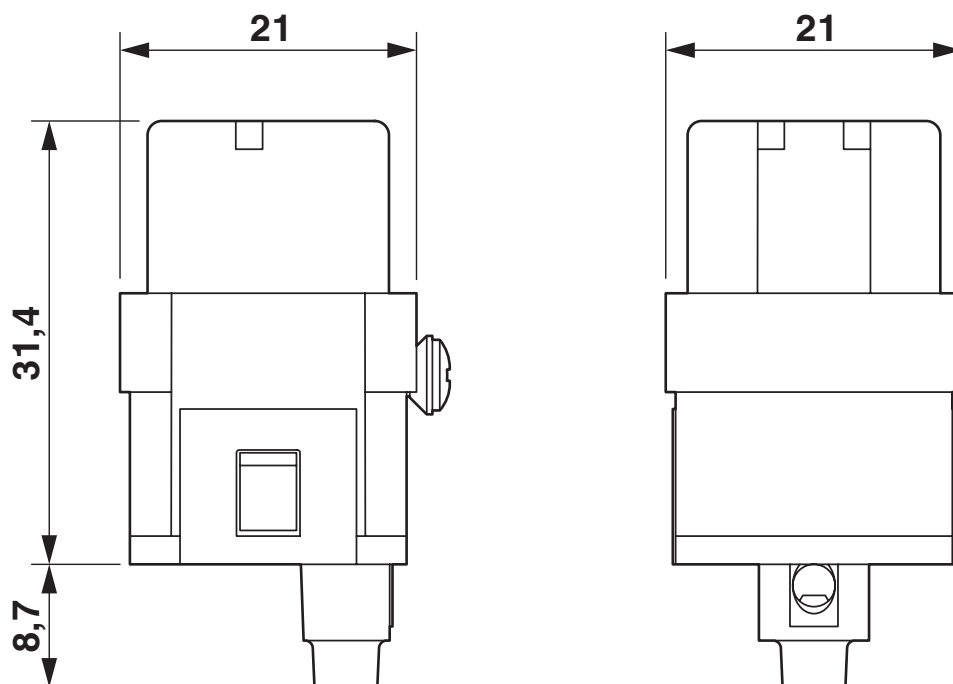

Female insert



HC-Q05-I-CT-F - Contact insert



1406537

<https://www.phoenixcontact.com/us/products/1406537>

Schematic diagram

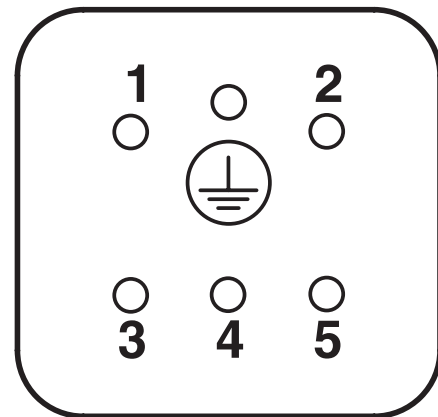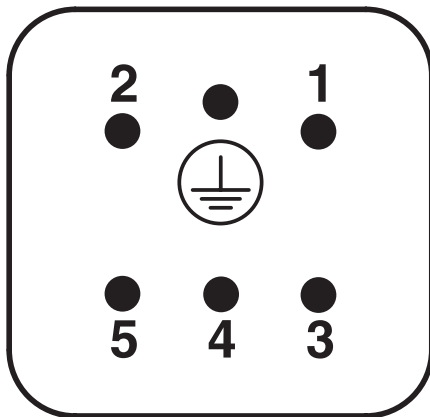

Contact-side pin assignment

HC-Q05-I-CT-F - Contact insert



1406537

<https://www.phoenixcontact.com/us/products/1406537>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1406537>

DNV

Approval ID: TAE000037S



CSA

Approval ID: 013631_0_000

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	15 A	- 14	-



UL Recognized

Approval ID: FILE E 118976

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	24 A	- 14	-



EAC

Approval ID: RU C-DE.BL08.B.00511



UL Recognized

Approval ID: E468743

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	24 A	-	-

HC-Q05-I-CT-F - Contact insert



1406537

<https://www.phoenixcontact.com/us/products/1406537>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	796c9283-a8fe-41b3-a3cd-96aee412b89e

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



Accessories

HC-CP-CK2.5-PL - Coding element

1095419

<https://www.phoenixcontact.com/us/products/1095419>

Dummy socket for contact carrier with turned CK 2,5-ED... socket contacts. For HC-A../HC-BB../HC-M... series contact inserts.



HC-D 7-DS-IP65 - Sealing screw

1686229

<https://www.phoenixcontact.com/us/products/1686229>

Sealing screw, size: Countersunk head, IP67, replacement part for D7 size HEAVYCON housing



HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-0,50BU AG - Crimp contact

1663640

<https://www.phoenixcontact.com/us/products/1663640>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK2,5-ED-0,75BU AG - Crimp contact

1663653

<https://www.phoenixcontact.com/us/products/1663653>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-1,00BU AG - Crimp contact

1663666

<https://www.phoenixcontact.com/us/products/1663666>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 1 mm², AWG 18

CK2,5-ED-1,50BU AG - Crimp contact

1663679

<https://www.phoenixcontact.com/us/products/1663679>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-2,50BU AG - Crimp contact

1663682

<https://www.phoenixcontact.com/us/products/1663682>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK2,5-ED-3,00BU AG - Crimp contact

1663695

<https://www.phoenixcontact.com/us/products/1663695>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 3 mm² ... 3 mm², AWG 12

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-4,00BU AG - Crimp contact

1663705

<https://www.phoenixcontact.com/us/products/1663705>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

CK2,5-ED-0,50F AG - Crimp contact

1273612

<https://www.phoenixcontact.com/us/products/1273612>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-0,75F AG - Crimp contact

1273611

<https://www.phoenixcontact.com/us/products/1273611>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK2,5-ED-1,00F AG - Crimp contact

1273610

<https://www.phoenixcontact.com/us/products/1273610>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-1,50F AG - Crimp contact

1273609

<https://www.phoenixcontact.com/us/products/1273609>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK2,5-ED-2,50F AG - Crimp contact

1273607

<https://www.phoenixcontact.com/us/products/1273607>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-3,00F AG - Crimp contact

1273606

<https://www.phoenixcontact.com/us/products/1273606>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 3 mm² ... 3 mm², AWG 12

CK2,5-ED-4,00F AG - Crimp contact

1273604

<https://www.phoenixcontact.com/us/products/1273604>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-0,37BU AU - Crimp contact

1585647

<https://www.phoenixcontact.com/us/products/1585647>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 22 ... 26

CK2,5-ED-0,50BU AU - Crimp contact

1674859

<https://www.phoenixcontact.com/us/products/1674859>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-1,00BU AU - Crimp contact

1674833

<https://www.phoenixcontact.com/us/products/1674833>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.75 mm² ... 1 mm², AWG 18

CK2,5-ED-1,50BU AU - Crimp contact

1674820

<https://www.phoenixcontact.com/us/products/1674820>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-2,50BU AU - Crimp contact

1674862

<https://www.phoenixcontact.com/us/products/1674862>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK2,5-ED-4,00BU AU - Crimp contact

1674846

<https://www.phoenixcontact.com/us/products/1674846>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-0,37F AU - Crimp contact

1273567

<https://www.phoenixcontact.com/us/products/1273567>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 22 ... 26

CK2,5-ED-0,50F AU - Crimp contact

1273564

<https://www.phoenixcontact.com/us/products/1273564>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-1,00F AU - Crimp contact

1271379

<https://www.phoenixcontact.com/us/products/1271379>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK2,5-ED-1,50F AU - Crimp contact

1271375

<https://www.phoenixcontact.com/us/products/1271375>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



CK2,5-ED-2,50F AU - Crimp contact

1271376

<https://www.phoenixcontact.com/us/products/1271376>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK2,5-ED-4,00F AU - Crimp contact

1271372

<https://www.phoenixcontact.com/us/products/1271372>



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: gold-plated, connection cross section: 4 mm² ... 4 mm², AWG 12

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



HC-Q05-I-CT-M - Contact insert

1406538

<https://www.phoenixcontact.com/us/products/1406538>



Contact insert, number of positions: 5+PE, size: D7, number of connections per position: 1, Pin, Crimp connection, 230 V/400 V, 20 A, 0.5 mm² ... 2.5 mm², application: Power

UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/us/products/1089092>



Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections

HC-Q05-I-CT-F - Contact insert

1406537

<https://www.phoenixcontact.com/us/products/1406537>



UNIFOX RT-CK 2.5 - Contact removal tool

1072067

<https://www.phoenixcontact.com/us/products/1072067>

Contact removal tool, for turned CK 2,5... contacts



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com