
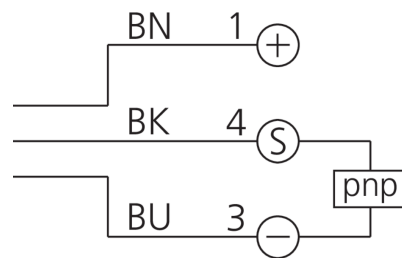


Induktiver Schlauchsensor

-
- A blue rectangular electronic component, likely a power supply or converter, with a silver connector on the left and a label on top. The label contains technical specifications and a CE mark.

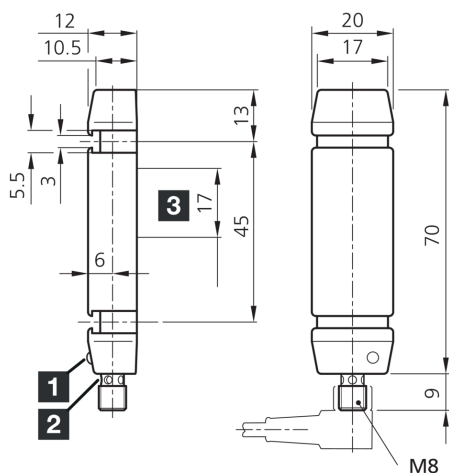

BU: blau

+20°C, 24 V DC





204158
ISDP 70 PSK-TSSL
Induktiver Schlauchsensor

Technische Daten (typ.)**+20°C, 24 V DC**

Ansprechzeit	0,20 ms
Abfallzeit	100 ms
Schock-/Schwingbeanspruchung	30 g, 11 ms / 10 ... 55 Hz, 1,0 mm
Umgebungstemperatur Betrieb	-25 ... +70 °C
Schutzart	IP 67
Anschluss	Stecker, M8, 3-polig
Anschlusskabel	TK ...

Weitere Informationen / Zubehör**<https://www.di-soric.com/204158>**