

Specification

PATENT PENDING

- Part No. : **MA931.A.LBICGH.001**
- Product Name : MA931 Guardian 6in1 Adhesive Mount Antenna
GNSS+LTE*2+Wi-Fi*3
- Features : Low-profile Housing – Mounts flush to Wall
1*GPS-GLONASS-GALILEO-BeiDou Antenna
2*LTE MIMO 698-960MHz/1710-2170MHz/
2490-2690MHz/ 3300-3600MHz
3*Wi-Fi MIMO 2.4GHz/5.8GHz
Worldwide 4G Bands including 3G and 2G
IP67 Waterproof Enclosure
Dims: 146*134*20mm
1m Low Loss KSR200-P and RG174 with
SMA(M)/RP-SMA(M) connectors
Cables and Connectors Customizable
RoHS & REACH Compliant
Also available in White



1. Introduction

The MA931 Guardian is a next generation combination antenna. The first panel antenna worldwide designed for IoT Gateway and Router devices. It is a low profile 6in1 wall and adhesive mount antenna. It is a heavy-duty, fully IP67 waterproof external M2M antenna for use by RF professionals in IoT Gateway and Routers, HD Video Streaming, Transportation and Remote Monitoring Applications.

This antenna delivers powerful MIMO antenna technology for worldwide 4G LTE bands at 698-960MHz /1710-2170MHz /2490-2690MHz /3300-3600MHz, dual-band 2.4/5.8GHz Wi-Fi, plus GPS-GLONASS-GALILEO-BeiDou for location accuracy. It enables designers to cover a wide range of technologies by installing a single antenna.

4G wireless applications demand high speed data uplink and downlink. High efficiency and high gain MIMO antennas are necessary to achieve the required signal to noise ratio and throughput required to solve these challenges. Taoglas also takes care to have high isolation among these antennas to prevent self-interference. Low loss cables used to keep efficiency high over long cable lengths.

The GPS-GLONASS-GALILEO-BeiDou active antenna has been carefully designed for excellent performance across all GNSS bands, leading to higher location accuracy and stability of tracking in urban environments.

The housing is IP67 waterproof and comes with a 3M foam adhesive. The antenna can be mounted internally or externally on a vehicle. The MA931 comes with 1 meter, low loss KSR-200P coaxial cables for the LTE and Wi-Fi antennas, and RG174 coaxial cable for the GNSS antenna as standard. Customized cables and connector versions are also available.

2. Specification

GPS-GLONASS-GALILEO-BeiDou				
Center Frequency	GPS/GALILEO: 1575.42±1.023MHz GLONASS: 1602±5MHz BeiDou: 1561.098±2.046MHz			
Passive Antenna Efficiency (without cable loss)	GPS/GALILEO: 48% GLONASS: 57% BeiDou: 63%			
Passive Antenna Average Gain (without cable loss)	GPS/GALILEO: -3.13dBi GLONASS: -2.39dBi BeiDou: -1.97dBi			
Passive Antenna Peak Gain (without cable loss)	GPS/GALILEO: 1.98dBi GLONASS: 3.01dBi BeiDou: 3dBi			
VSWR	3:1 Max			
Impedance	50Ω			
Axial Ratio	GPS/GALILEO: <14.02 GLONASS: <5.9 BeiDou: <9.7			
Polarization	RHCP			
Cable	1 meter RG174 standard, fully customizable			
Connector	SMA(M) standard, fully customizable			
LNA and Filter Electrical Properties				
Center Frequency	GPS/GALILEO: 1575.42±1.023MHz GLONASS: 1602±5MHz BeiDou: 1561.098±2.046MHz			
Output Impedance	50Ω			
VSWR	< 2:1			
Return Loss	10dB Min.			
LNA Gain, Current Draw, and Noise Figure @GPS	Voltage	LNA Gain (Typ)	Current Draw (Typ)	Noise Figure (Typ)
	Min 1.8V	28dB	7.9mA	1.13dB
	Typ 3.0V	30dB	9.0mA	1.13dB
	Max 5.5V	33dB	9.9mA	1.14dB
Total Specification (Through Antenna, SAW Filter, and LNA)				
Frequency	1561.098±2.046MHz	1575.42±1.023MHz	1602±5MHz	
Gain@3V	1561MHz: 28±3dBi	1575.42MHz: 28±3dBi	1602MHz: 28±3dBi	
Output Impedance	50Ω			

4G/3G/2G LTE Antenna

Frequency (MHz)		LTE700	GSM850	GSM900	DCS	PCS	UMTS1	LTE2600	LTE3500
		698~803	824~894	880~960	1710~1880	1850~1990	1920~2170	2490~2690	3300~3600
Efficiency (%)									
MIMO_1	Free space	50.82	55.85	41.29	66.47	70.19	71.51	49.20	50.92
	ABS	68.31	69.61	61.27	66.31	70.86	70.00	50.61	51.88
	Glass	67.99	67.37	62.94	66.89	71.80	69.58	51.00	52.83
	Metal	42.12	51.55	58.33	39.49	47.20	47.71	44.36	44.85
	Wall	67.97	70.42	66.80	63.91	64.94	63.35	50.37	51.49
MIMO_2	Free space	54.13	58.97	48.65	61.54	68.31	68.39	54.62	52.55
	ABS	71.74	66.05	58.58	63.18	69.29	69.23	53.95	54.95
	Glass	64.53	55.70	45.22	64.94	67.87	65.86	50.05	51.77
	Metal	55.62	63.13	56.59	32.14	40.89	43.97	54.22	52.90
	Wall	61.91	48.38	52.88	58.00	56.47	56.36	54.68	48.72
Average Gain (dBi)									
MIMO_1	Free space	-2.96	-2.62	-3.85	-1.78	-1.54	-1.46	-3.12	-2.96
	ABS	-1.68	-1.59	-2.13	-1.79	-1.50	-1.55	-3.00	-2.87
	Glass	-1.73	-1.73	-2.02	-1.75	-1.44	-1.58	-2.96	-2.79
	Metal	-3.94	-2.88	-2.37	-4.07	-3.27	-3.23	-3.57	-3.51
	Wall	-1.70	-1.53	-1.76	-1.95	-1.88	-1.99	-3.00	-2.89
MIMO_2	Free space	-2.72	-2.32	-3.17	-2.11	-1.66	-1.66	-2.65	-2.83
	ABS	-1.47	-1.81	-2.33	-2.00	-1.59	-1.60	-2.71	-2.63
	Glass	-1.93	-2.56	-3.46	-1.88	-1.68	-1.82	-3.04	-2.87
	Metal	-2.61	-2.00	-2.50	-4.95	-3.90	-3.59	-2.67	-2.77
	Wall	-2.09	-3.15	-2.79	-2.37	-2.48	-2.50	-2.63	-3.15
Peak Gain (dBi)									
MIMO_1	Free space	3.18	3.60	2.14	3.98	4.37	4.37	3.70	4.49
	ABS	4.65	4.00	3.45	5.24	6.05	6.05	4.69	3.18
	Glass	3.71	3.92	4.35	5.28	6.16	7.67	5.34	3.87
	Metal	5.09	3.10	4.73	4.50	4.96	5.69	6.02	4.96
	Wall	4.74	4.97	3.67	5.44	4.84	4.84	5.08	3.75
MIMO_2	Free space	5.83	3.66	2.57	3.78	4.01	4.01	3.87	3.97
	ABS	4.33	4.52	4.41	4.34	4.73	5.69	5.64	5.42
	Glass	3.02	3.14	1.36	4.99	5.89	6.02	6.18	4.42
	Metal	3.54	3.11	3.33	3.12	4.36	5.02	7.16	4.95
	Wall	3.21	1.77	2.15	5.49	5.49	7.20	6.10	4.74
Impedance				50Ω					
Polarization				Linear					
VSWR				< 3					
Cable				1 meter KSR200-P standard, fully customizable					
Connector				SMA(M) standard, fully customizable					

2.4GHz/5.8GHz Wi-Fi Antenna			
Frequency (MHz)	2400~2500	4900~5850	
Efficiency (%)			
MIMO_1	Free space	57.73	48.06
	ABS	53.59	49.42
	Glass	53.98	47.16
	Metal	51.80	46.70
	Wall	61.02	46.29
MIMO_2	Free space	44.09	47.04
	ABS	46.34	46.79
	Glass	40.79	46.88
	Metal	45.58	45.59
	Wall	50.62	43.60
MIMO_3	Free space	68.05	54.35
Average Gain (dBi)			
MIMO_1	Free space	-2.39	-3.25
	ABS	-2.71	-3.13
	Glass	-2.68	-3.36
	Metal	-2.86	-3.44
	Wall	-2.15	-3.42
MIMO_2	Free space	-3.57	-3.33
	ABS	-3.37	-3.36
	Glass	-3.91	-3.35
	Metal	-3.45	-3.52
	Wall	-2.96	-3.67
MIMO_3	Free space	-1.67	-2.66
Peak Gain (dBi)			
MIMO_1	Free space	4.35	4.84
	ABS	5.34	5.18
	Glass	2.99	5.03
	Metal	5.22	5.98
	Wall	5.47	5.77
MIMO_2	Free space	2.94	5.70
	ABS	2.18	5.43
	Glass	3.75	7.07
	Metal	6.02	6.76
	Wall	3.23	5.97
MIMO_3	Free space	6.3	4.06

2.4GHz/5.8GHz Wi-Fi Antenna	
Impedance	50Ω
Polarization	Linear
VSWR	< 3
Cable	1 meter KSR200-P standard, fully customizable
Connector	RP-SMA(M) standard, fully customizable

Mechanical	
Antenna Dimensions	146*134*20mm
Casing	ASA
Weight (including cable)	438g
Ingress Protection Rating	IP67
Environmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

2.1. LTE Bands Covered while on metal Ground Plane

LTE BANDS				
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
	Uplink	Downlink	MIMO 1	MIMO 2
1	UL: 1920 to 1980	DL: 2110 to 2170	✓	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓
5	UL: 824 to 849	DL: 869 to 894	✓	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓	✓
8	UL: 880 to 915	DL: 925 to 960	✓	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗	✗
12	UL: 699 to 716	DL: 729 to 746	✓	✓
13	UL: 777 to 787	DL: 746 to 756	✓	✓
14	UL: 788 to 798	DL: 758 to 768	✓	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓	✓
18	UL: 815 to 830	DL: 860 to 875 (LTE only)	✓	✓
19	UL: 830 to 845	DL: 875 to 890	✓	✓
20	UL: 832 to 862	DL: 791 to 821	✓	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✓	✓
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓	✗
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓
26	UL: 814 to 849	DL: 859 to 894	✓	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗	✗
32	UL: -	DL: 1452 - 1496	✗	✗
35		1850 to 1910	✓	✓
38		2570 to 2620	✓	✓
39		1880 to 1920	✓	✓
40		2300 to 2400	✓	✓
41		2496 to 2690	✓	✓
42		3400 to 3600	✓	✓
43		3600 to 3800	✓	✓

*Covered bands represent an efficiency greater than 20%

2.2. LTE Bands Covered in Free Space


LTE BANDS				
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
	Uplink	Downlink	MIMO 1	MIMO 2
1	UL: 1920 to 1980	DL: 2110 to 2170	✓	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓
5	UL: 824 to 849	DL: 869 to 894	✓	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓	✓
8	UL: 880 to 915	DL: 925 to 960	✓	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗	✗
12	UL: 699 to 716	DL: 729 to 746	✓	✓
13	UL: 777 to 787	DL: 746 to 756	✓	✓
14	UL: 788 to 798	DL: 758 to 768	✓	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓	✓
18	UL: 815 to 830	DL: 860 to 875 (LTE only)	✓	✓
19	UL: 830 to 845	DL: 875 to 890	✓	✓
20	UL: 832 to 862	DL: 791 to 821	✓	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✓	✓
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓
26	UL: 814 to 849	DL: 859 to 894	✓	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗	✗
32	UL: -	DL: 1452 - 1496	✓	✓
35		1850 to 1910	✓	✓
38		2570 to 2620	✓	✓
39		1880 to 1920	✓	✓
40		2300 to 2400	✓	✓
41		2496 to 2690	✓	✓
42		3400 to 3600	✓	✓
43		3600 to 3800	✓	✓

*Covered bands represent an efficiency greater than 20%

3. Antenna Characteristics

3.1. GPS-GLONASS-GALILEO-BeiDou


3.1.1. Block Diagram (Active antenna)

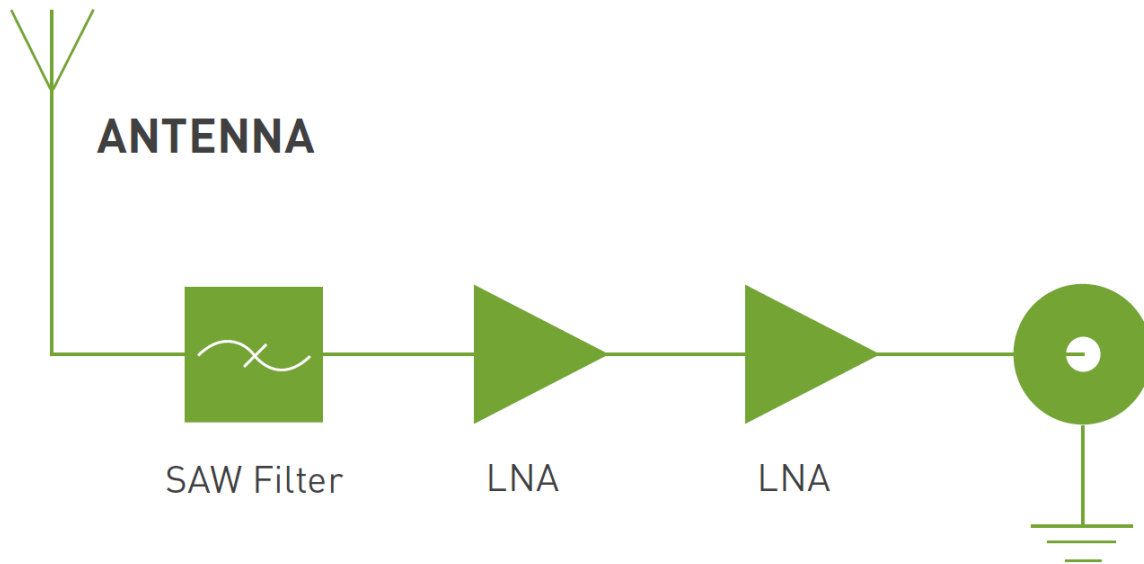


3.1.2. Test Setup




3.1.3. GPS-GLONASS-GALILEO-BeiDou Return Loss (Passive antenna)

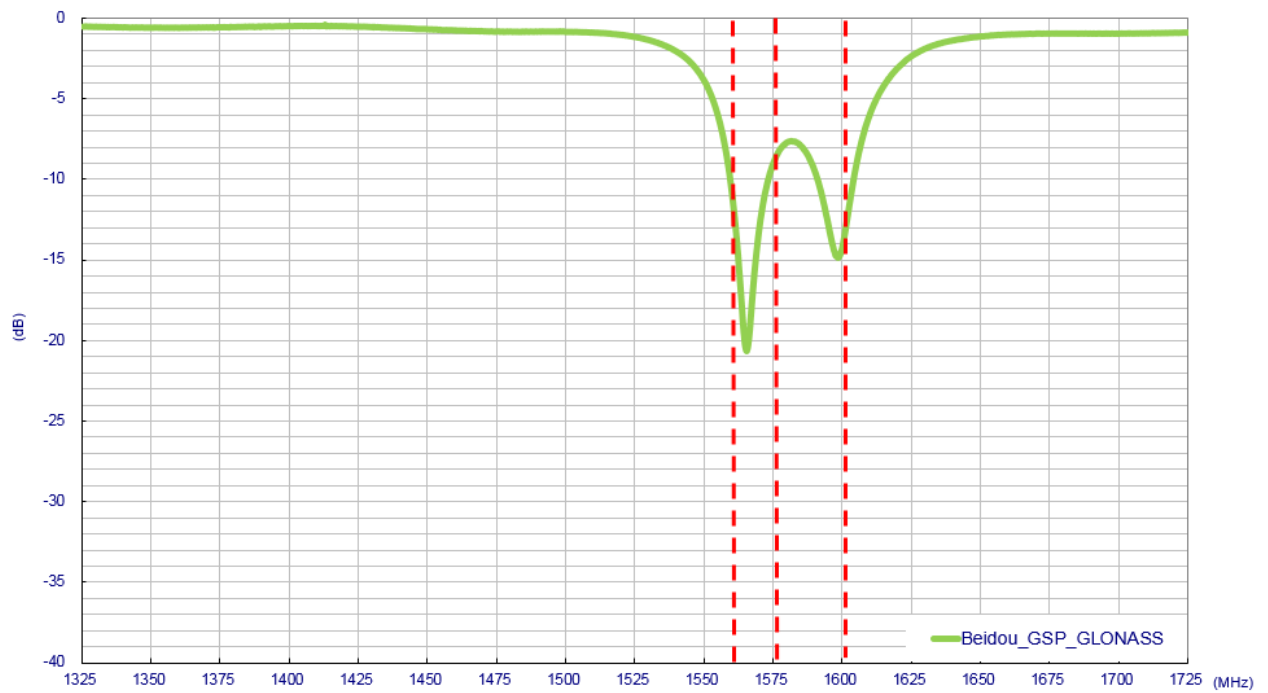


3.1.4. GPS-GLONASS-GALILEO-BeiDou Smith Chart (Passive antenna)

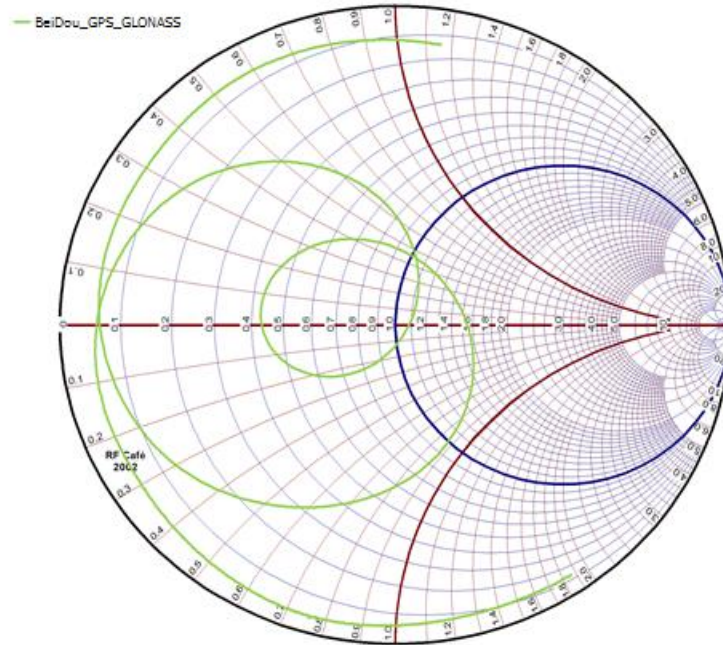


3.1.5. GPS-GLONASS-GALILEO-BeiDou Efficiency (Passive antenna)

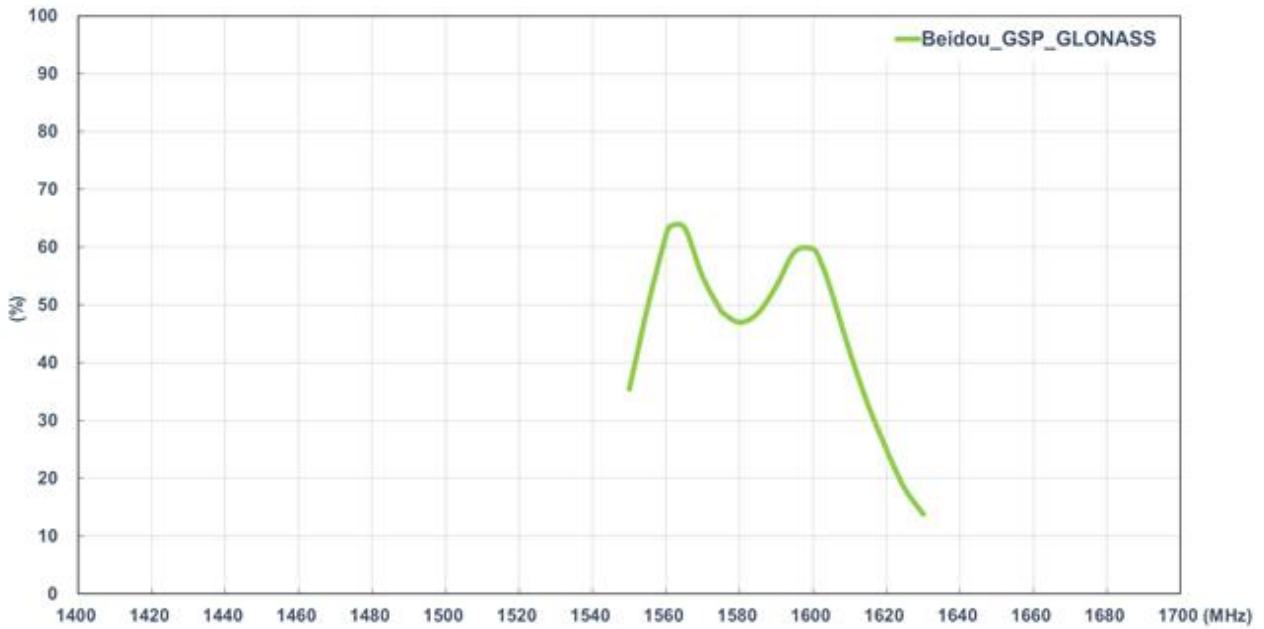

3.1.6. GPS-GLONASS-GALILEO-BeiDou Peak Gain (Passive antenna)



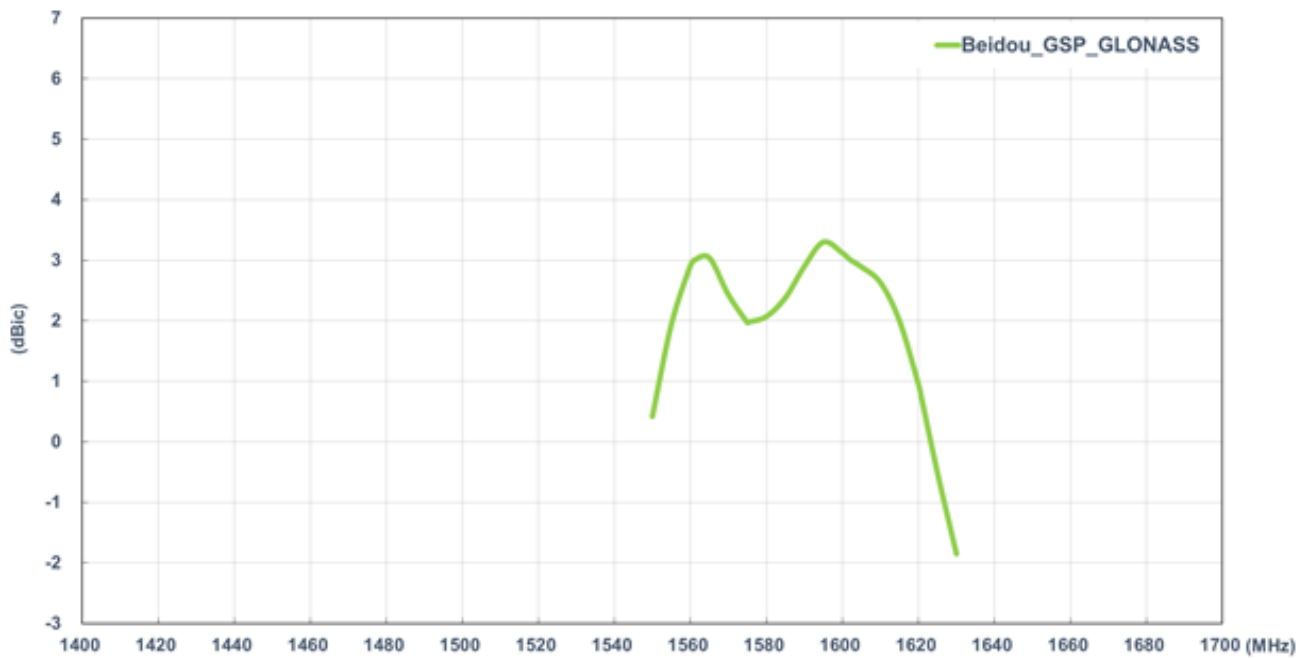


3.1.7. GPS-GLONASS-GALILEO-BeiDou Average Gain (Passive antenna)

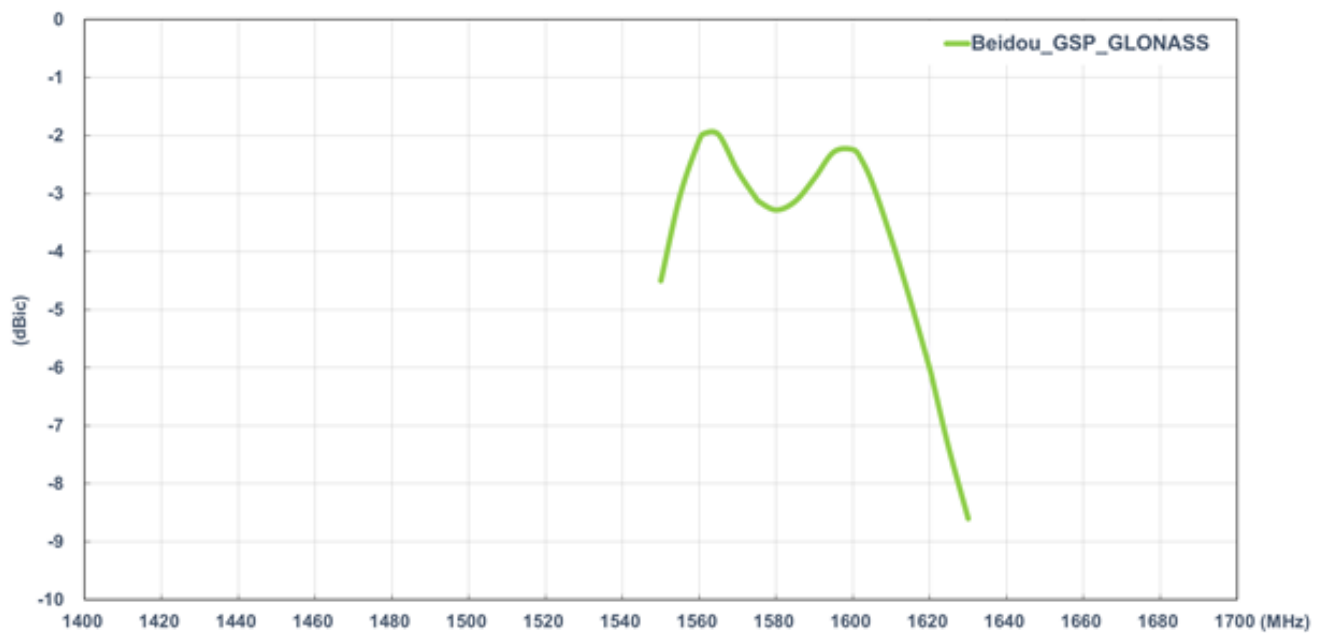


3.1.8. GPS-GLONASS-GALILEO-BeiDou Radiation Pattern (Passive antenna)


2D Radiation Pattern

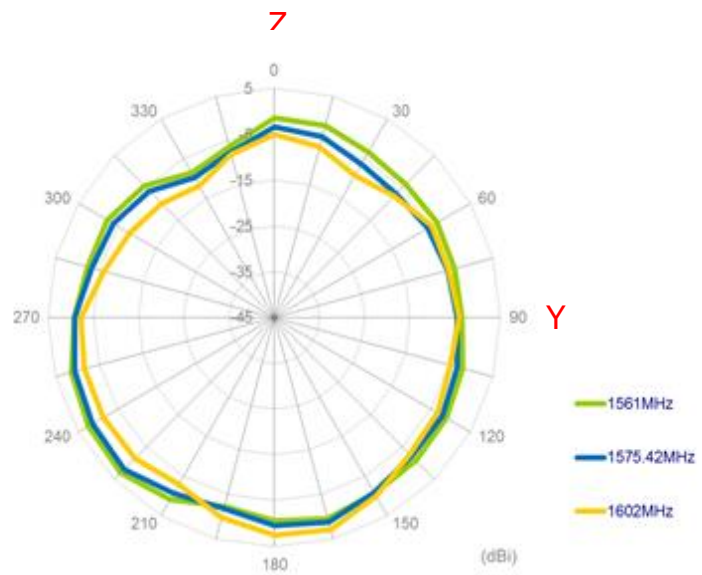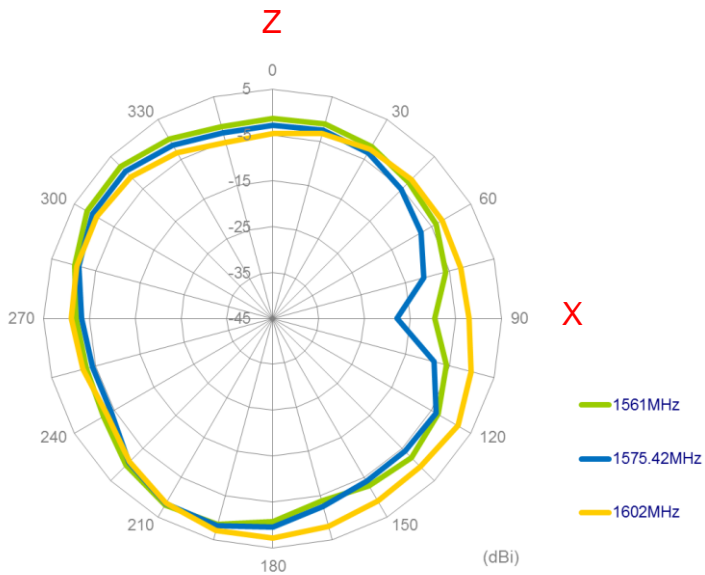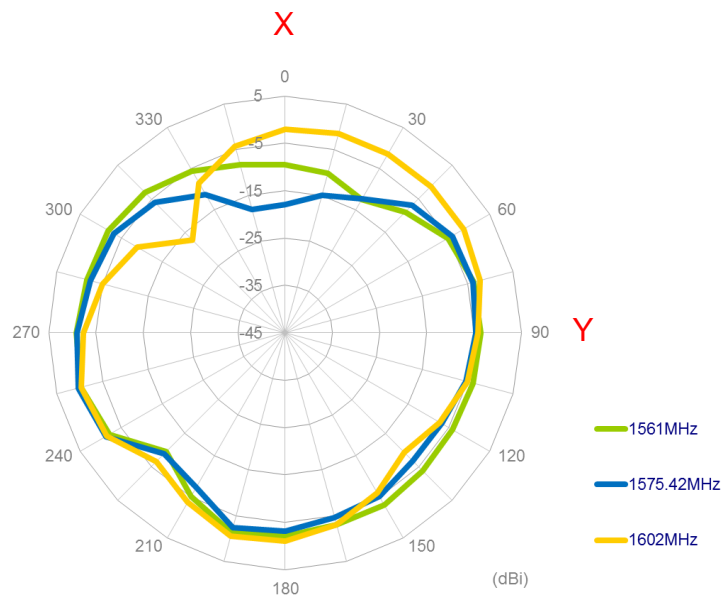


3.1.9. 3D Radiation Pattern (Passive antenna)

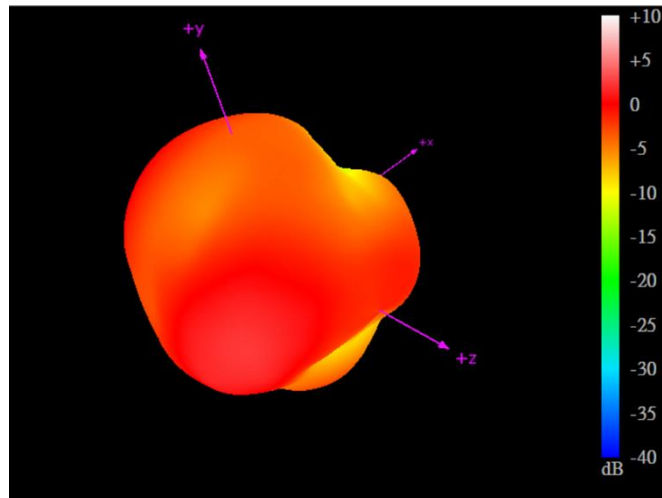

1561MHz

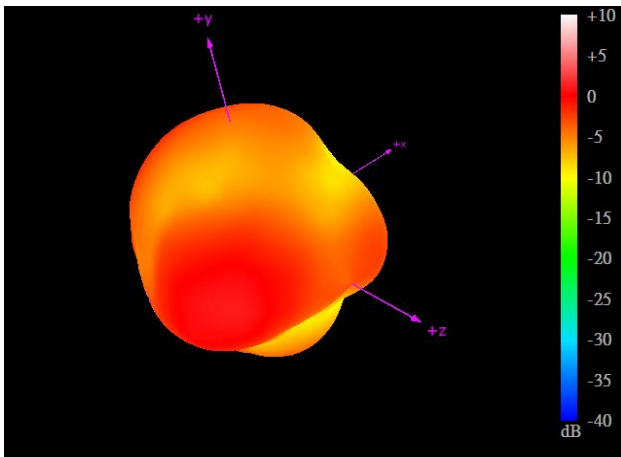


1575.42MHz

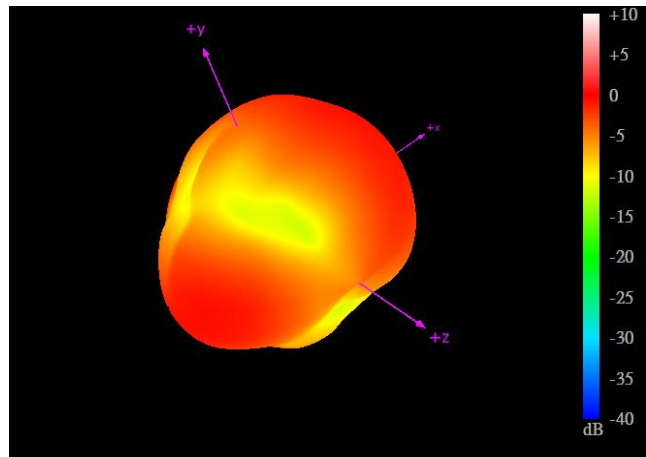


1602MHz


3.1.10. Axial Ratio (Passive antenna)

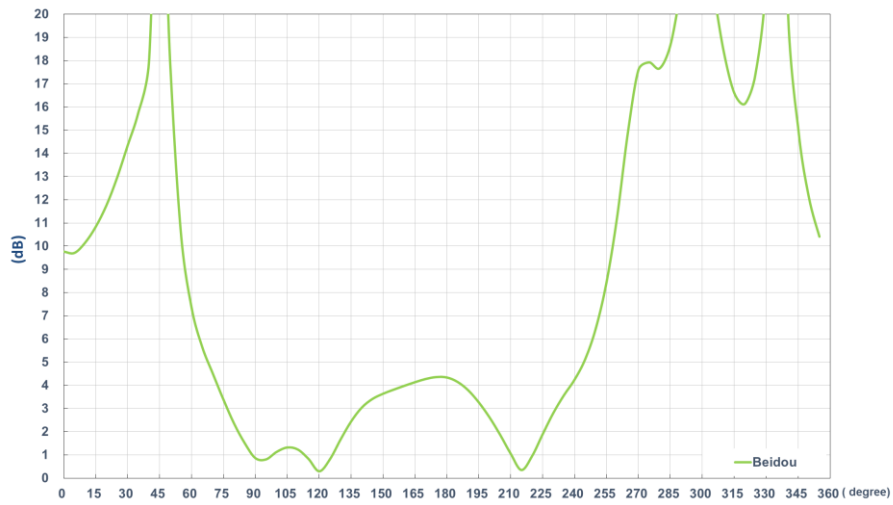

1561MHz

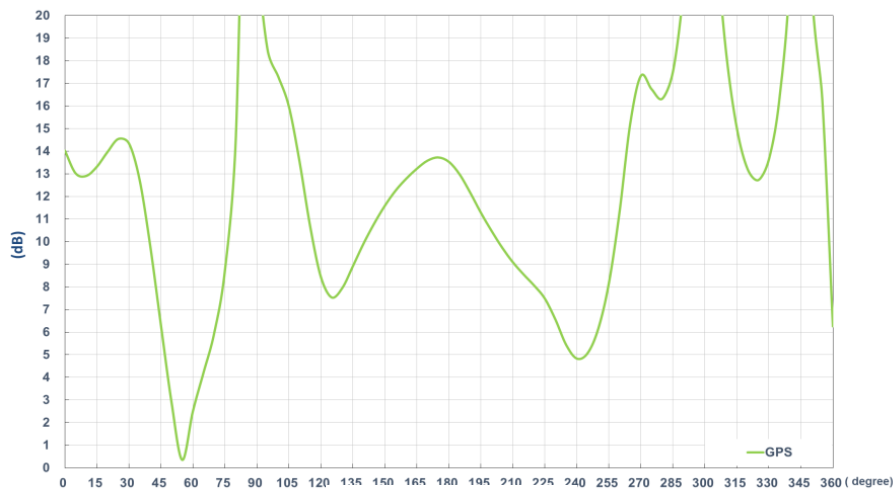


1575.42MHz

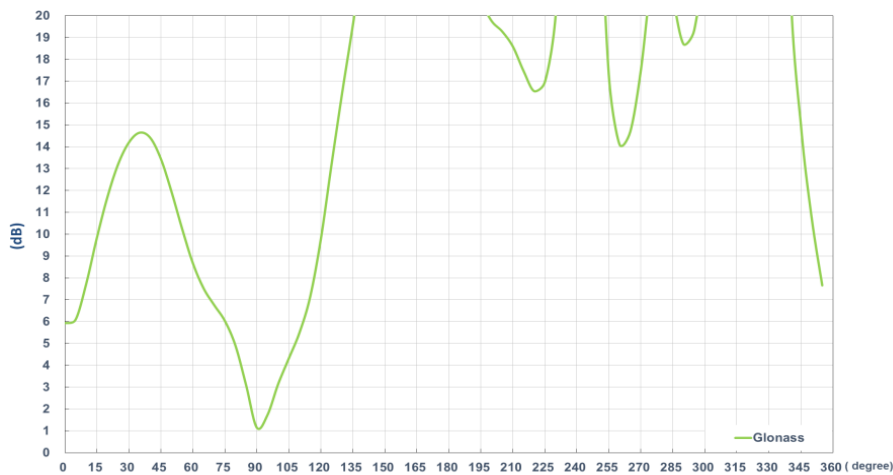


1602MHz



3.1.11. GPS-GLONASS-GALILEO-BeiDou LNA Gain and Noise Figure (Active antenna)

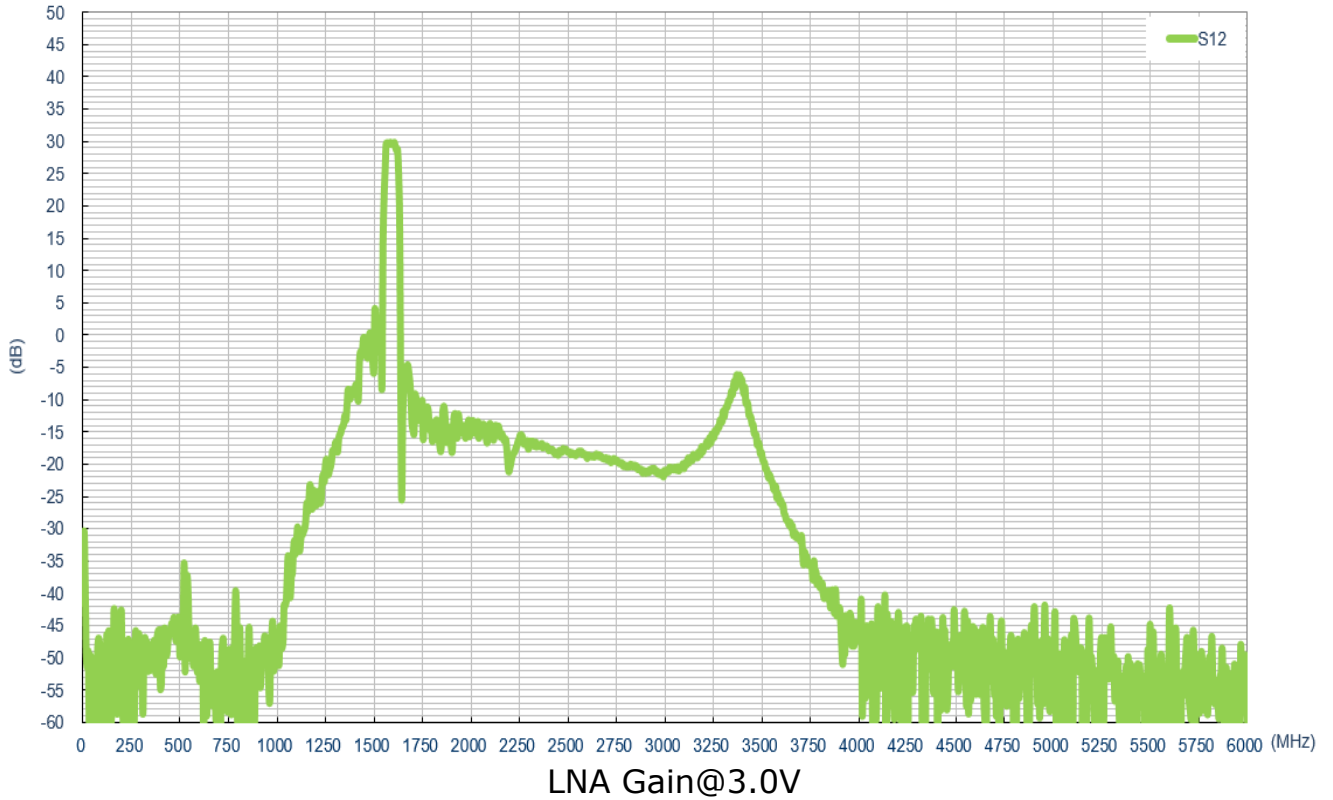


LNA Gain@3.0V

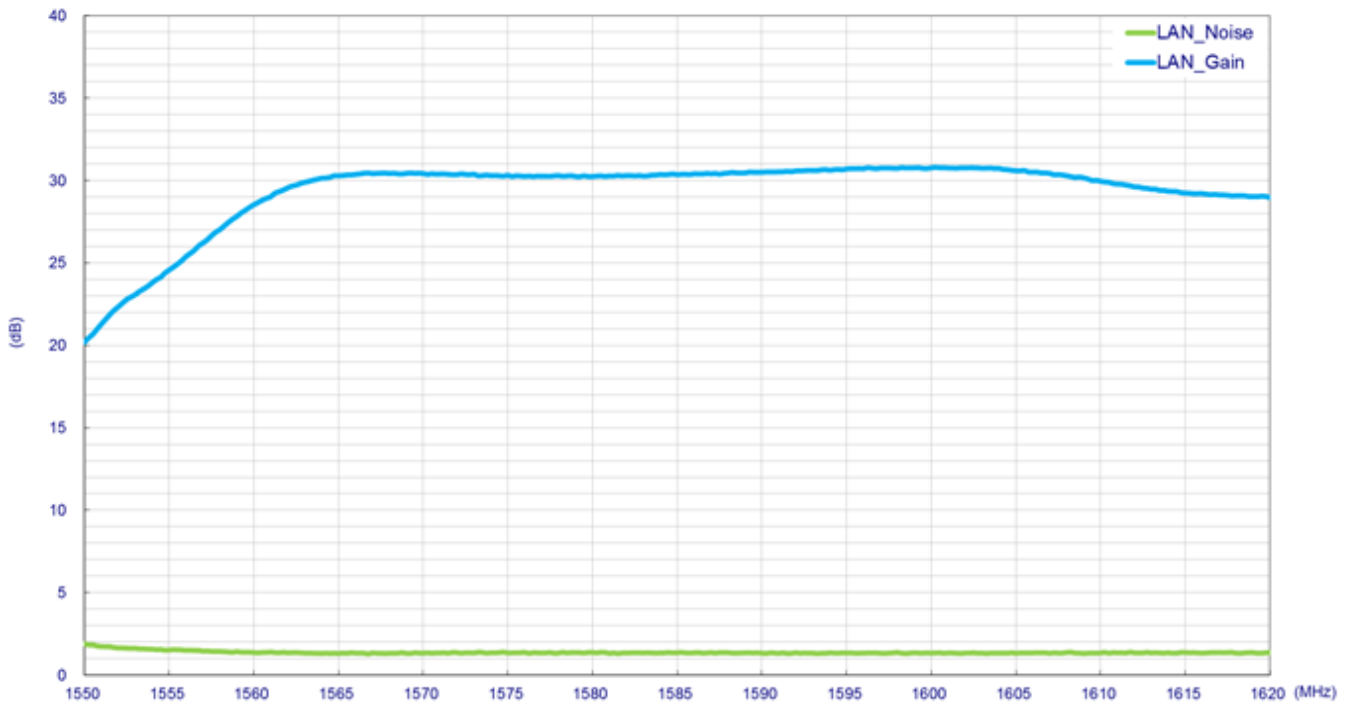


LNA Noise Figure @3.0V

3.2. LTE_MIMO/Wi-Fi_MIMO Antenna


3.2.1. Test Setup

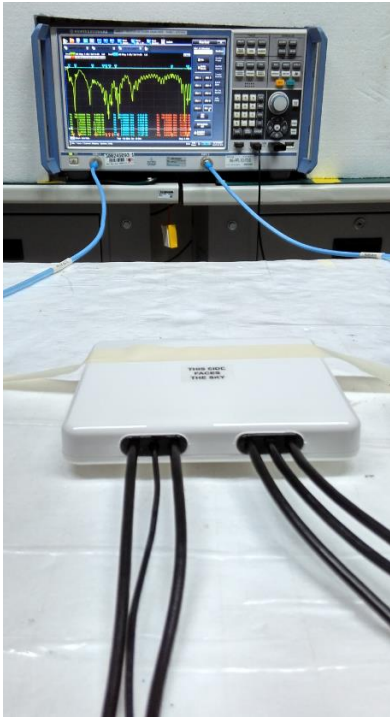


Free space

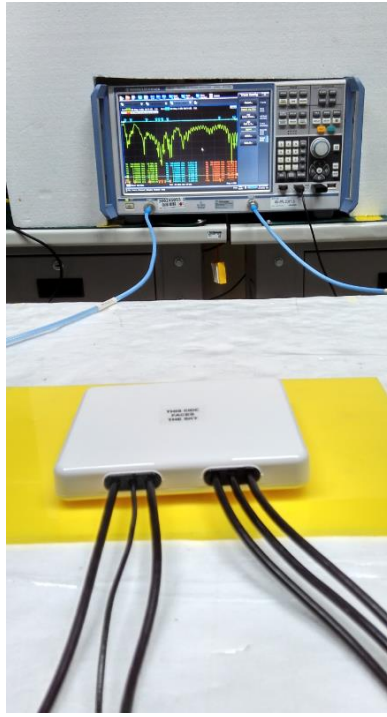


ABS

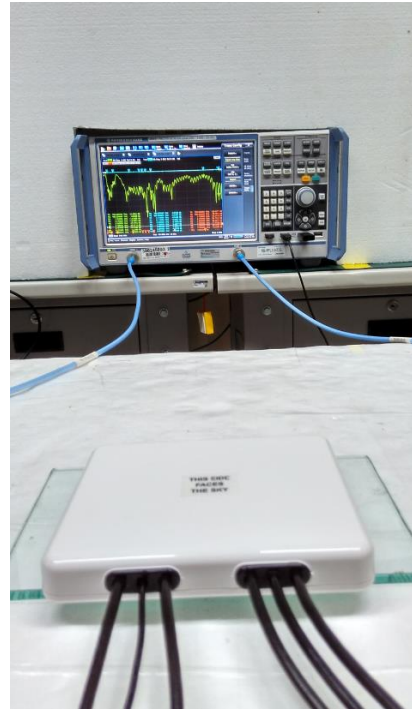

Glass

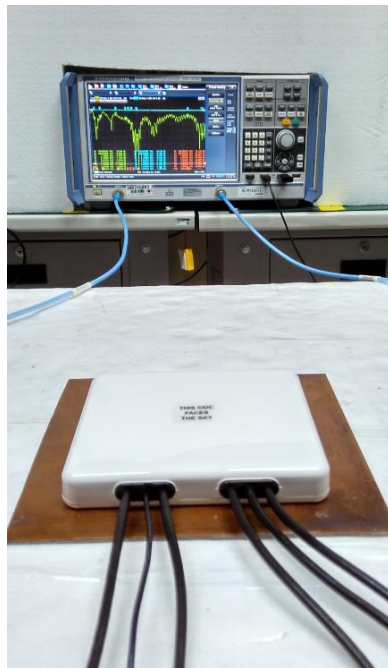


Metal

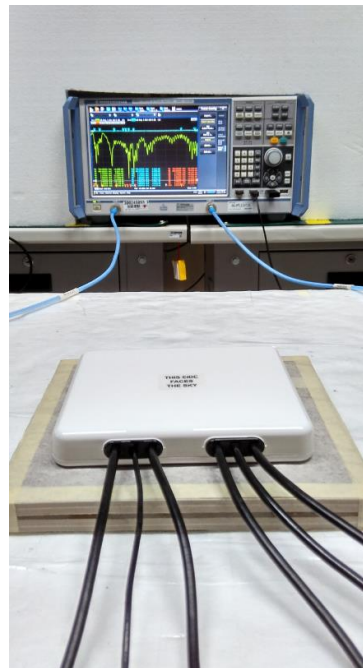

Wall


3.2.2. LTE 1 Antenna Return Loss

Performance in different environments with 1 meter cable length

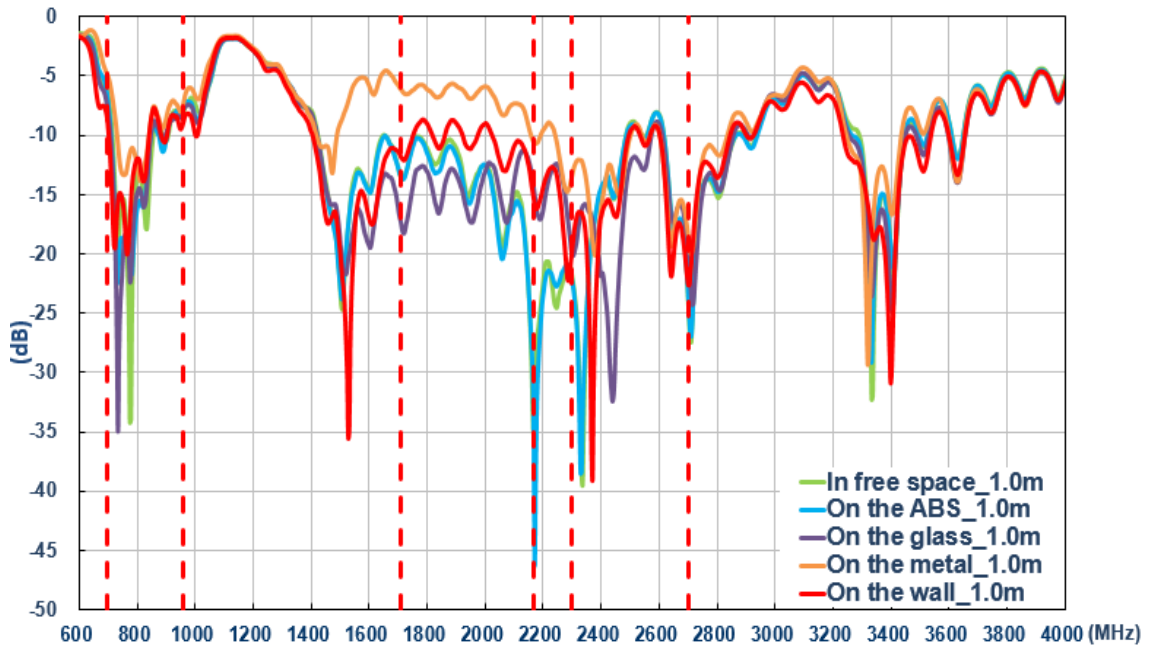


3.2.3. LTE 2 Antenna Return Loss

Performance in different environments with 1 meter cable length

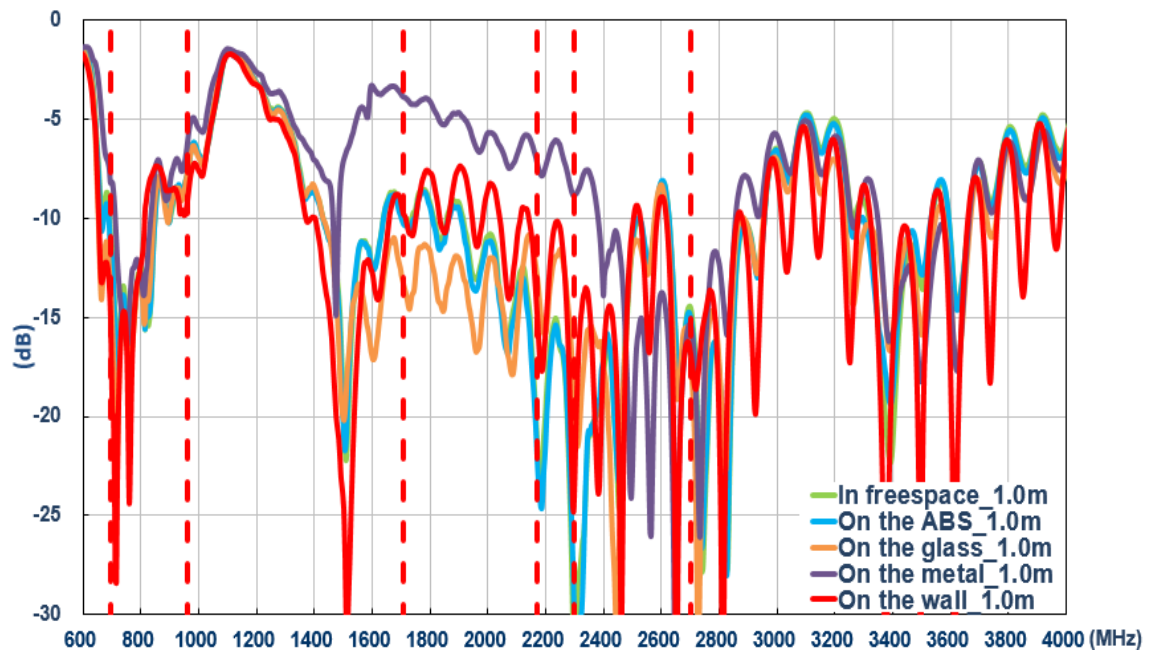


3.2.4. LTE Envelope Correlation Coefficient

Performance in different environments with 1 meter cable length

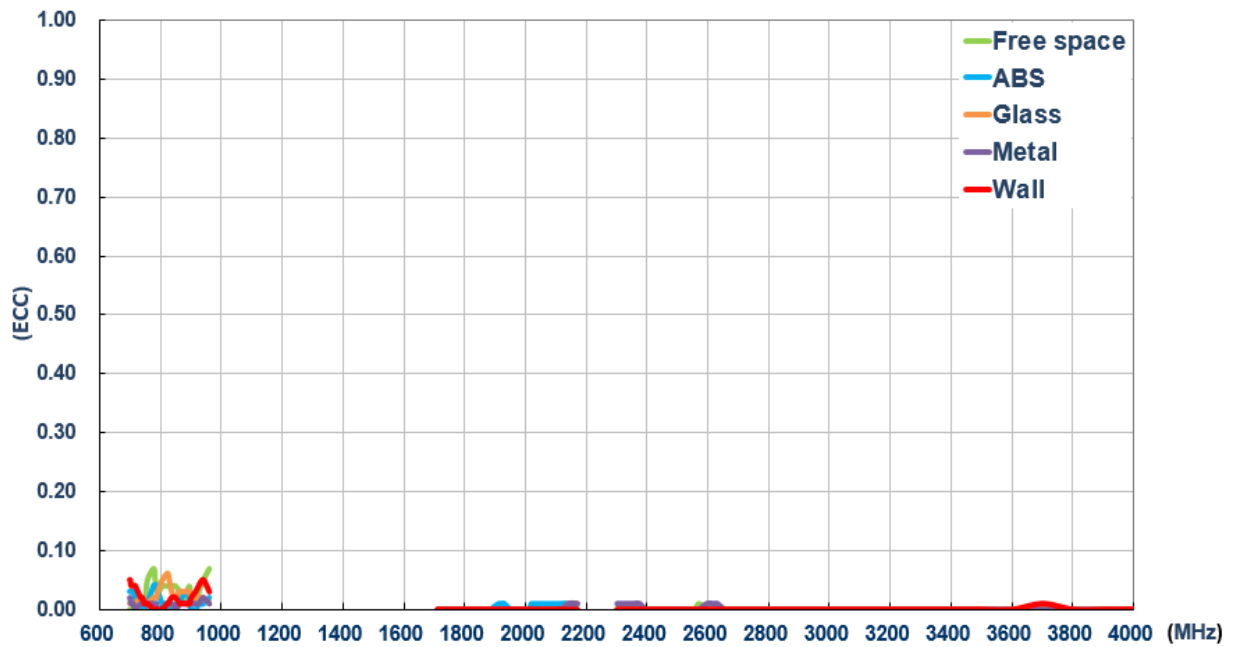


3.2.5. LTE 1 Antenna Efficiency

Performance in different environments with 1 meter cable length

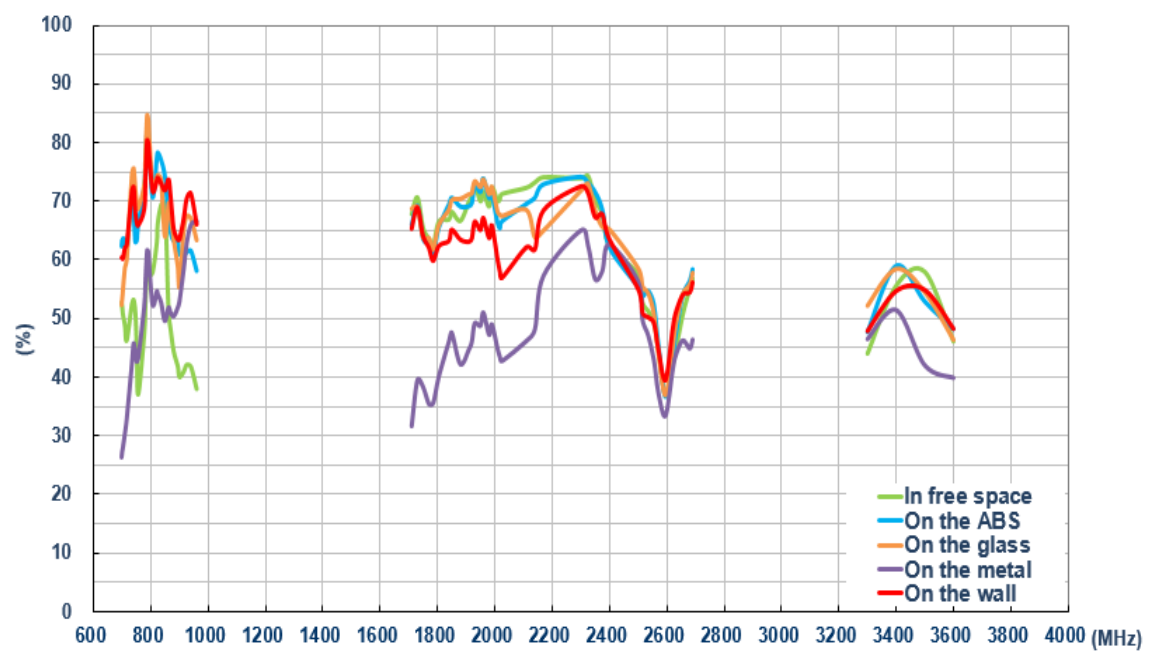


3.2.6. LTE 2 Antenna Efficiency

Performance in different environments with 1 meter cable length

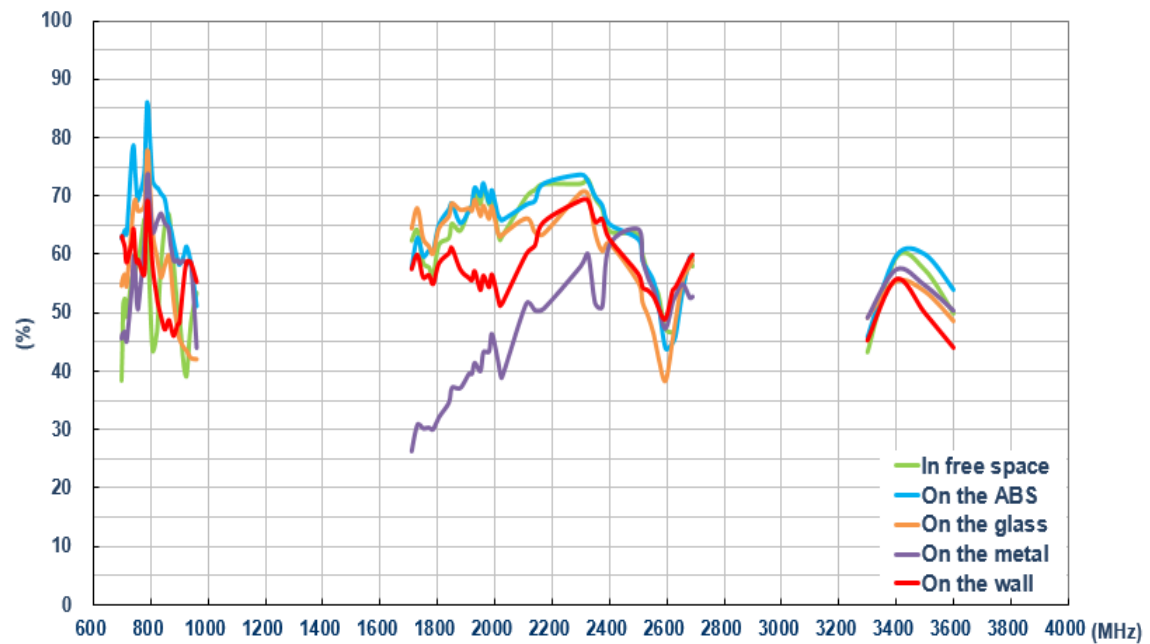


3.2.7. LTE 1 Antenna Average Gain

Performance in different environments with 1 meter cable length

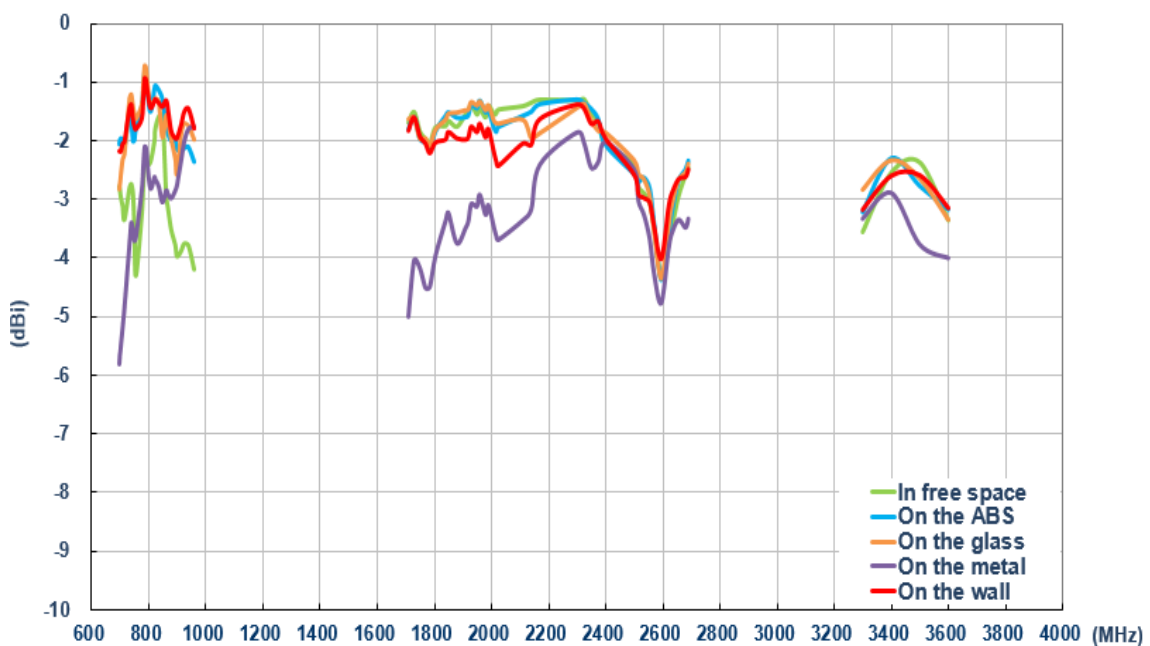


3.2.8. LTE 2 Antenna Average Gain

Performance in different environments with 1 meter cable length

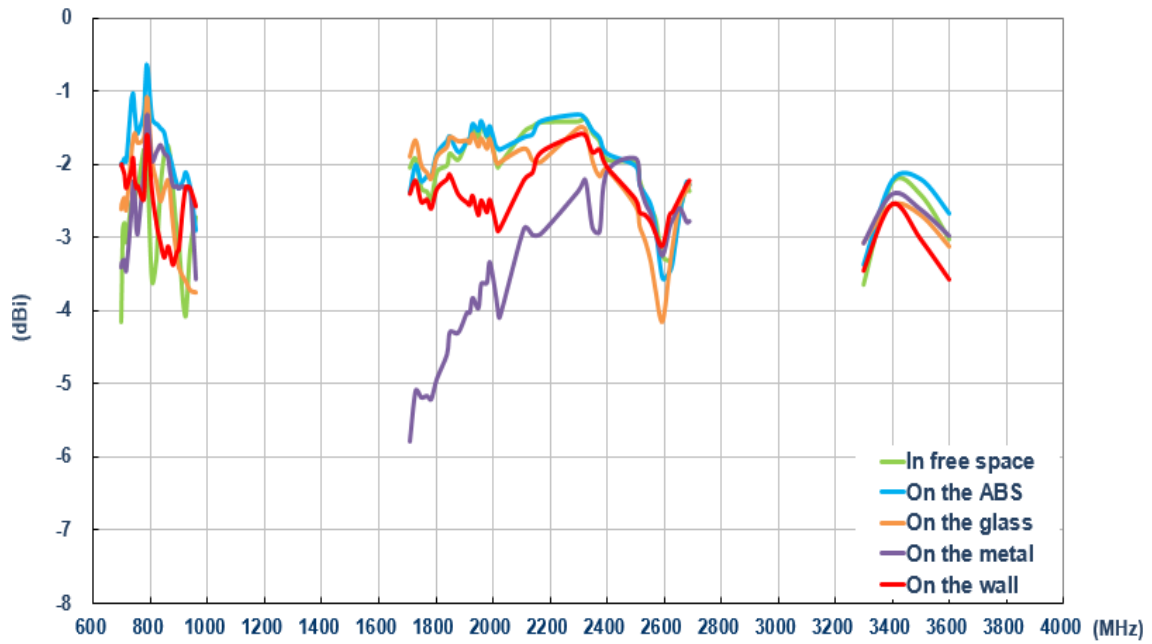


3.2.9. LTE 1 Antenna Peak Gain

Performance in different environments with 1 meter cable length

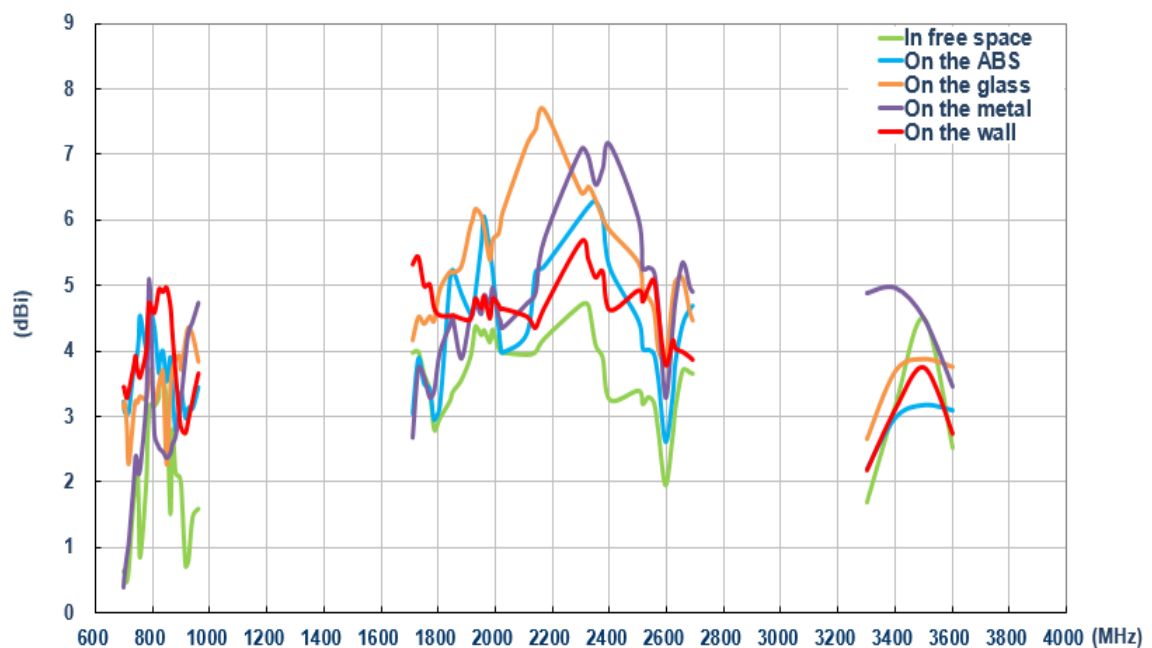


3.2.10. LTE_2 Antenna Peak Gain


Performance in different environments with 1 meter cable length

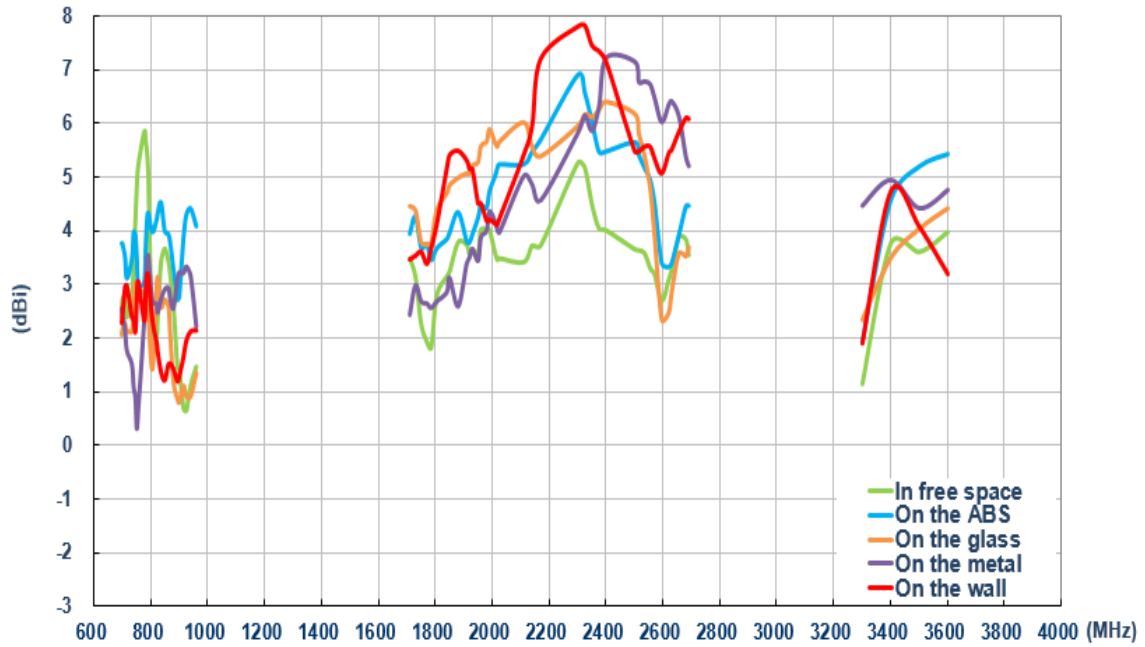


3.2.11. Wi-Fi Antenna Return Loss

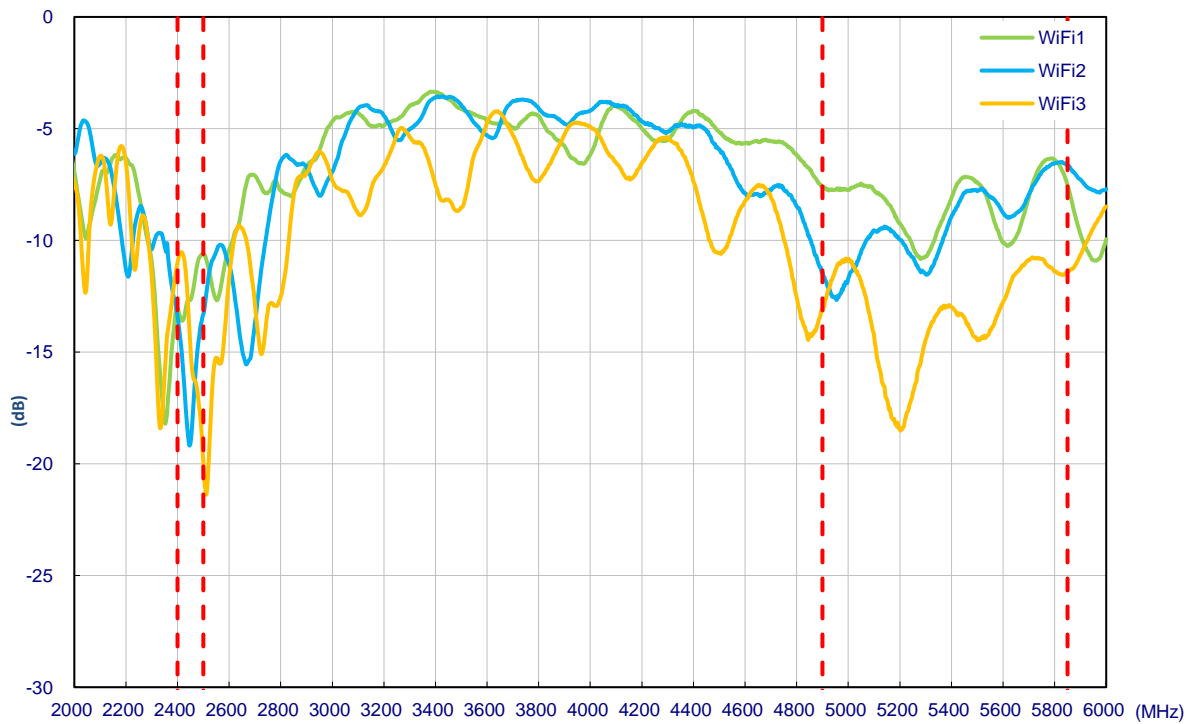


3.2.12. Wi-Fi Isolation

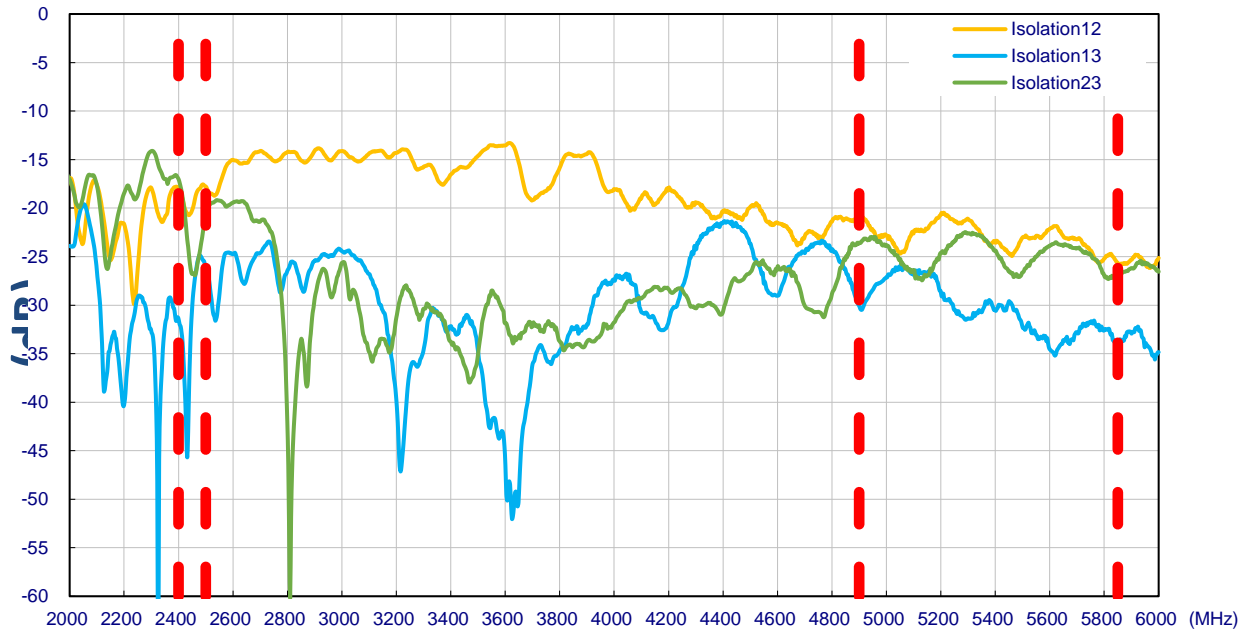


3.2.13. Wi-Fi Antenna Efficiency

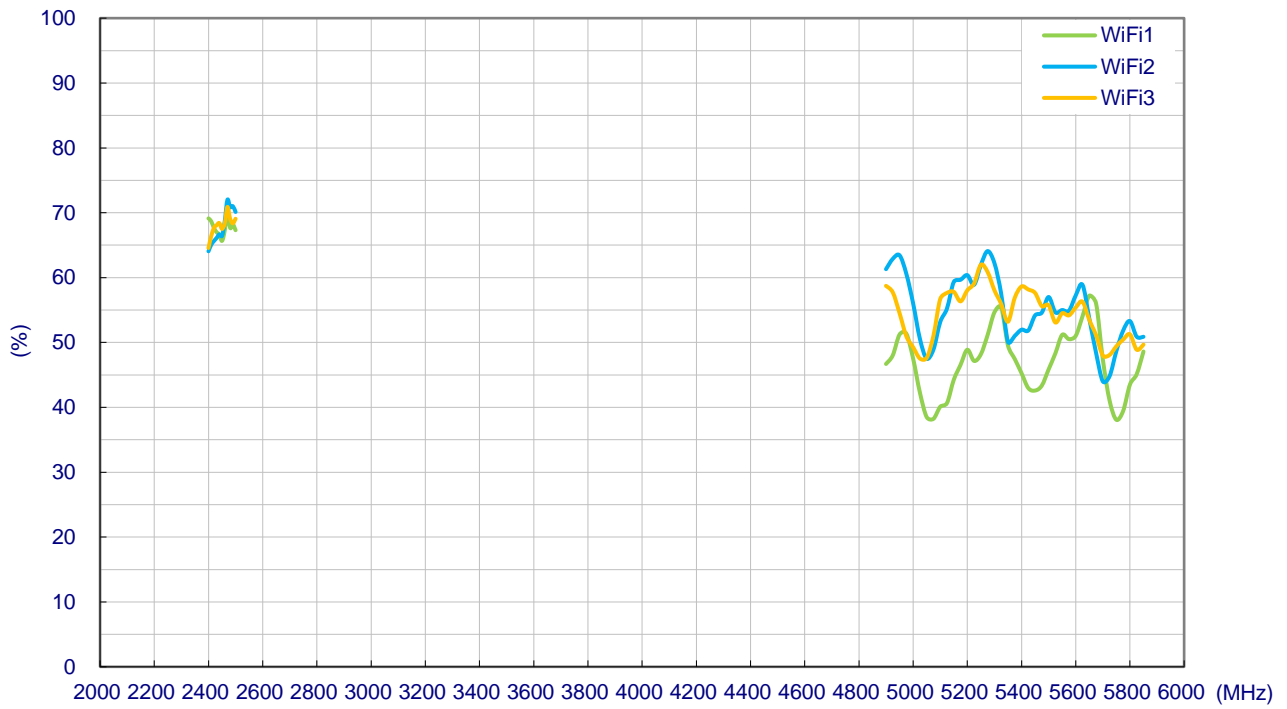


3.2.14. Wi-Fi Antenna Average Gain

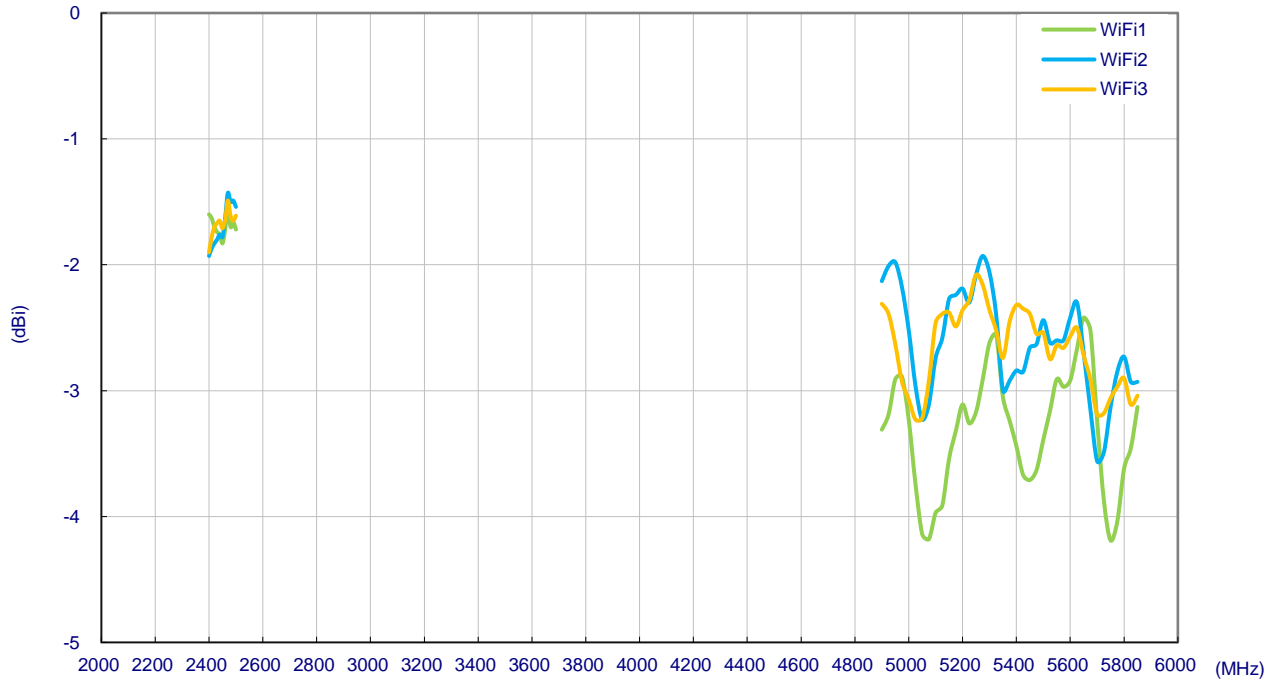

3.2.15. Wi-Fi Antenna Peak Gain

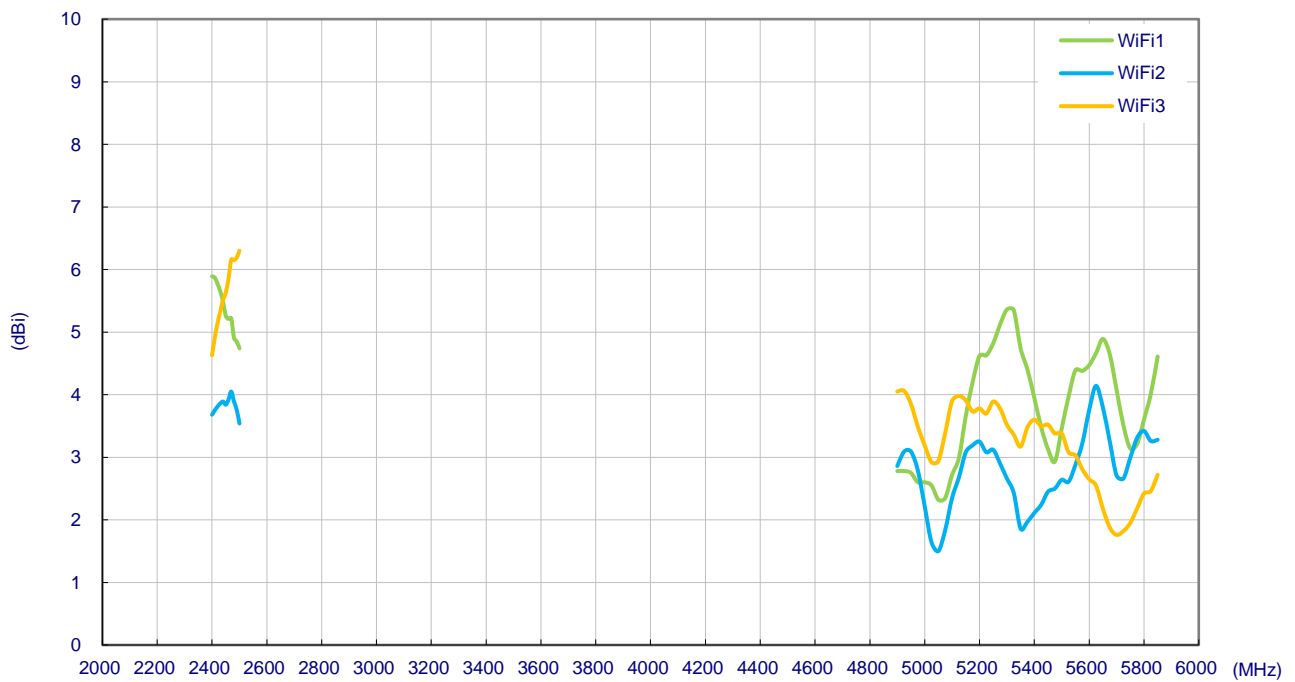





3.2.16. Test Setup for Antenna Radiation Pattern

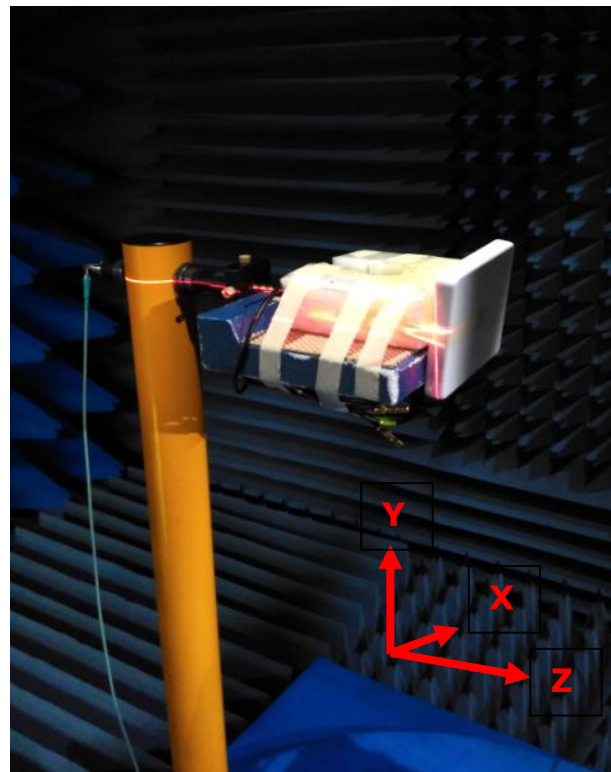

In free space





3.2.17. 2D Radiation Pattern (LTE_MIMO1 with 1M cable length in free space)

XY Plane

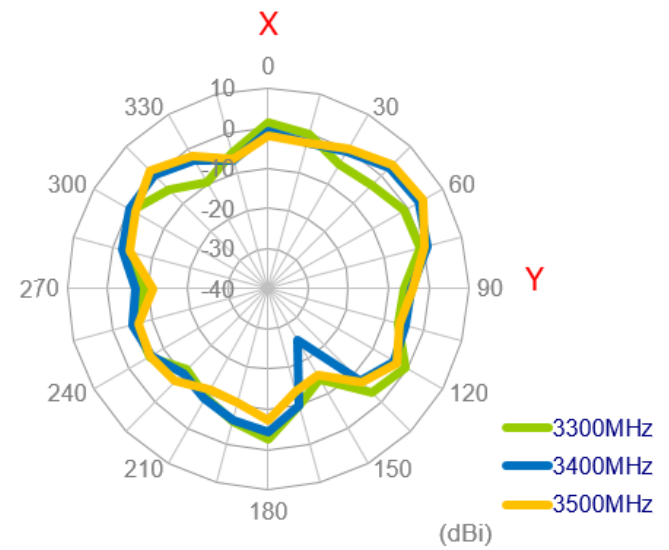
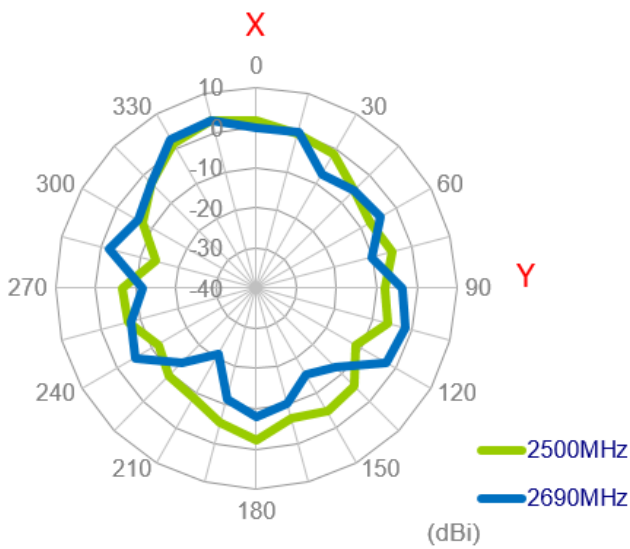
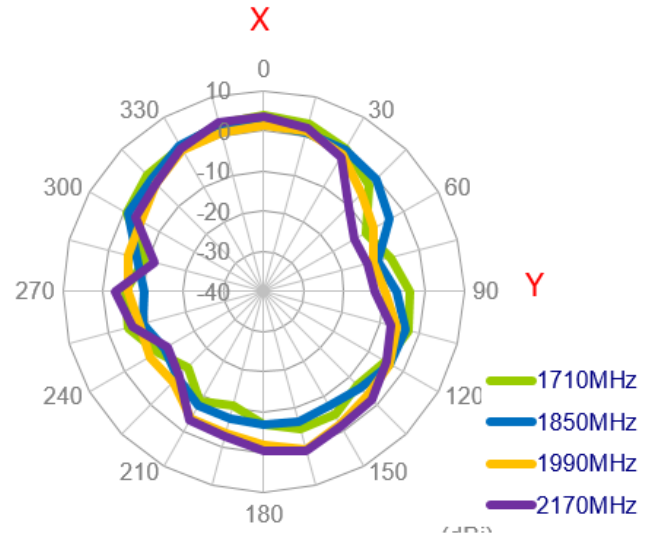
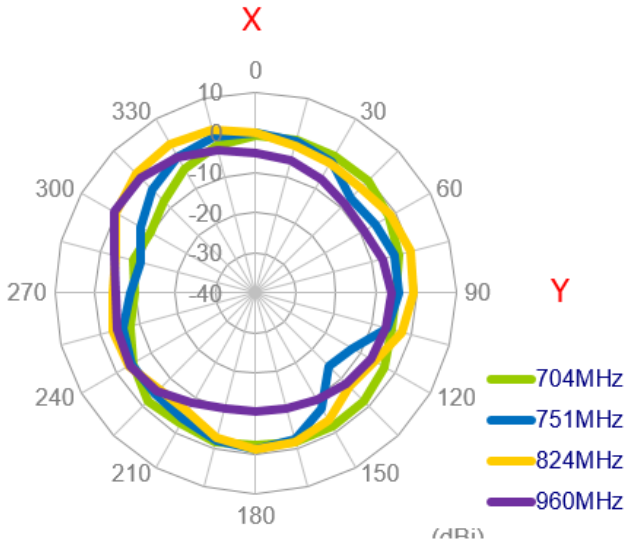





XZ Plane

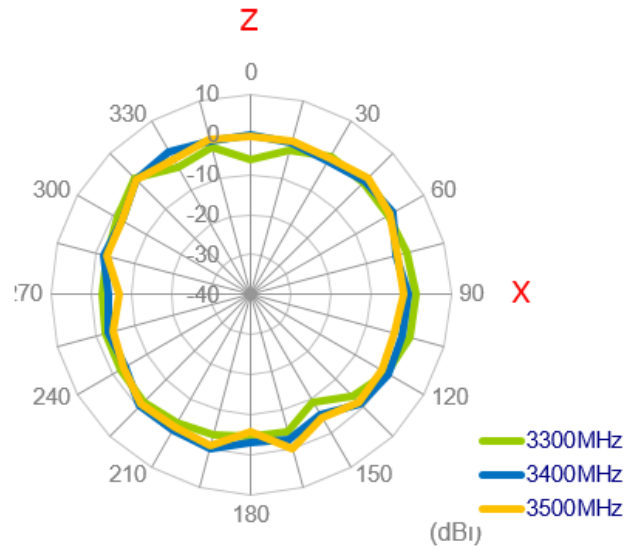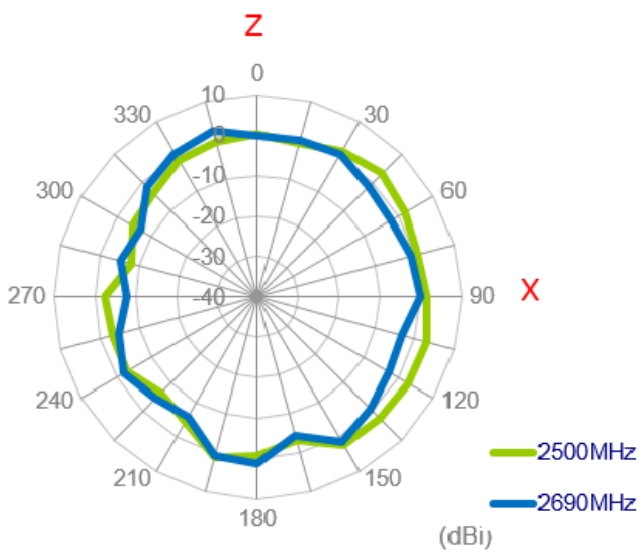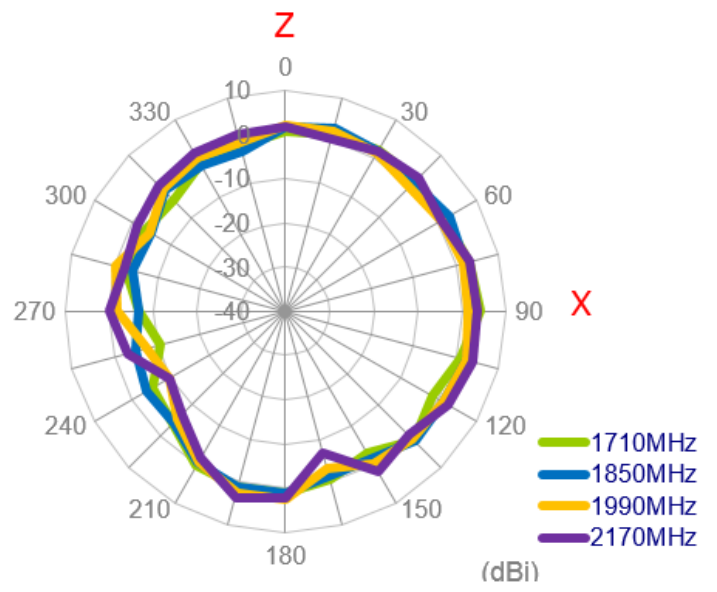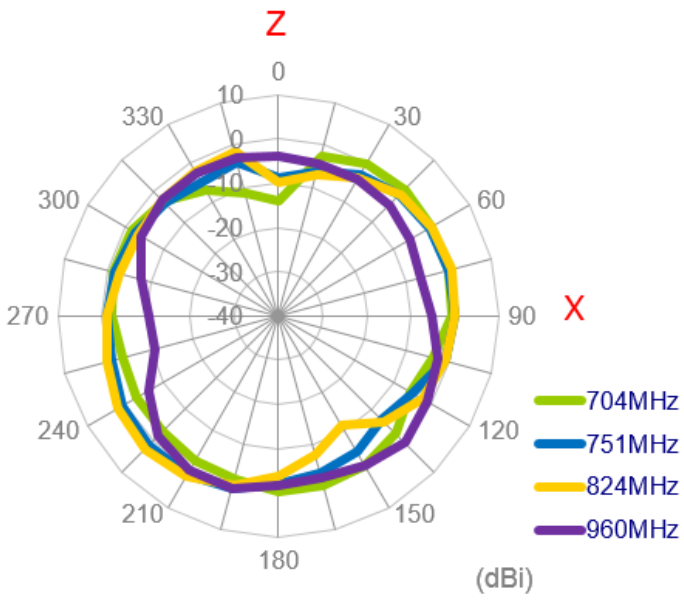


YZ Plane

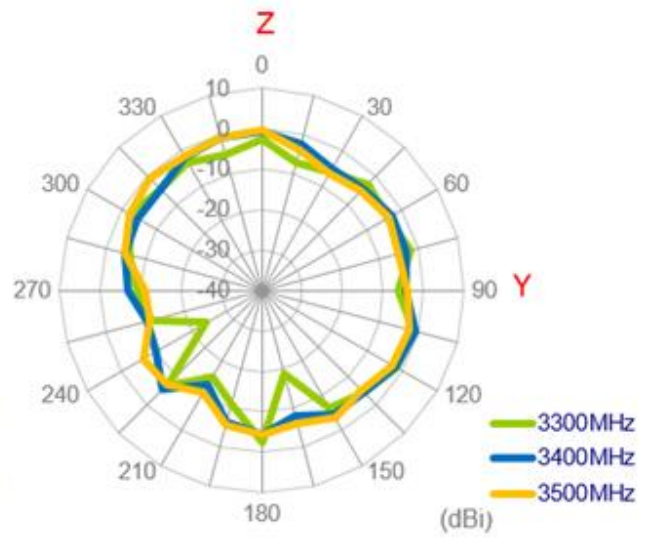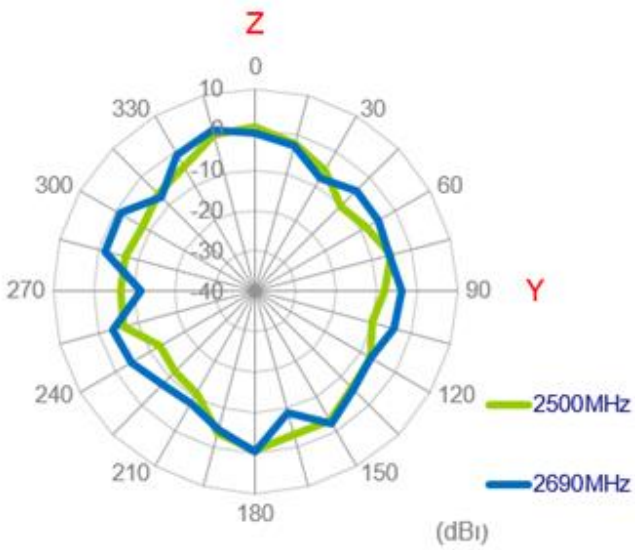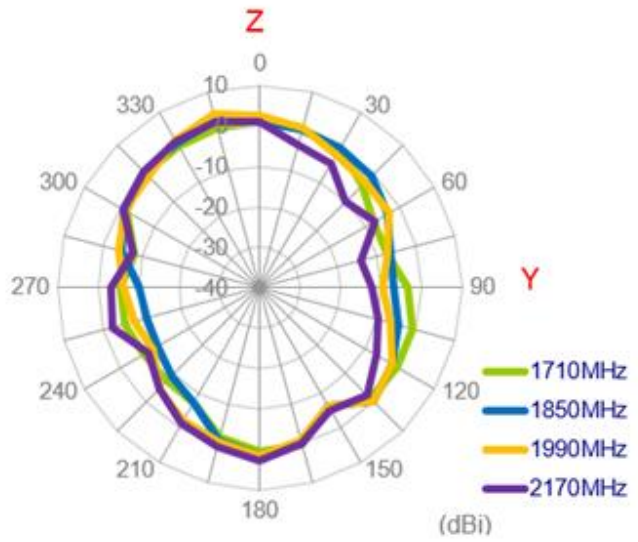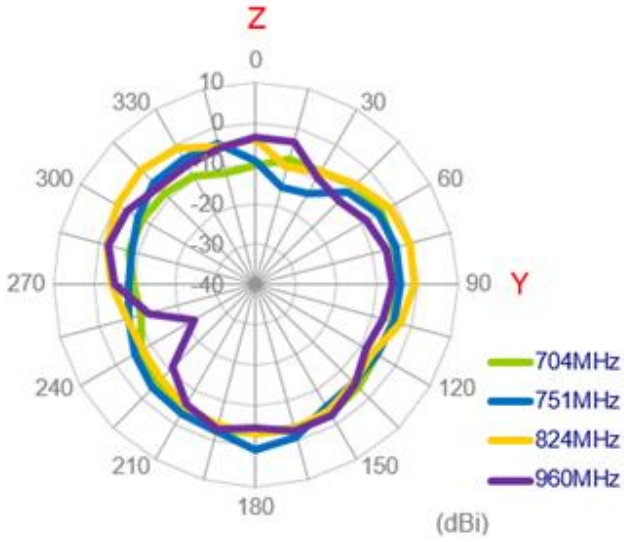


3.2.18. 3D Radiation Pattern (LTE_MIMO1 with 1M cable length in free space)

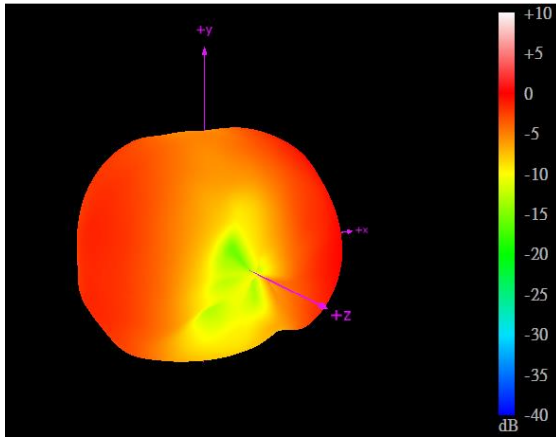


704MHz

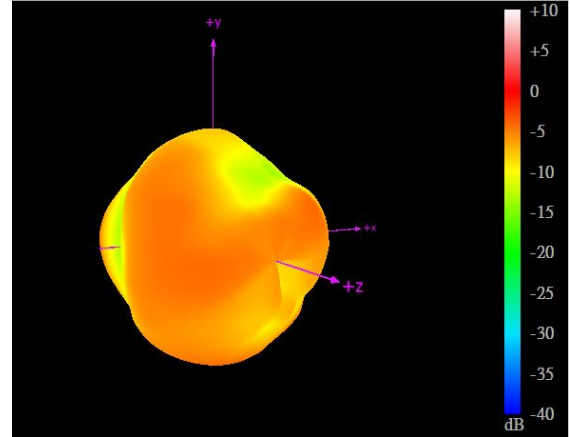


960MHz

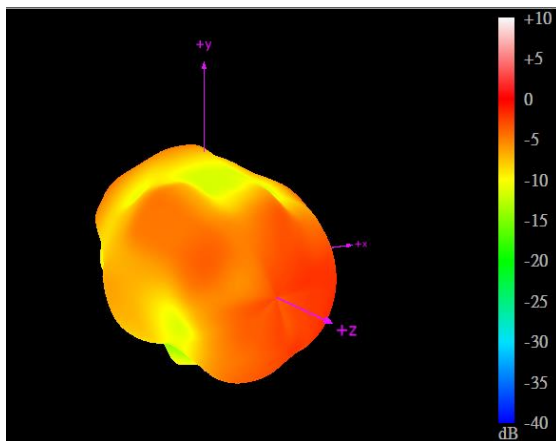


1710MHz

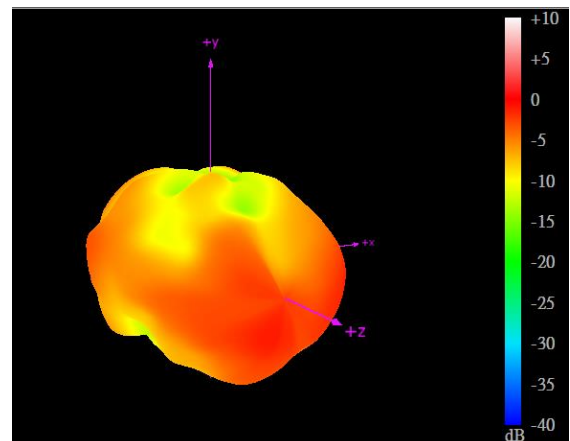

2170MHz

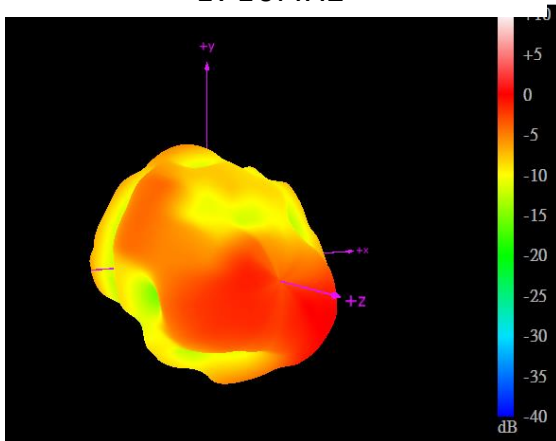





2690MHz

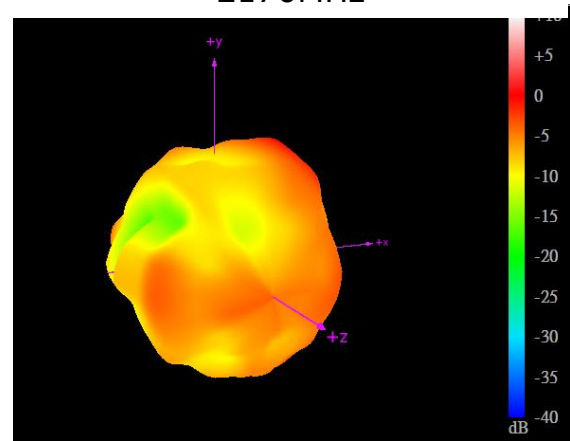

3500MHz





3.2.19. 2D Radiation Pattern (LTE_MIMO2 with 1M cable length in free space)

XY Plane

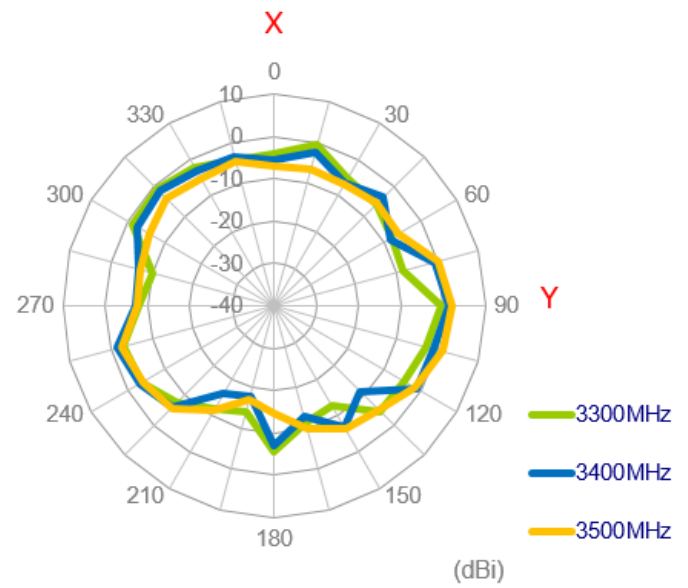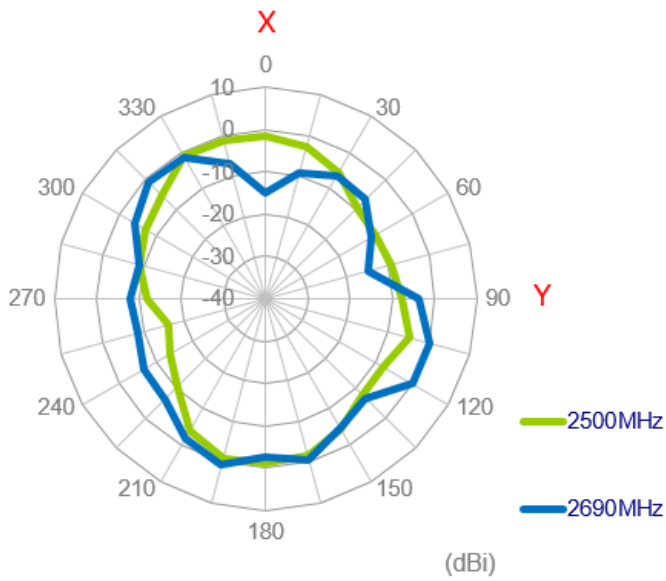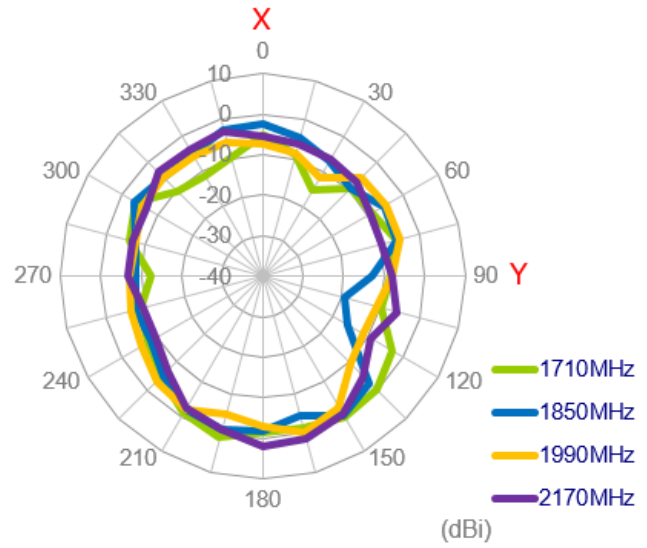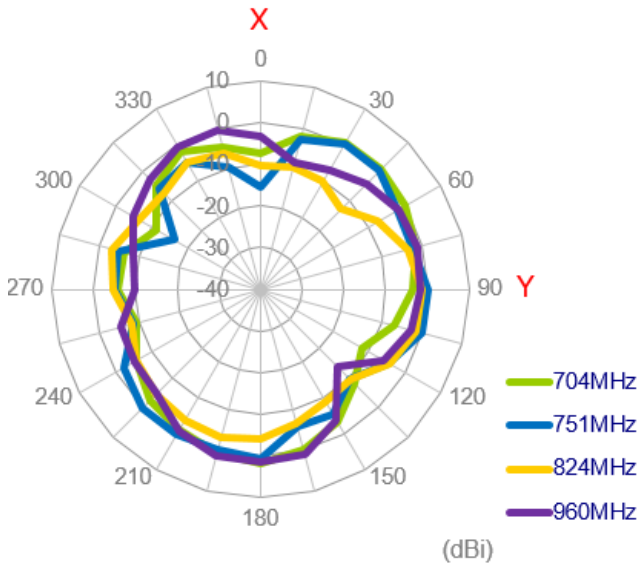







XZ Plane

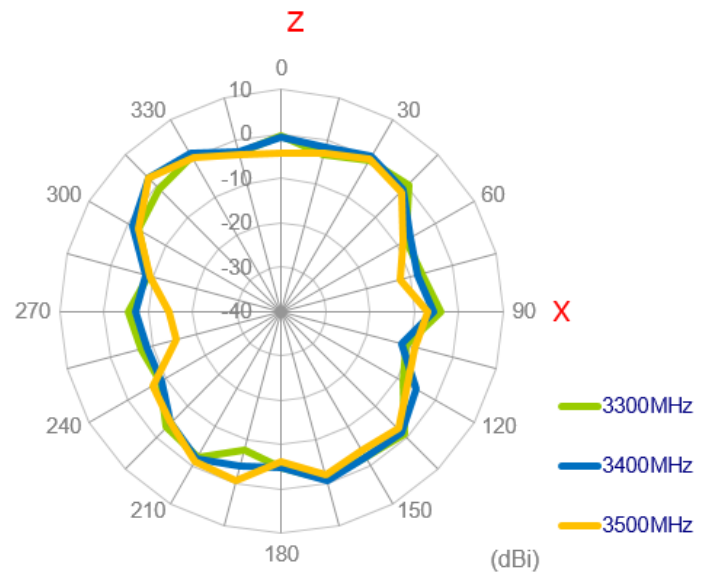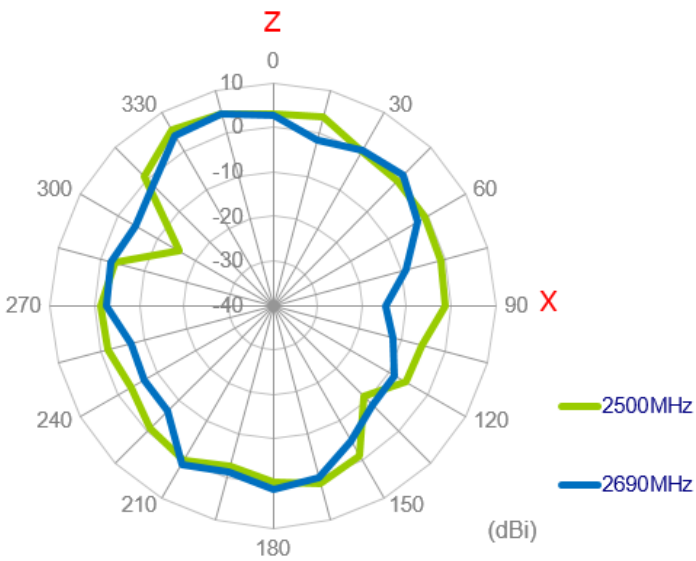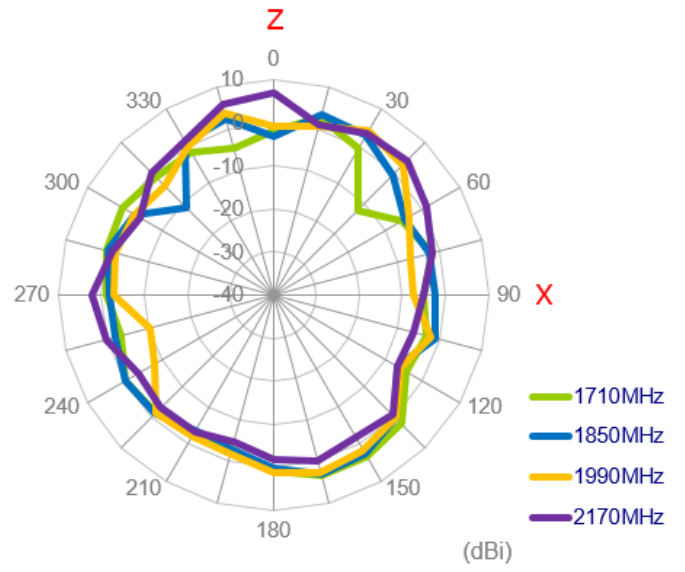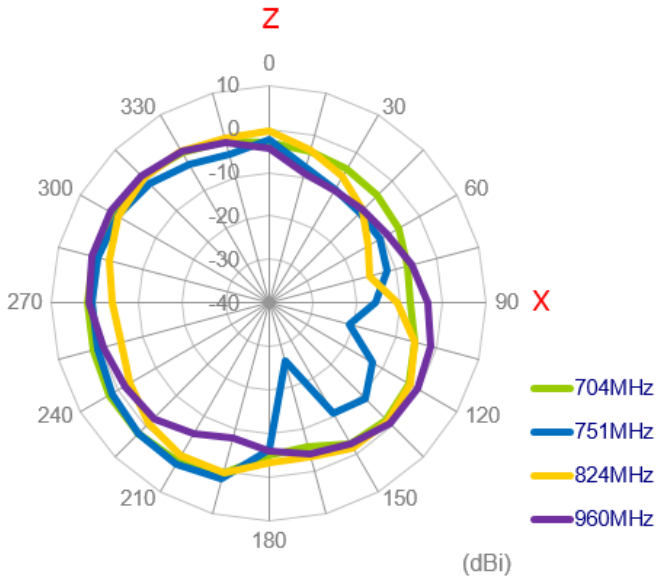





YZ Plane

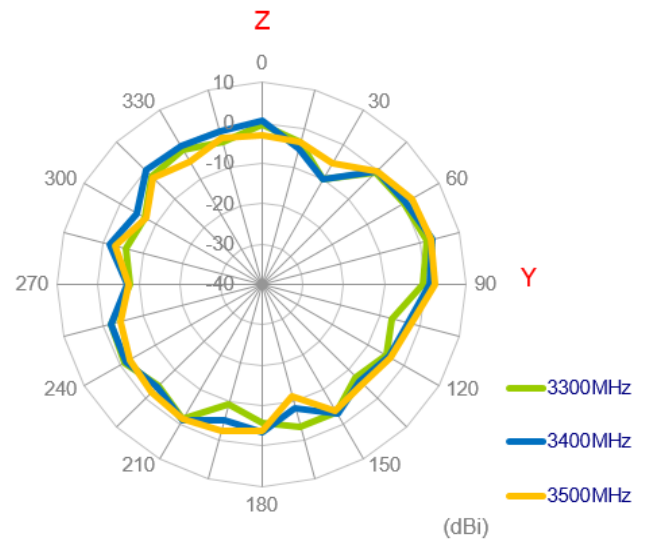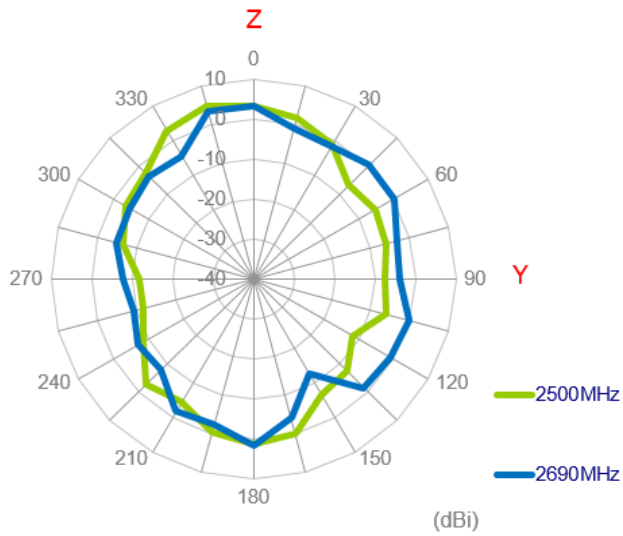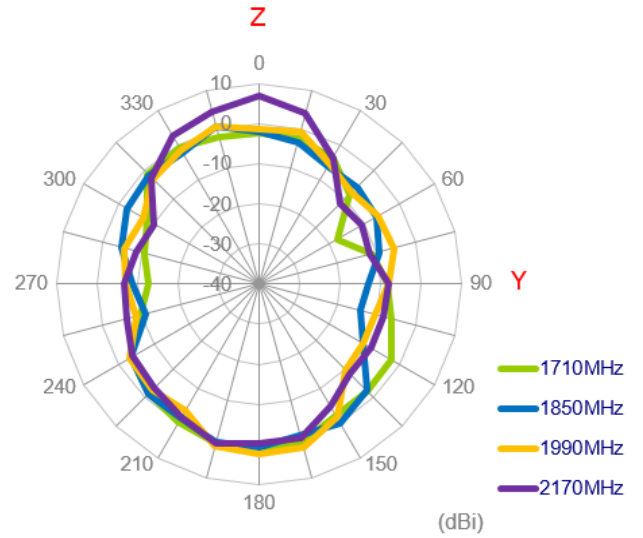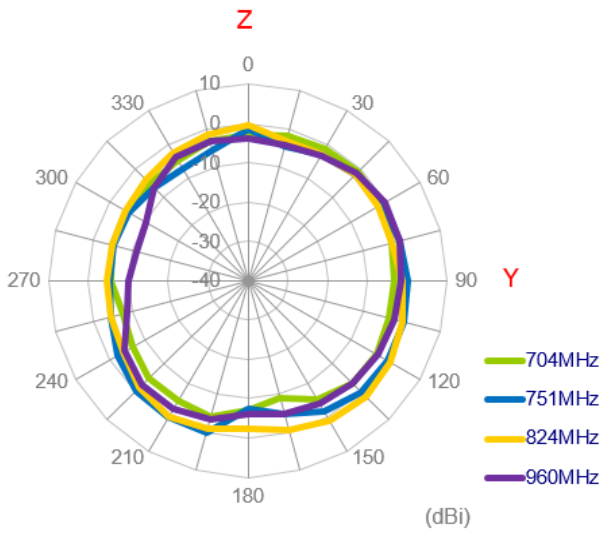


3.2.20. 3D Radiation Pattern (LTE_MIMO2 with 1M cable length in free space)

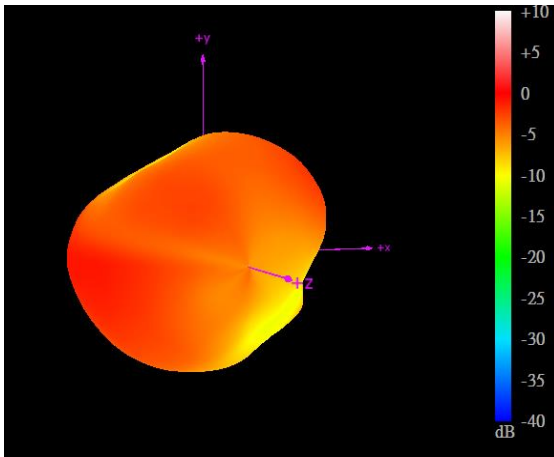


704MHz

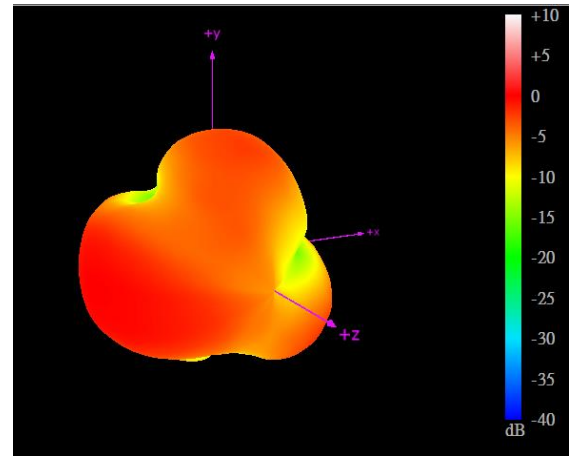


960MHz

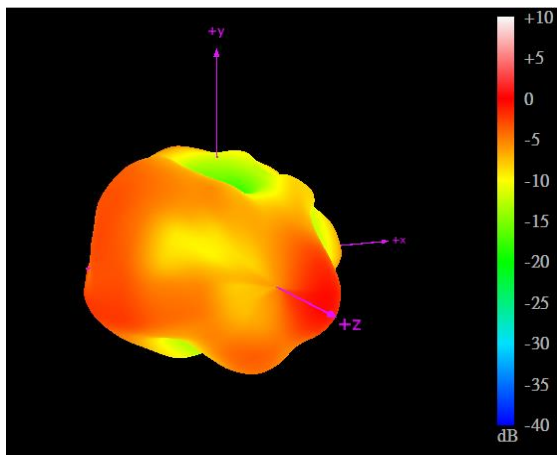


1710MHz

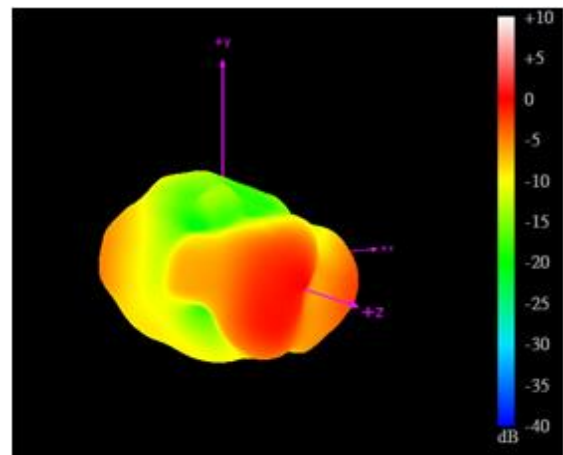

2170MHz

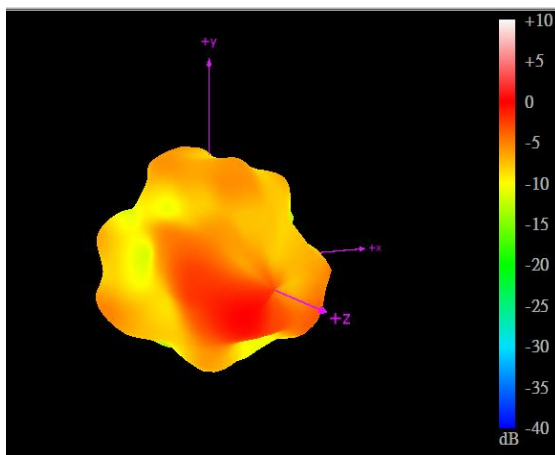



2690MHz

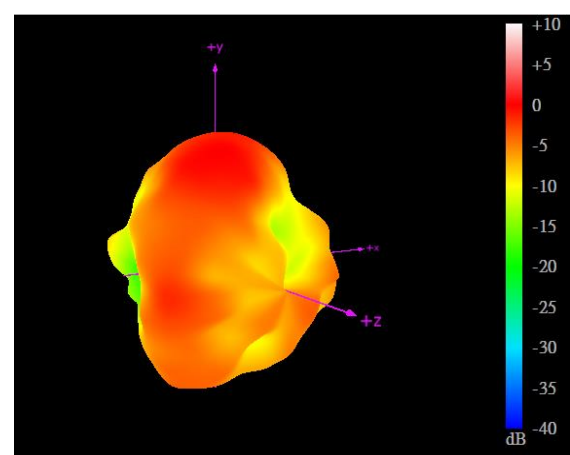



3500MHz

3.2.21. 2D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length in free space)



XY Plane

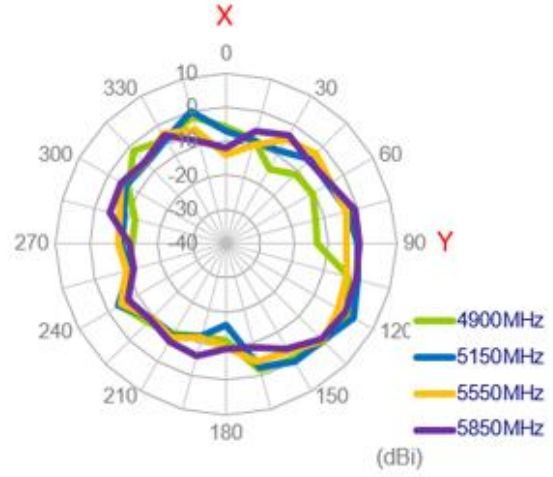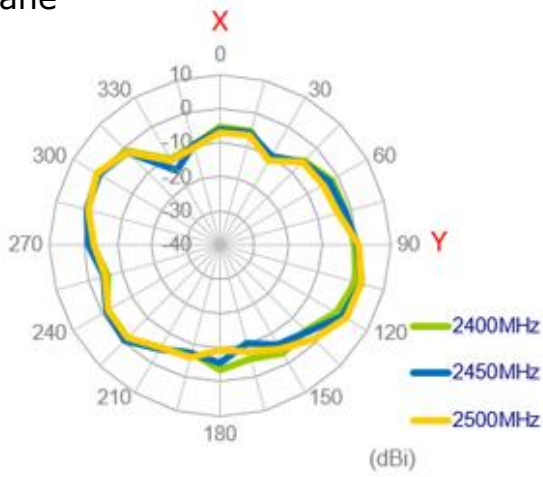


XZ Plane

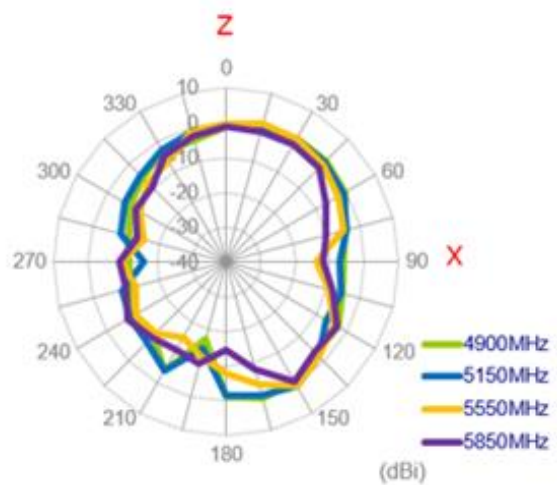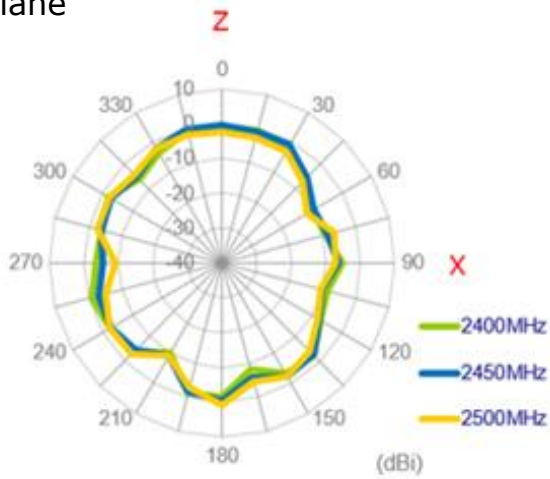


YZ Plane

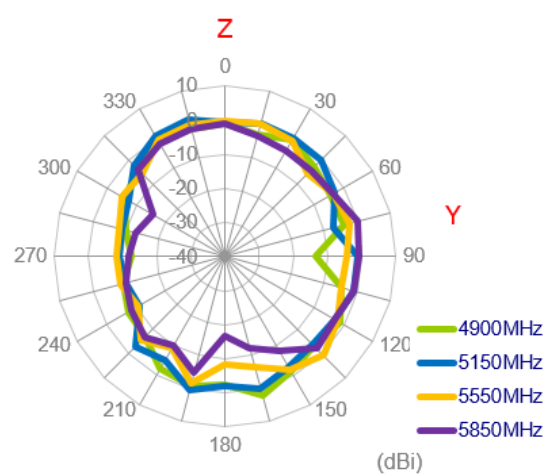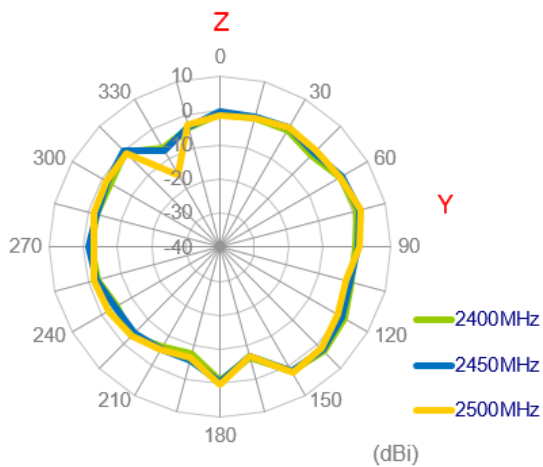

3.2.22. 3D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length in free space)

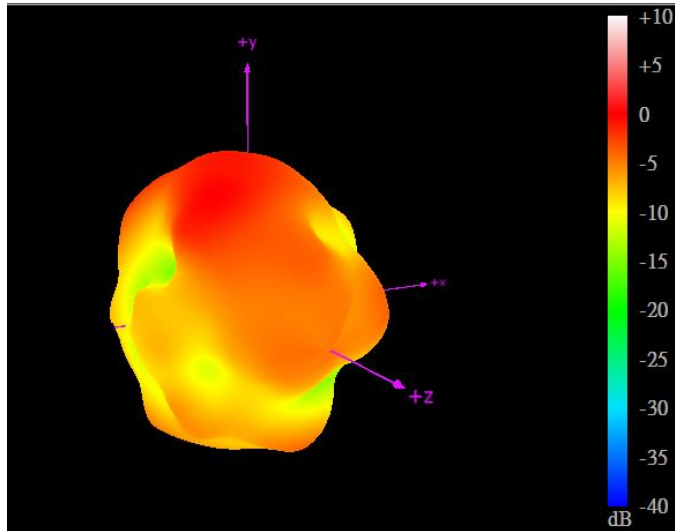

2450MHz


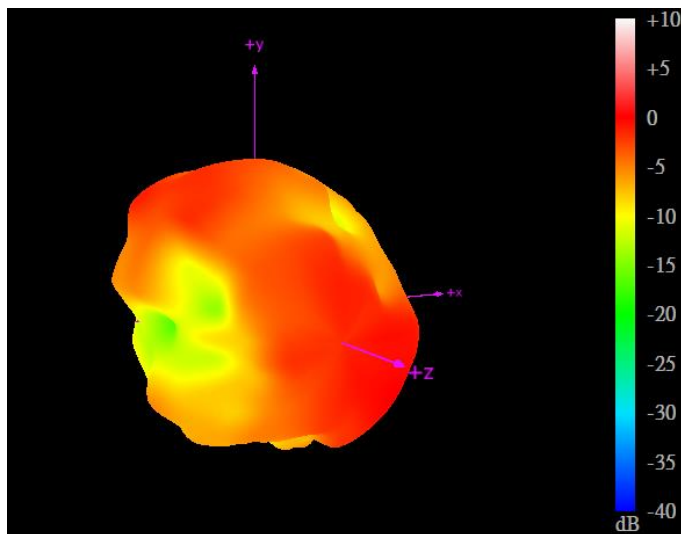


5550MHz





3.2.23. 2D Radiation Pattern (Wi-Fi_MIMO2 with 3M cable length in free space)



XY Plane

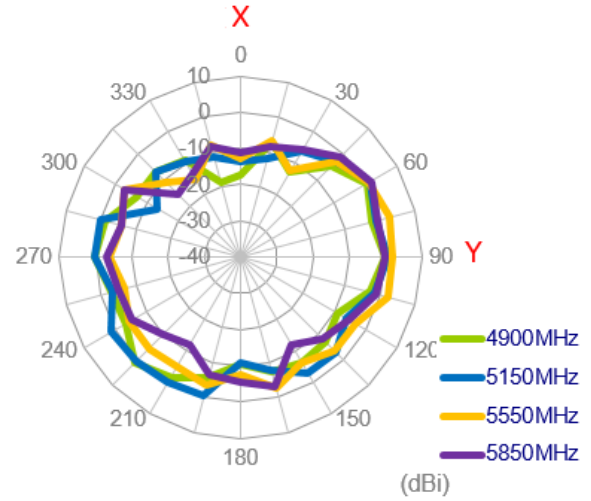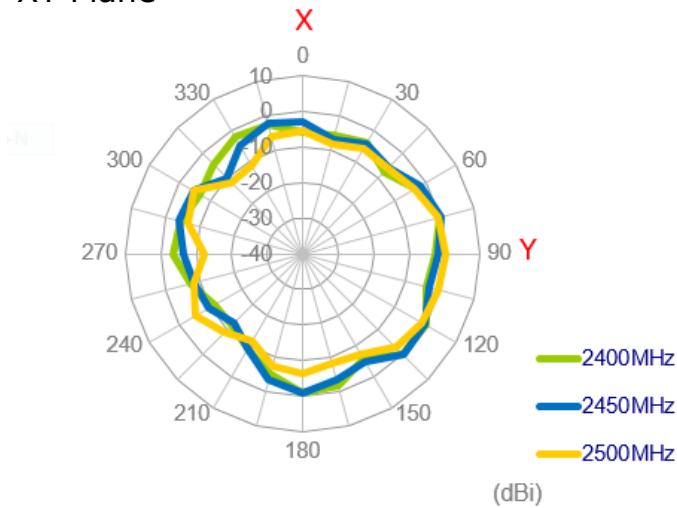


XZ Plane

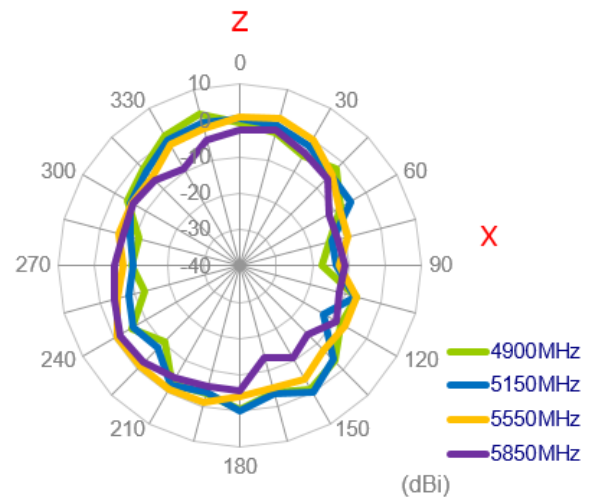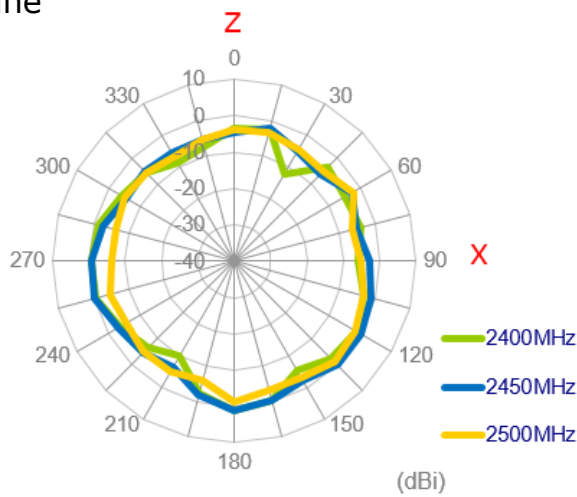


YZ Plane

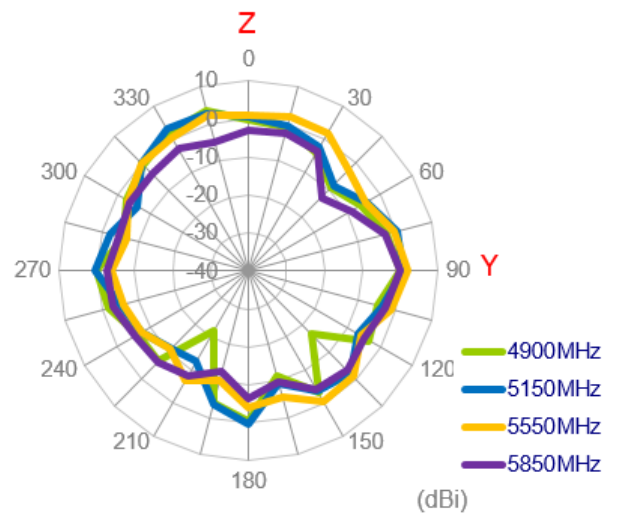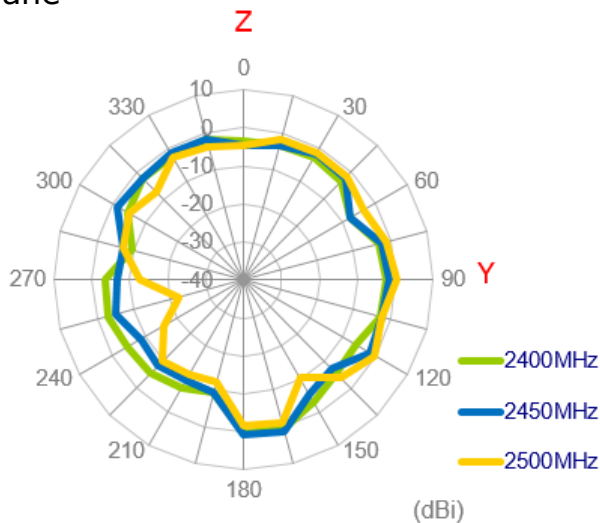

3.2.24. 3D Radiation Pattern (Wi-Fi_MIMO2 with 1M cable length in free space)

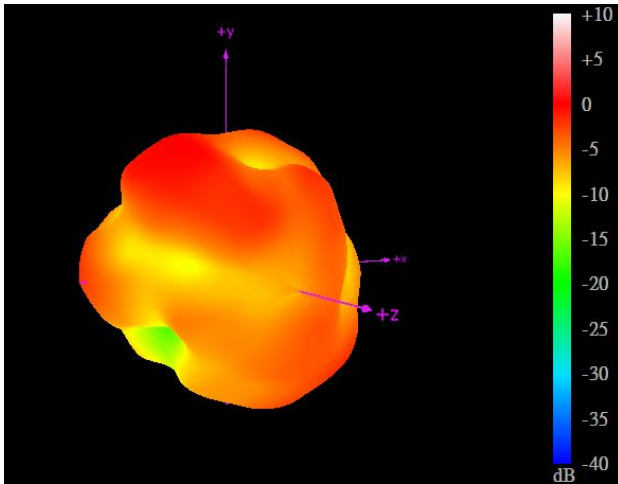

2450MHz

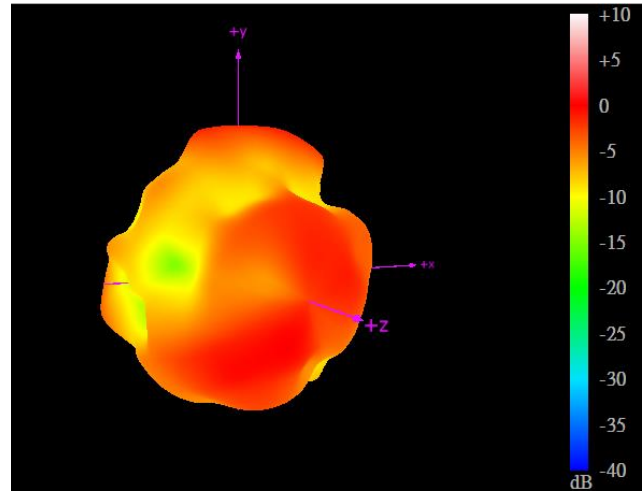

5550MHz

3.2.25. Test Setup for Antenna Radiation Pattern







On the ABS







3.2.26. 2D Radiation Pattern (LTE_MIMO1 with 1M cable length on ABS)

XY Plane

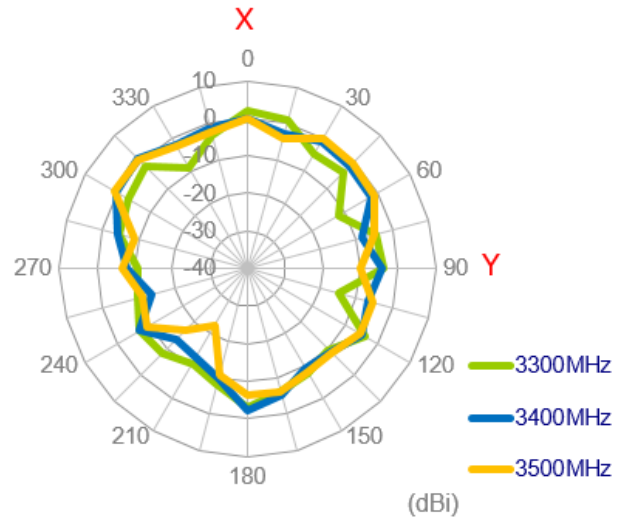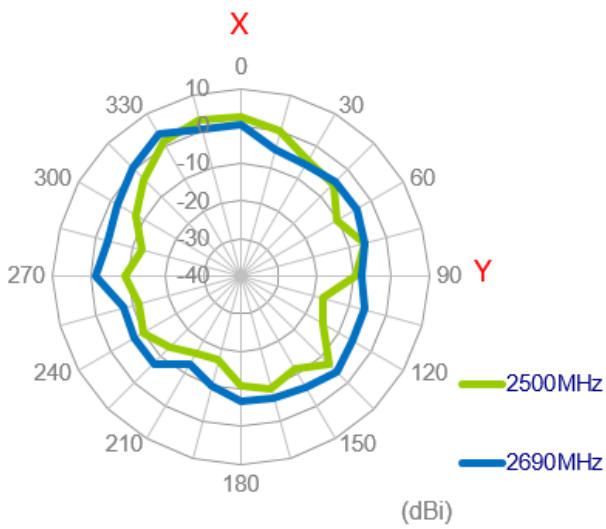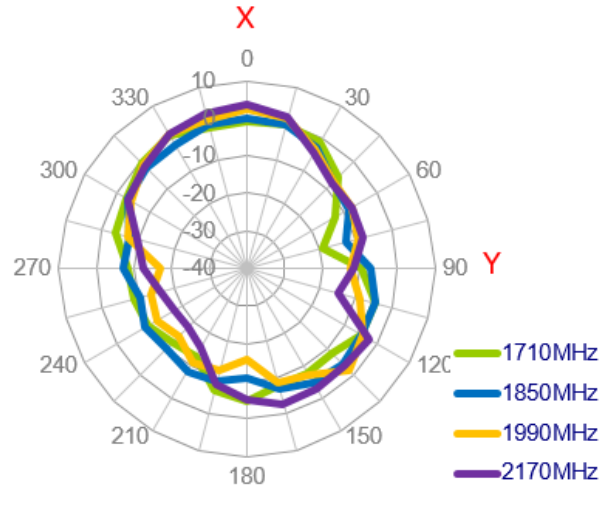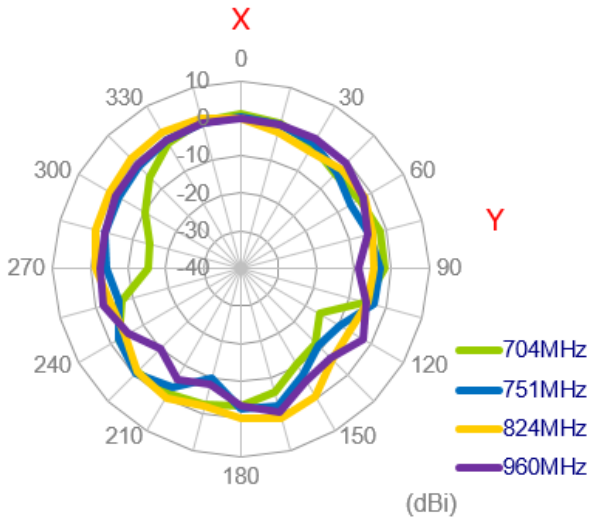







XZ Plane

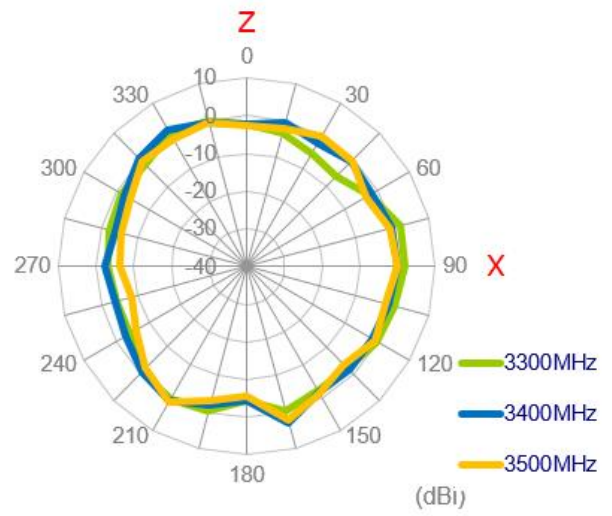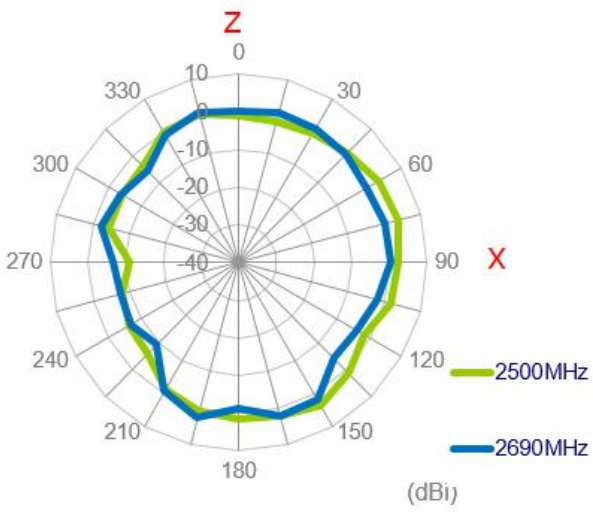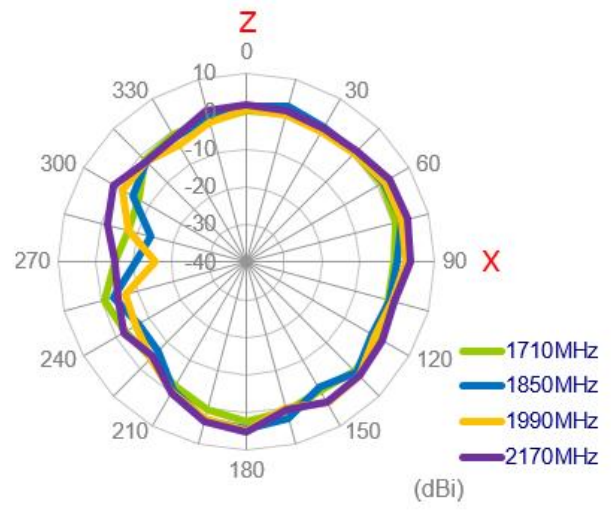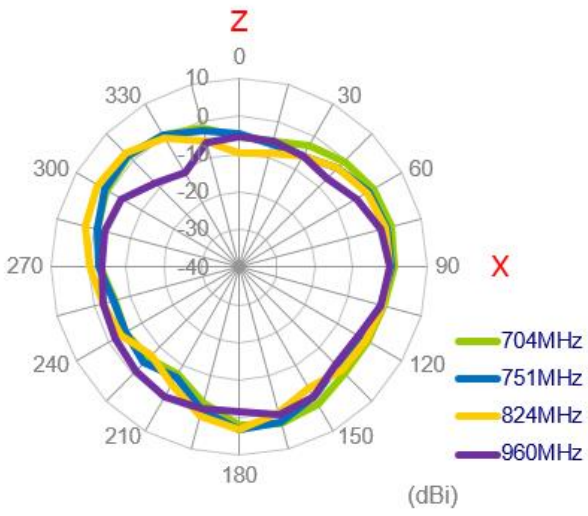




YZ Plane

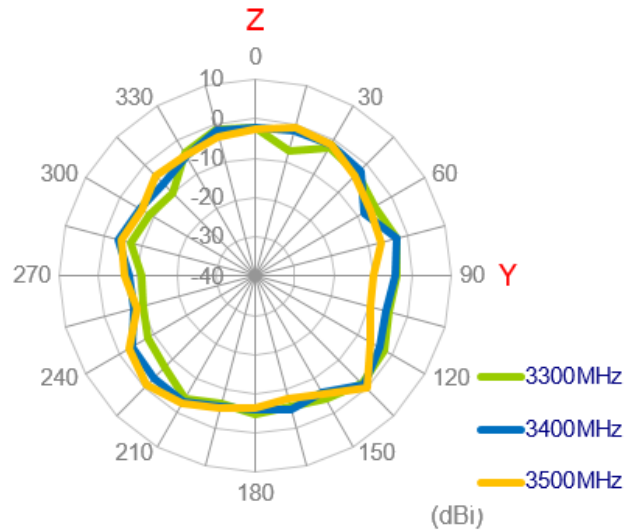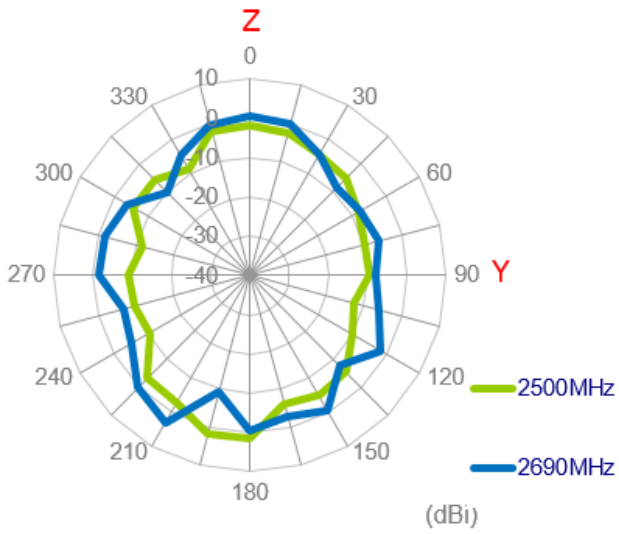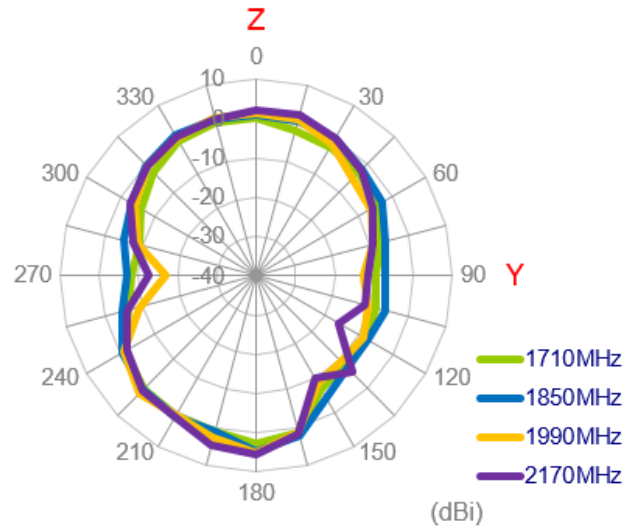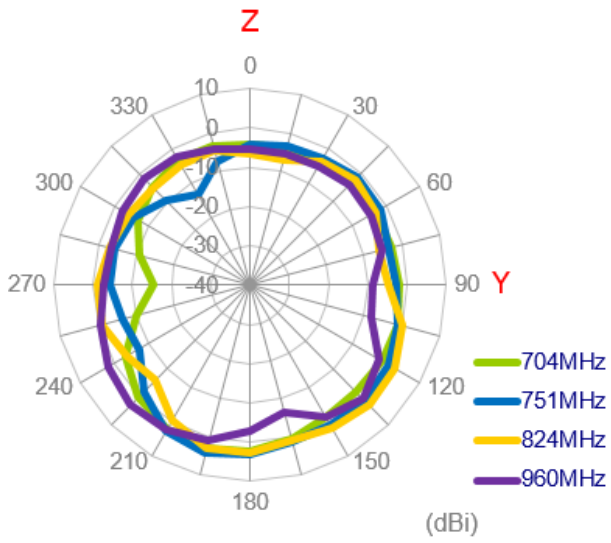





3.2.27. 3D Radiation Pattern (LTE_MIMO1 with 1M cable length on ABS)

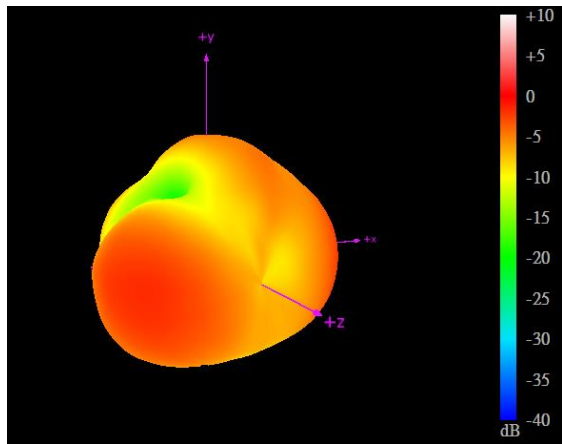


704MHz

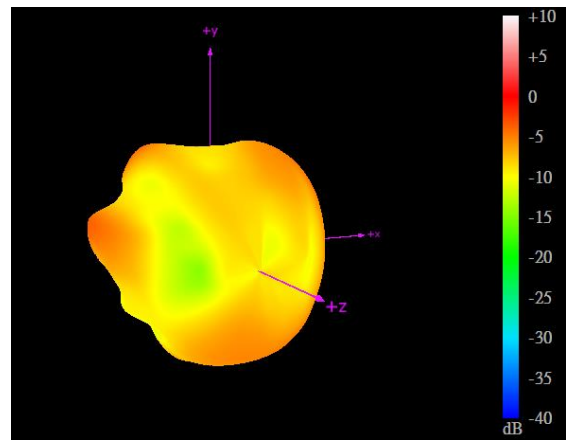


960MHz

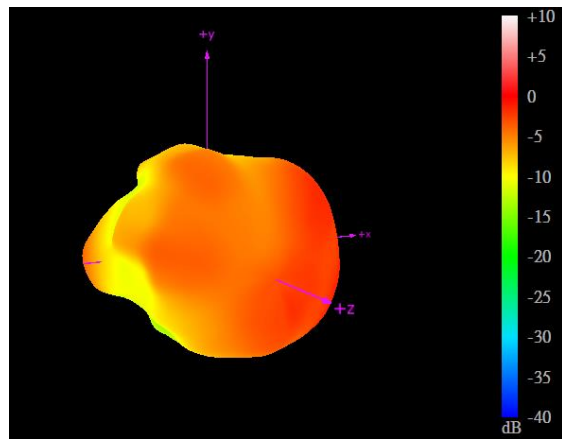


1710MHz

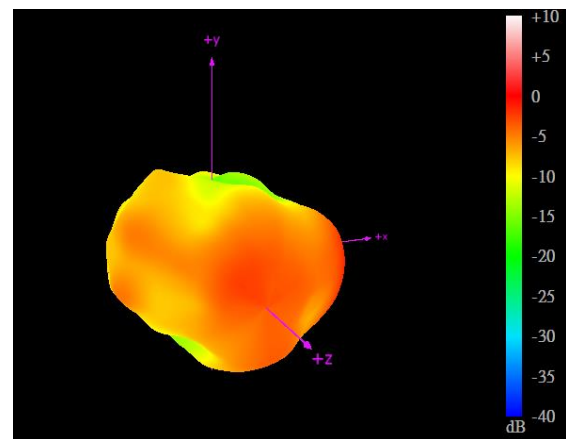

2170MHz

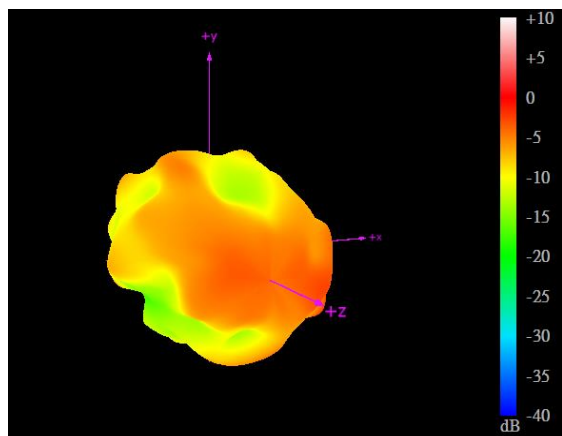





2690MHz

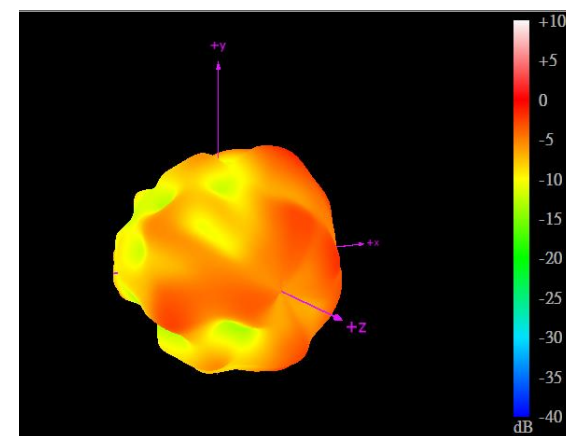





3500MHz

3.2.28. 2D Radiation Pattern (LTE_MIMO2 with 1M cable length on ABS)





XY Plane

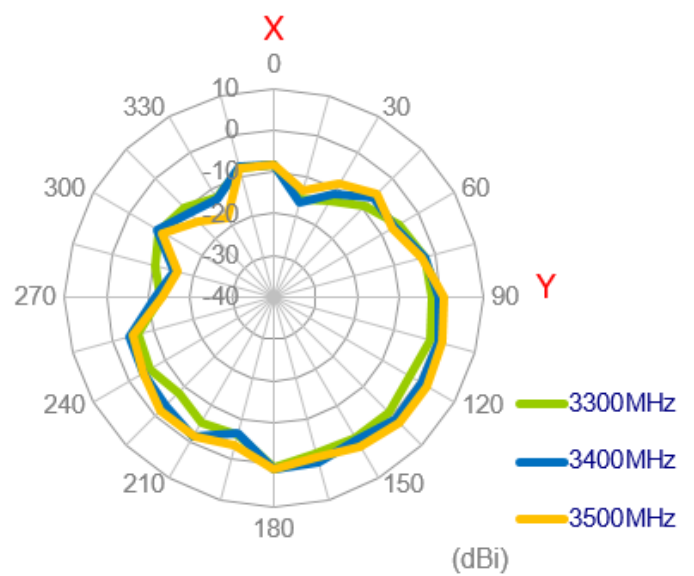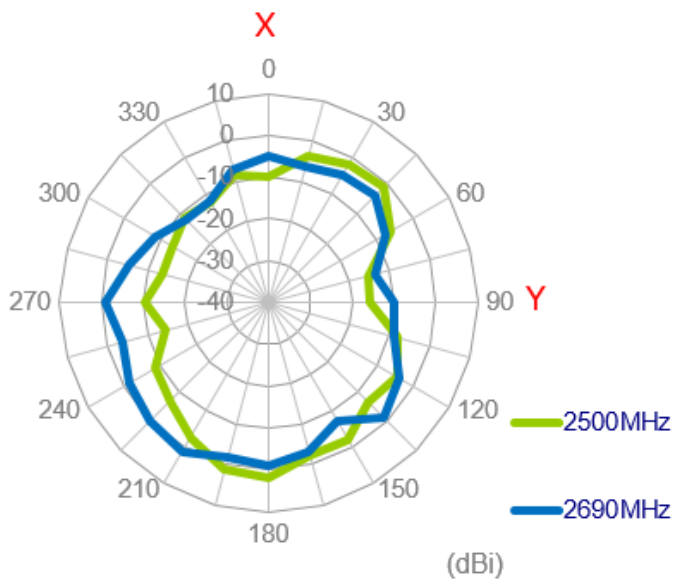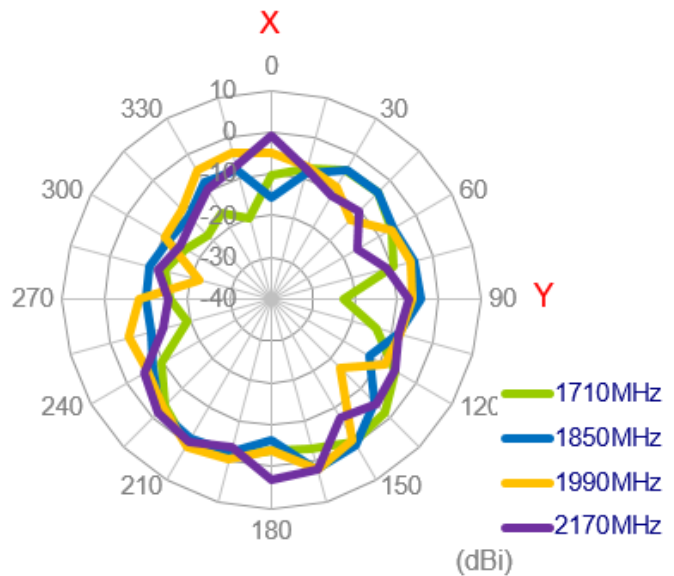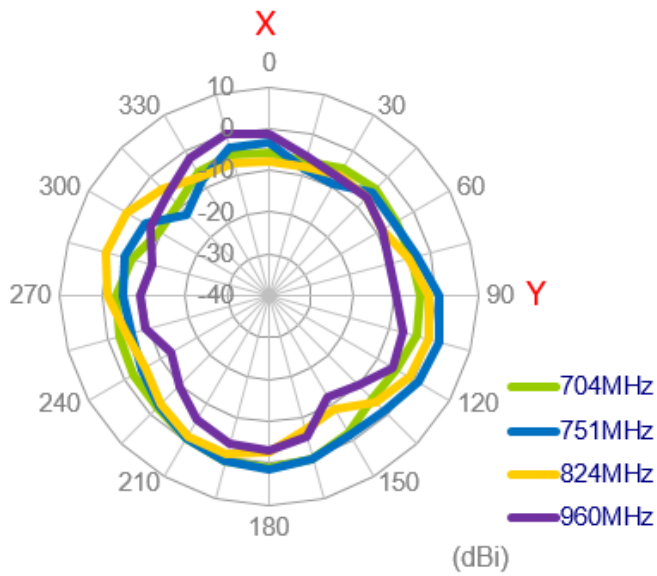


XZ Plane

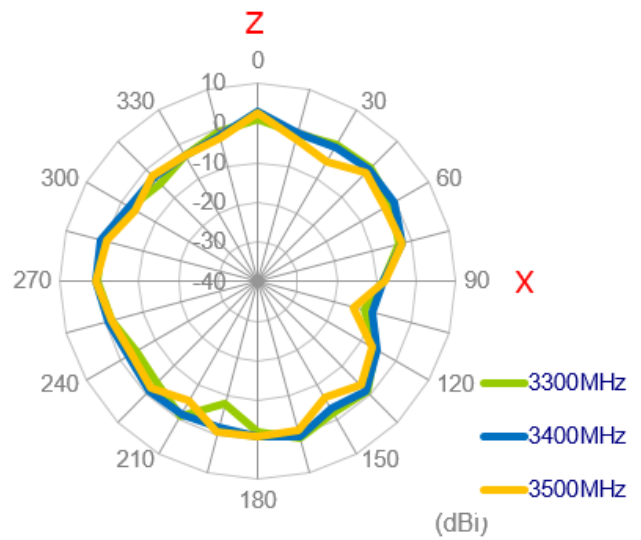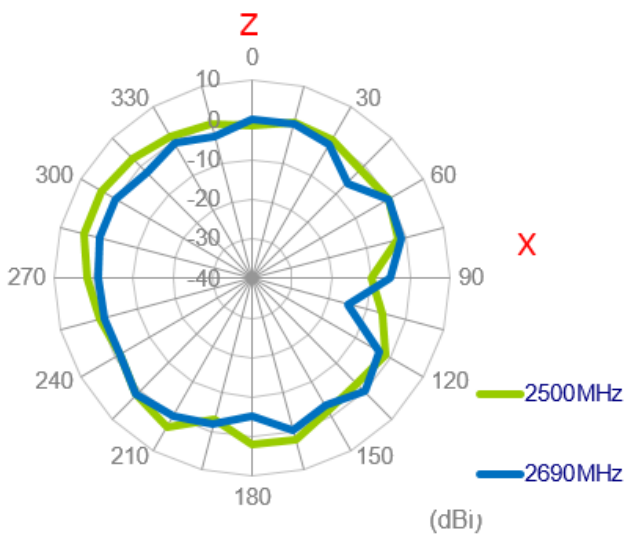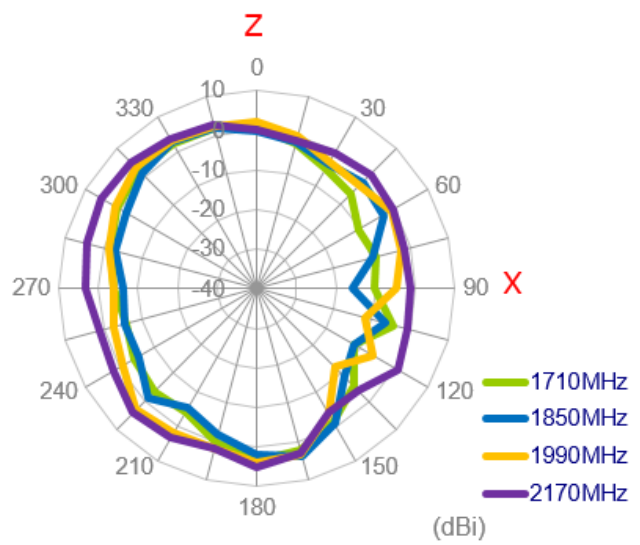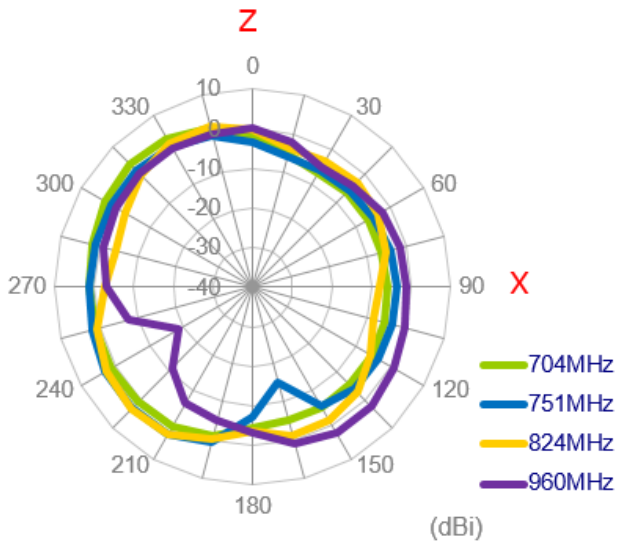


YZ Plane

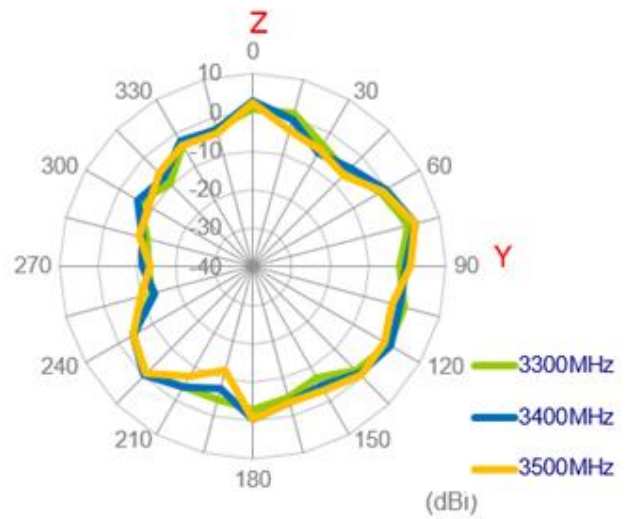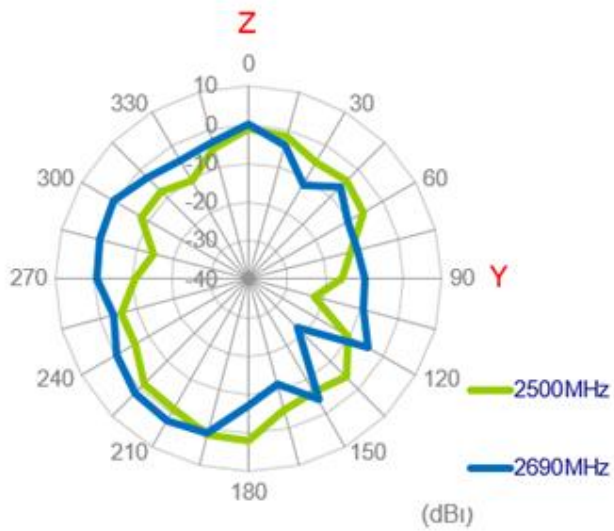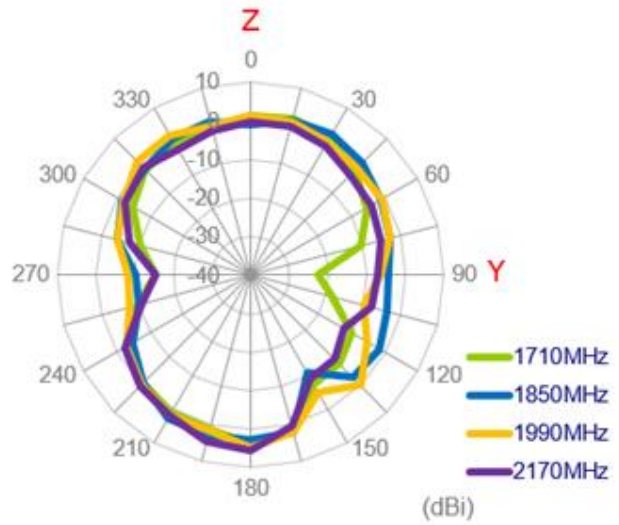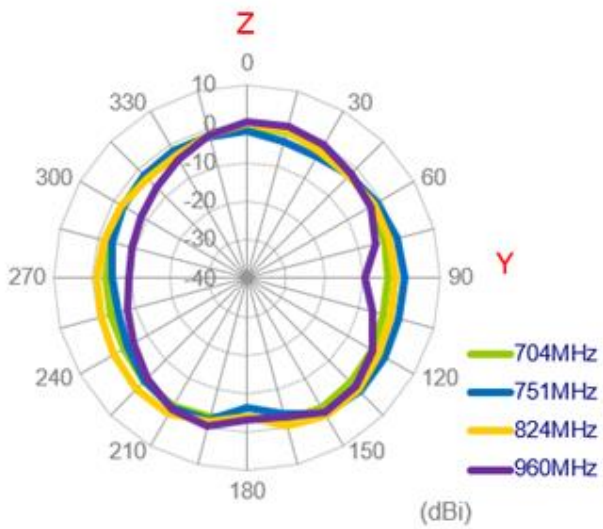


3.2.29. 3D Radiation Pattern (LTE_MIMO2 with 1M cable length on ABS)

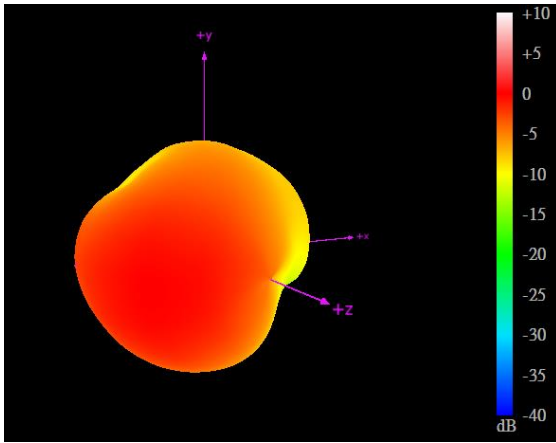


704MHz

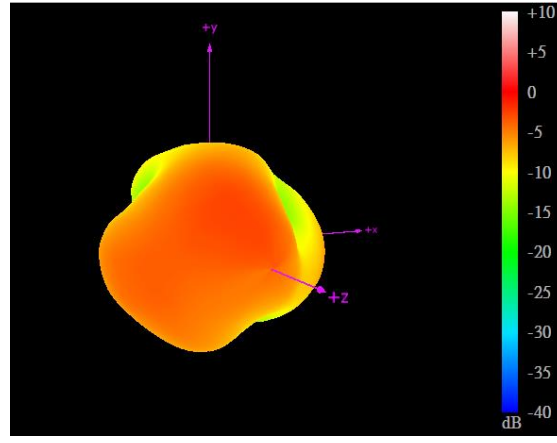


960MHz

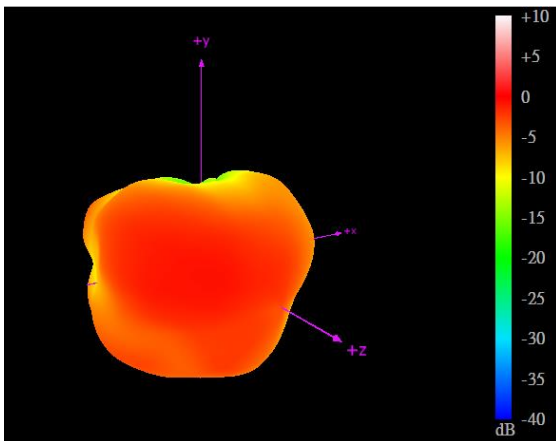


1710MHz

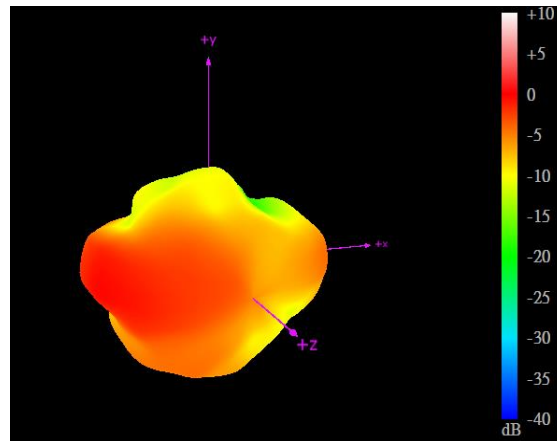

2170MHz

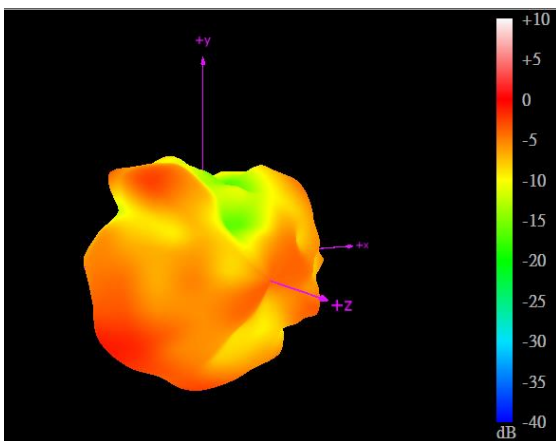



2690MHz

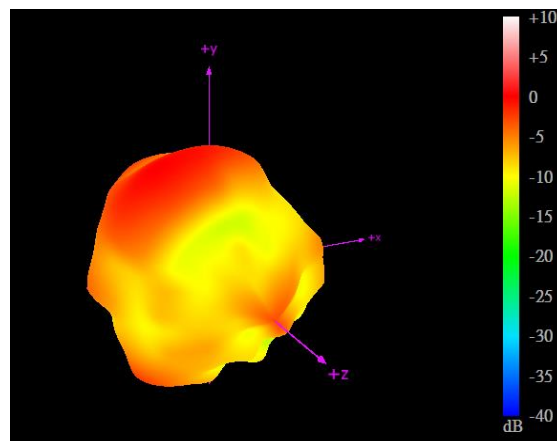



3500MHz

3.2.30. 2D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length on



XY Plane

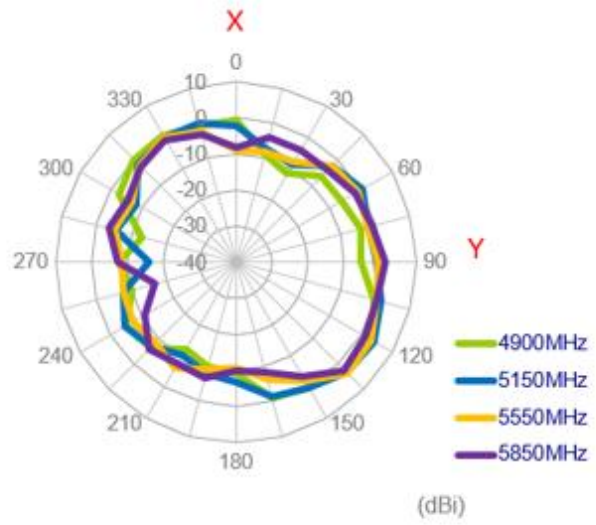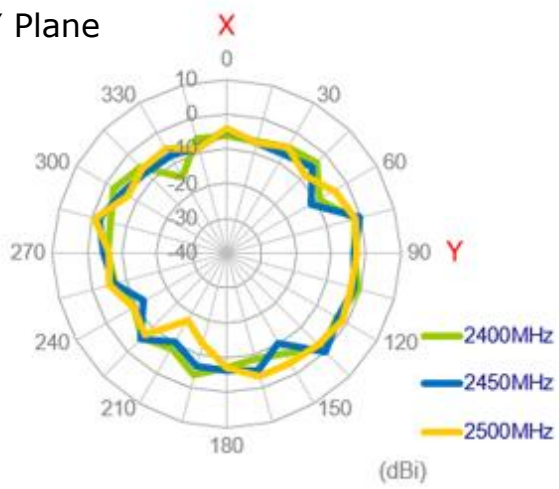

XZ Plane

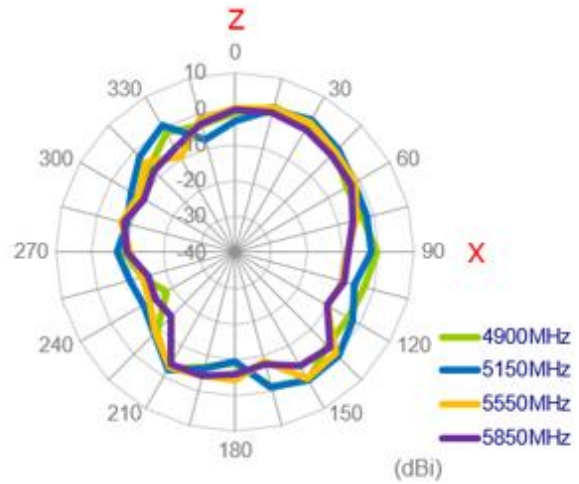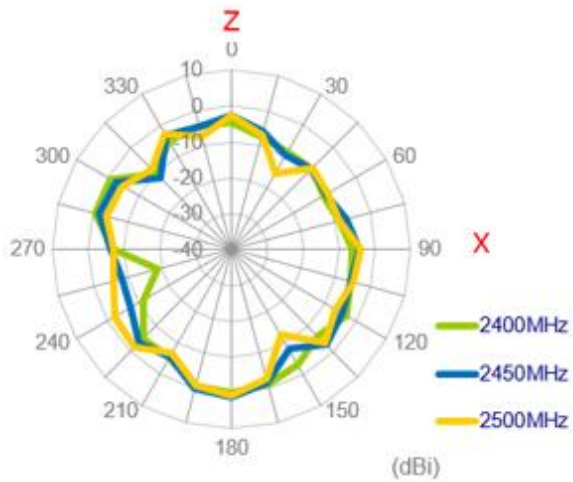


YZ Plane

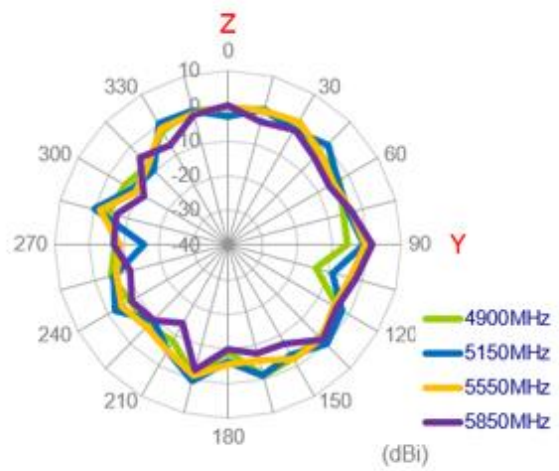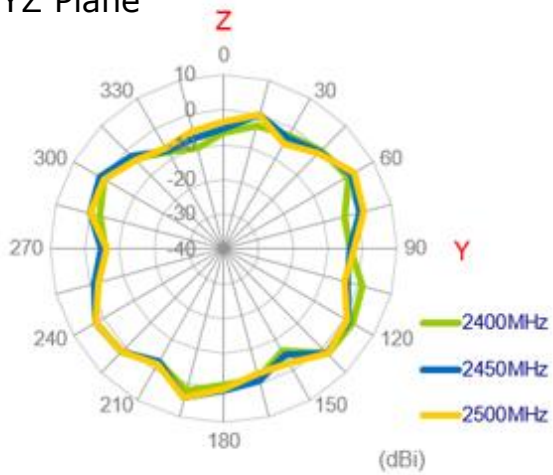


ABS)

3.2.31. 3D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length on ABS)

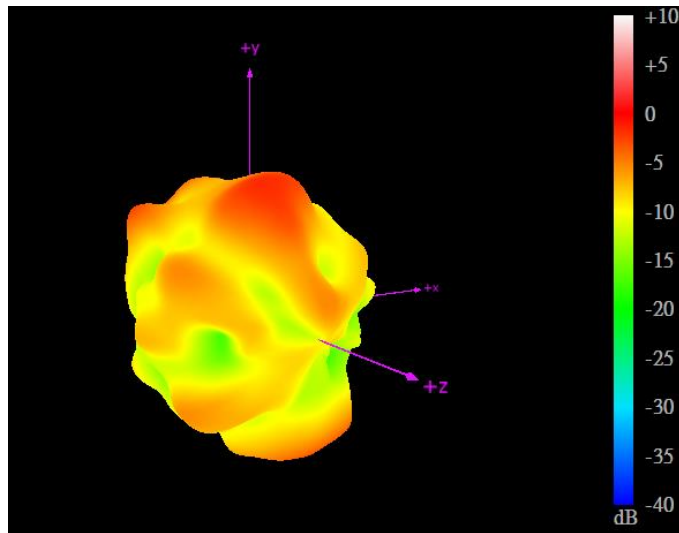



2450MHz

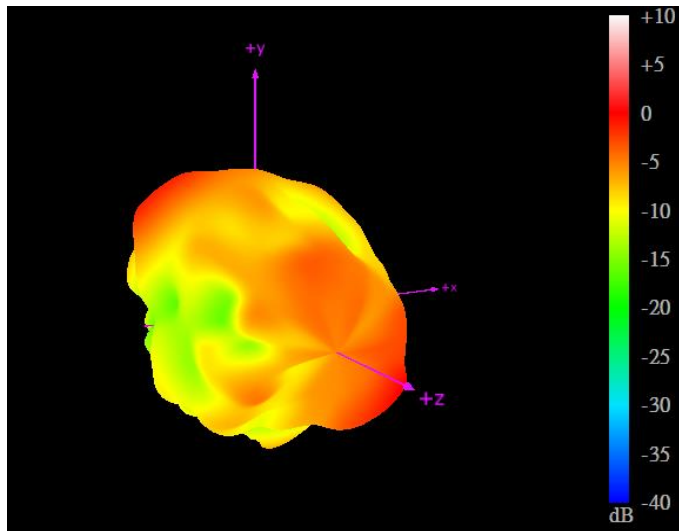



5550MHz

3.2.32. 2D Radiation Pattern (Wi-Fi_MIMO2 with 3M cable length of ABS)



XY Plane

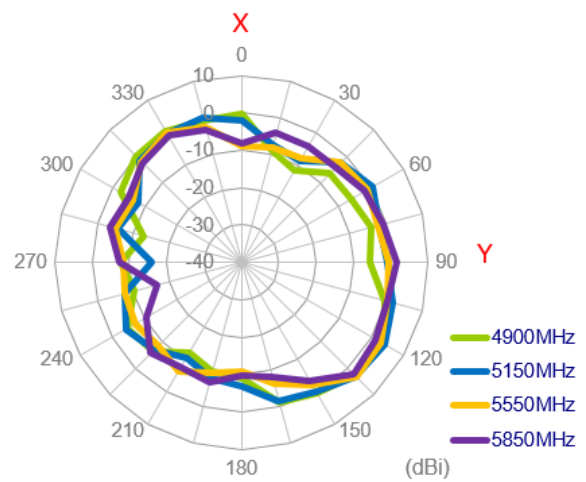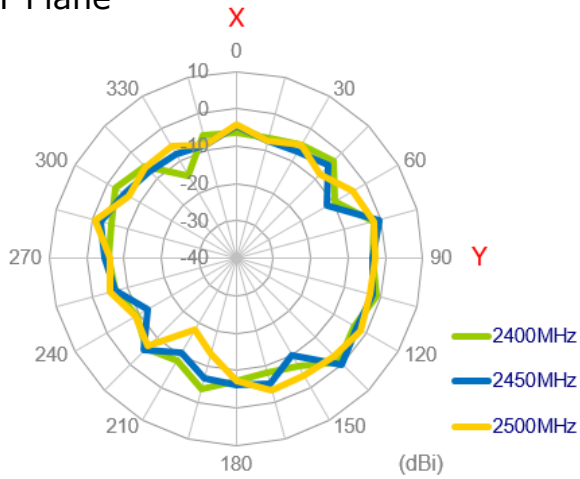


XZ Plane

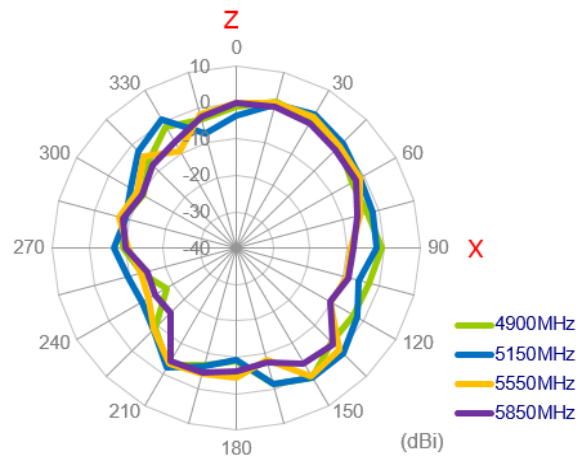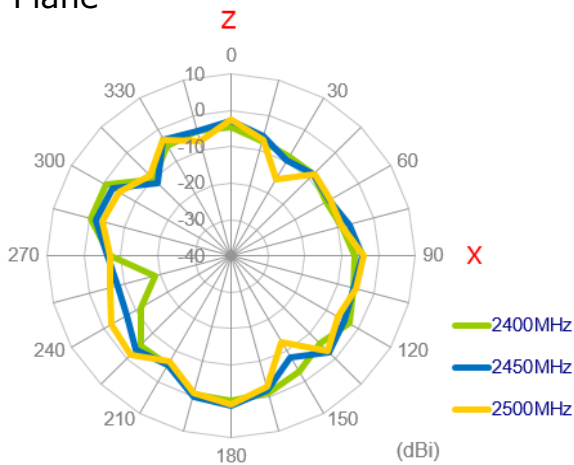


YZ Plane

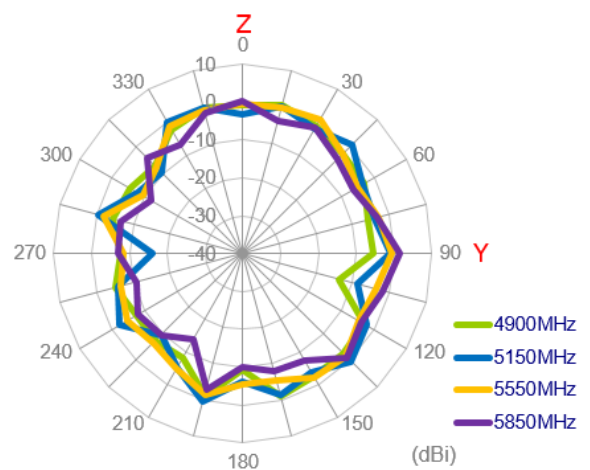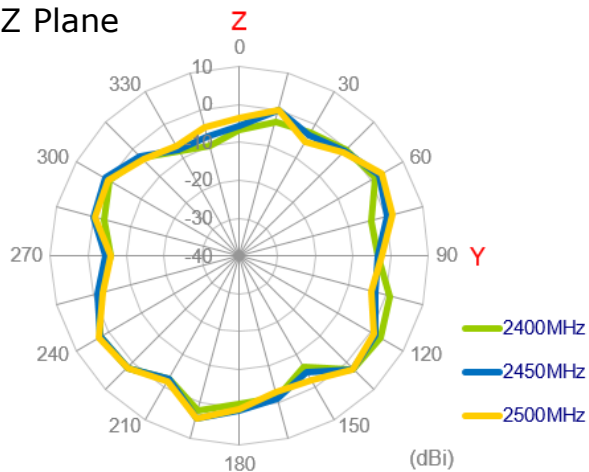

3.2.33. 3D Radiation Pattern (Wi-Fi_MIMO2 with 1M cable length on ABS)

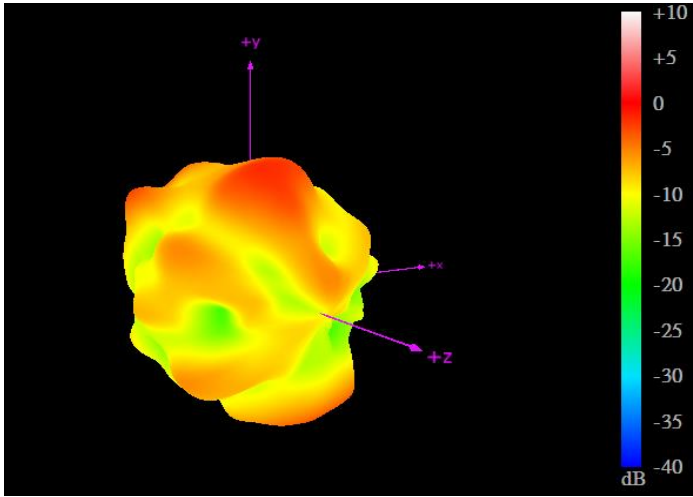


2450MHz

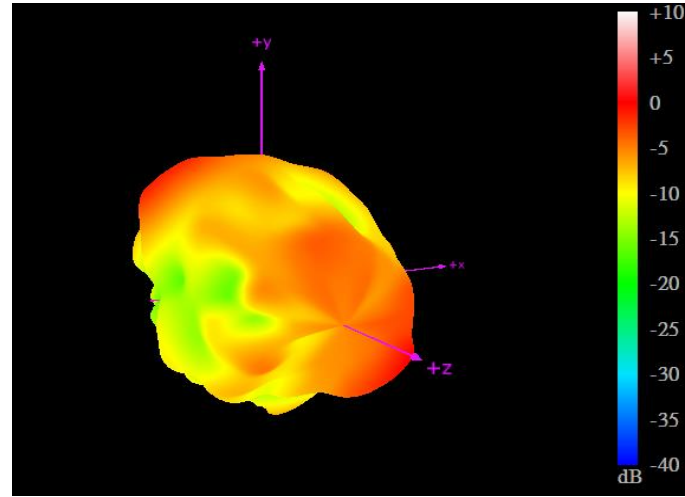

5550MHz

3.2.34. Test Setup for Antenna Radiation Pattern




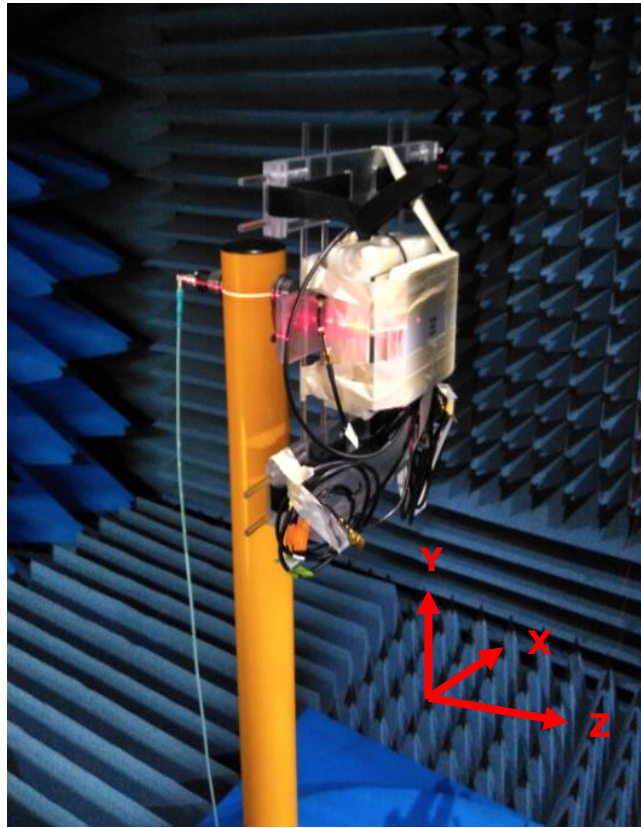


On glass







3.2.35. 2D Radiation Pattern (LTE_MIMO1 with 1M cable length on glass)

XY Plane

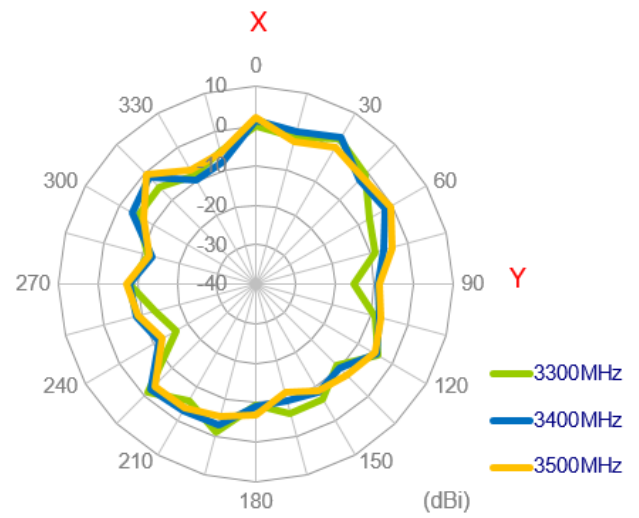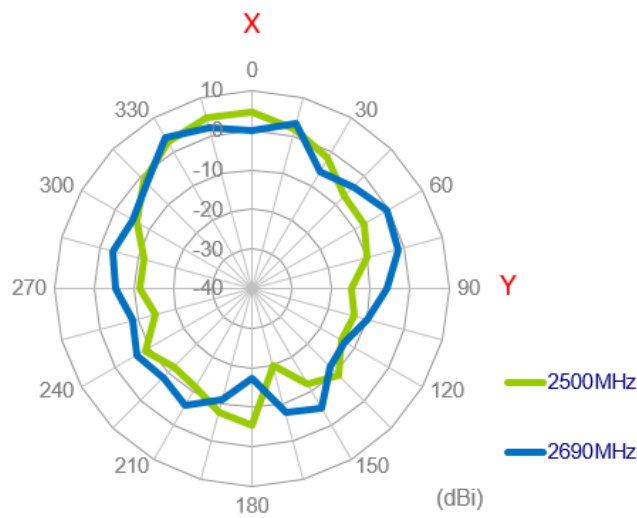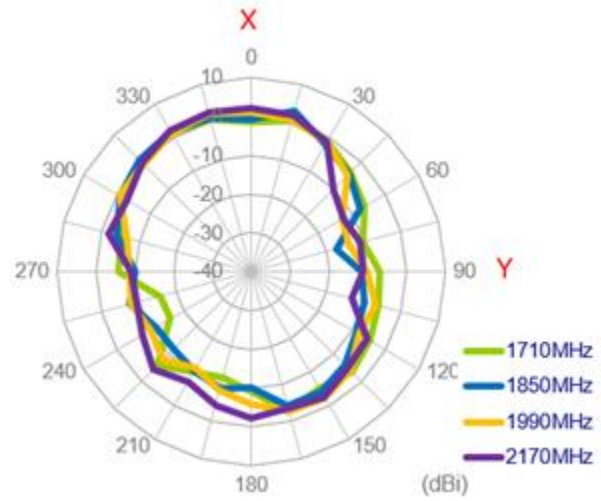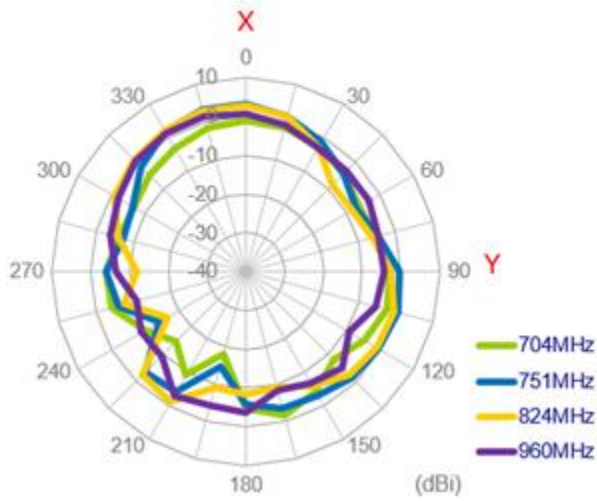







XZ Plane

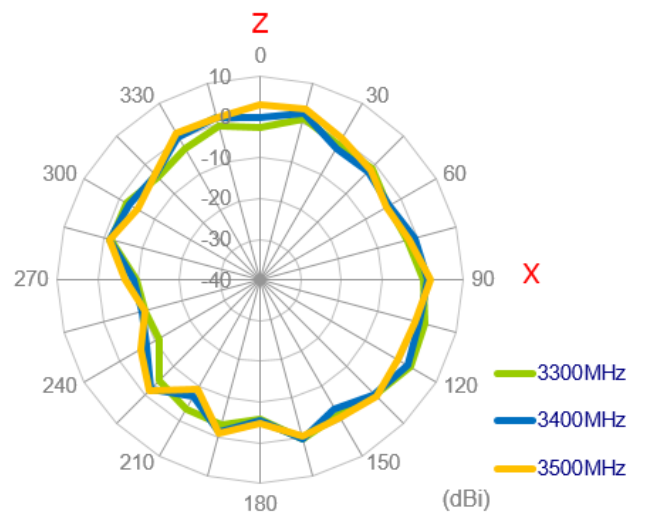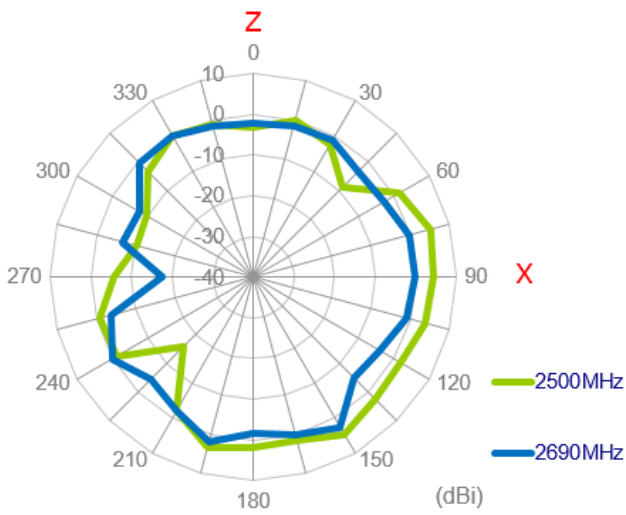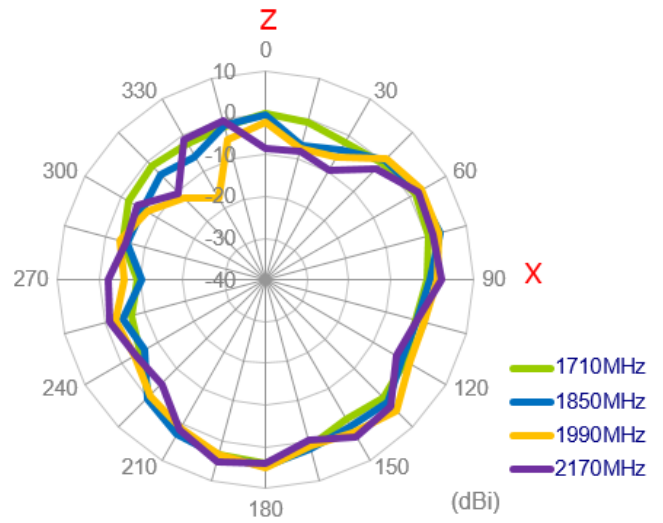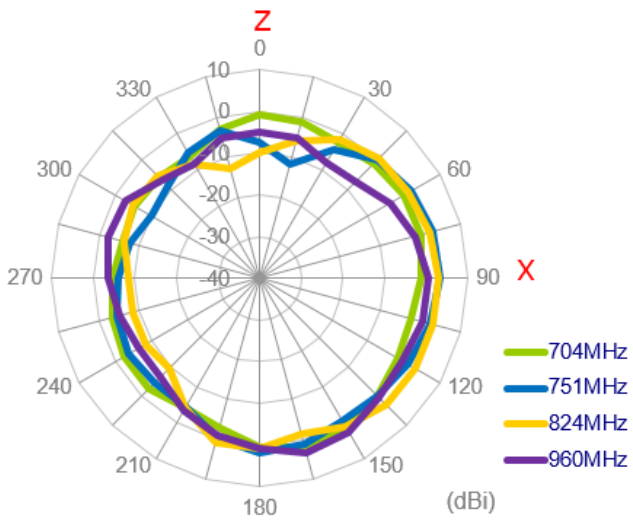




YZ Plane

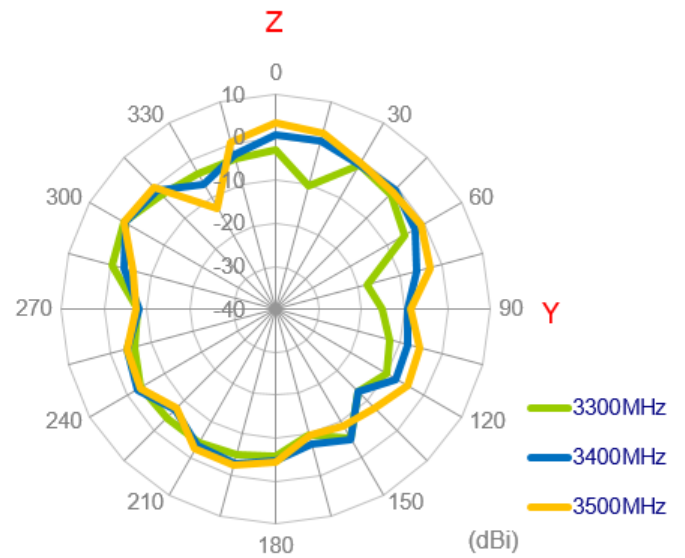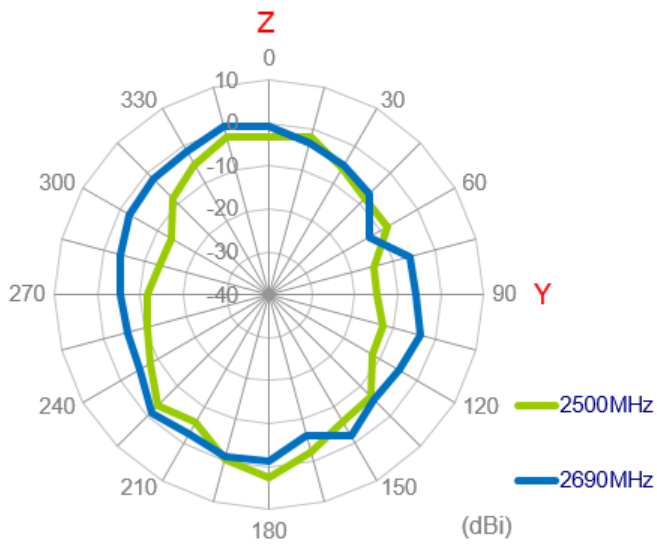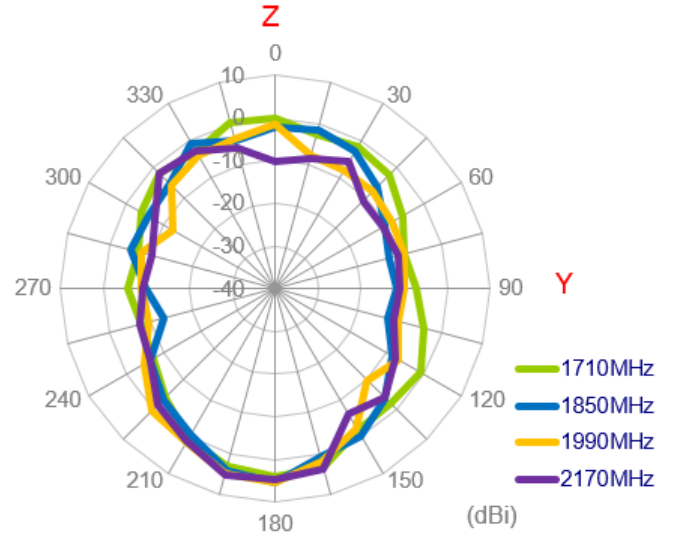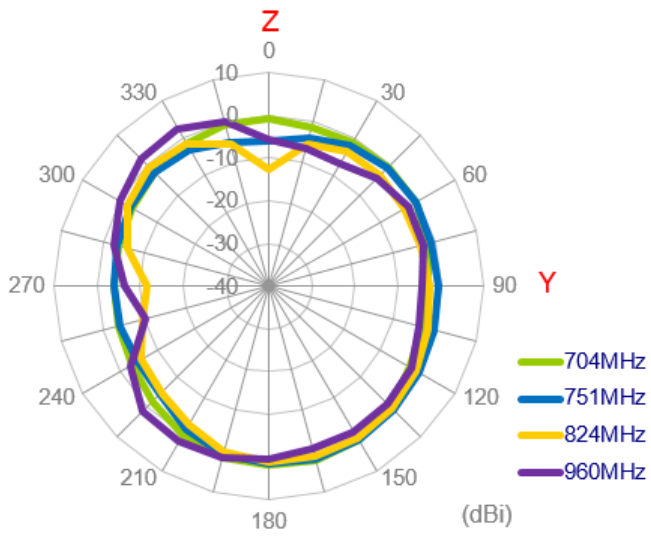





3.2.36. 3D Radiation Pattern (LTE_MIMO1 with 1M cable length on glass)

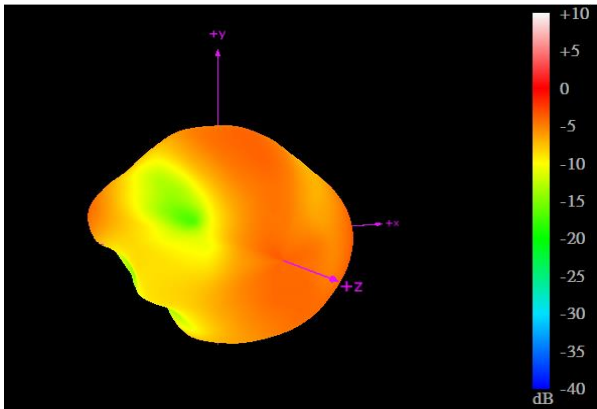


704MHz

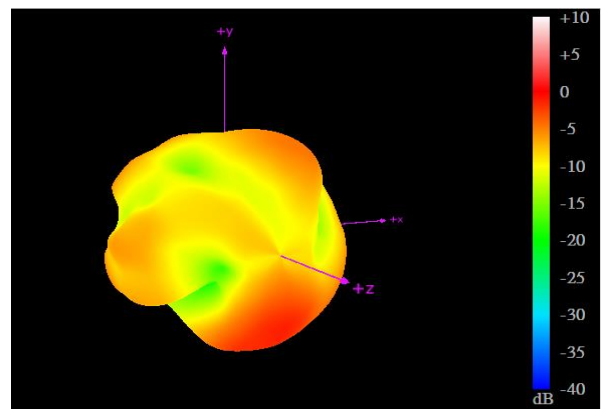


960MHz

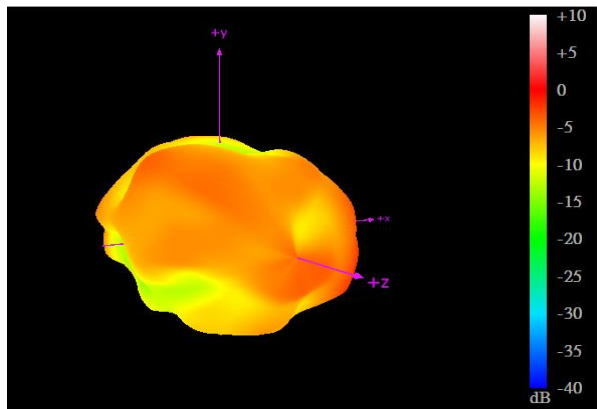


1710MHz

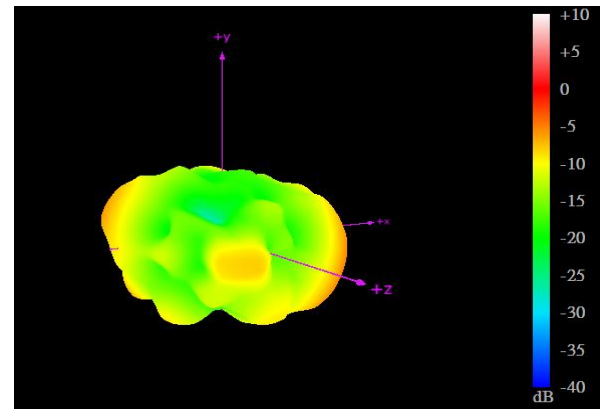

2170MHz

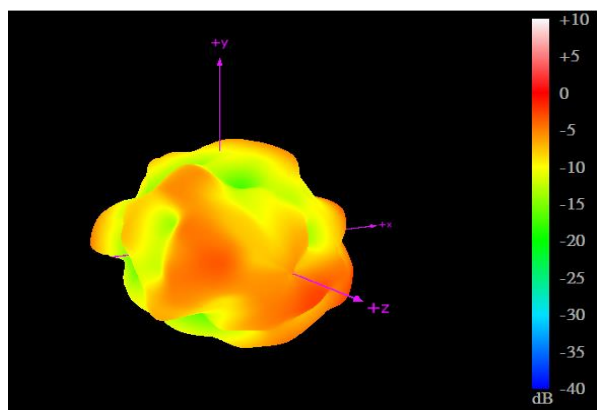





2690MHz

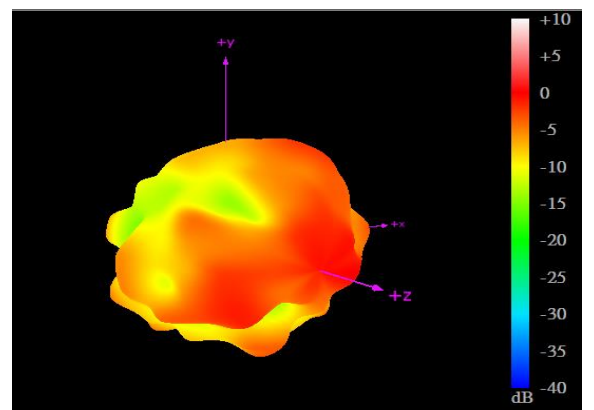

3500MHz





3.2.37. 2D Radiation Pattern (LTE_MIMO2 with 1M cable length on glass)

XY Plane

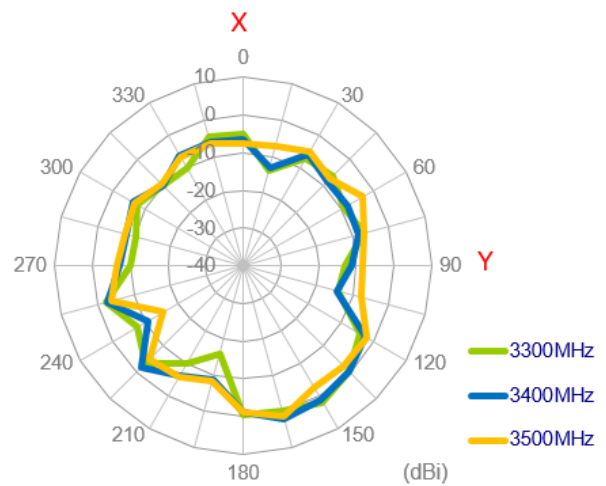
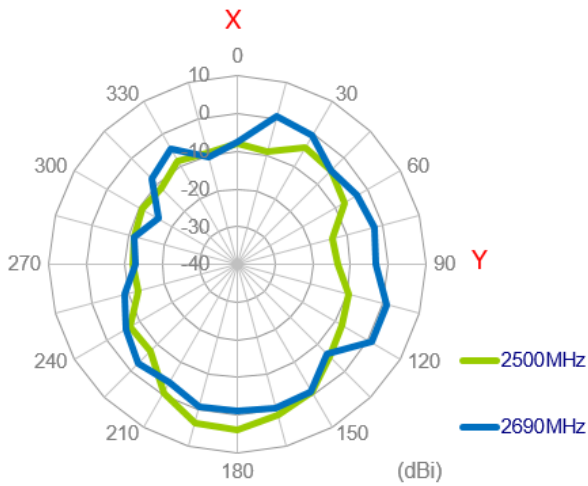
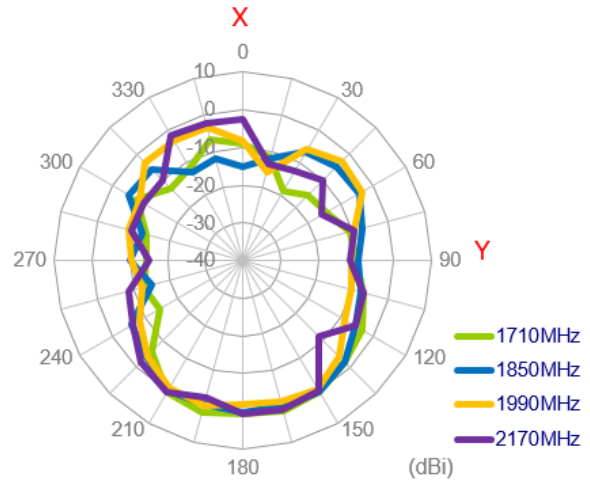
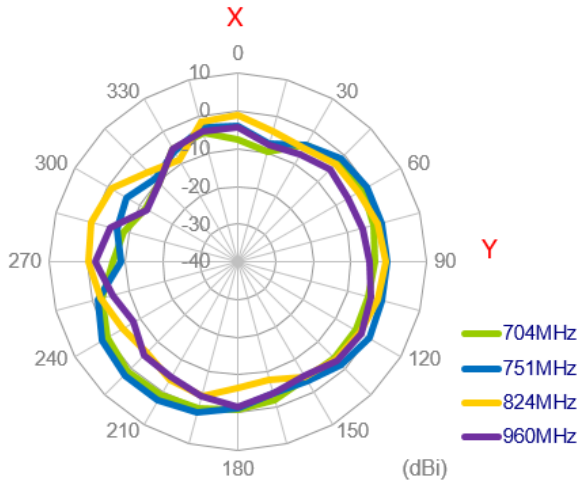





XZ Plane

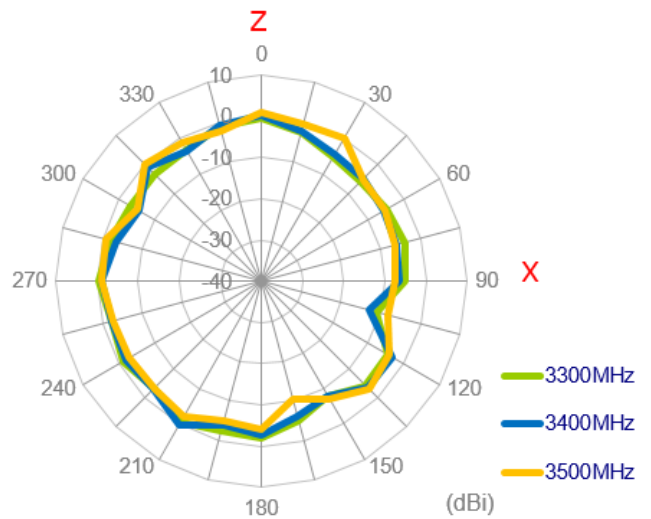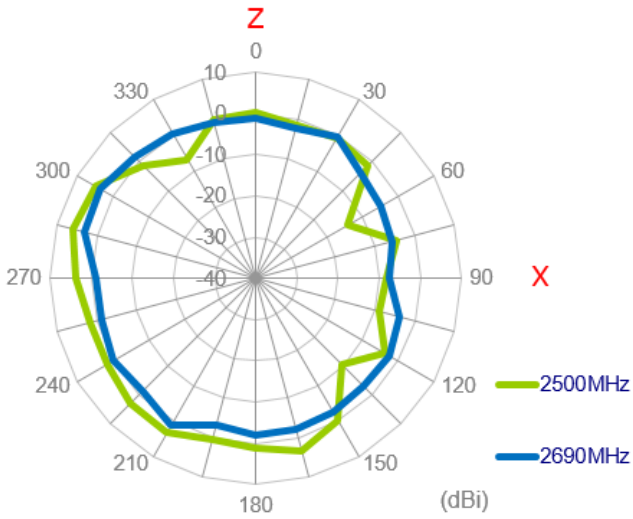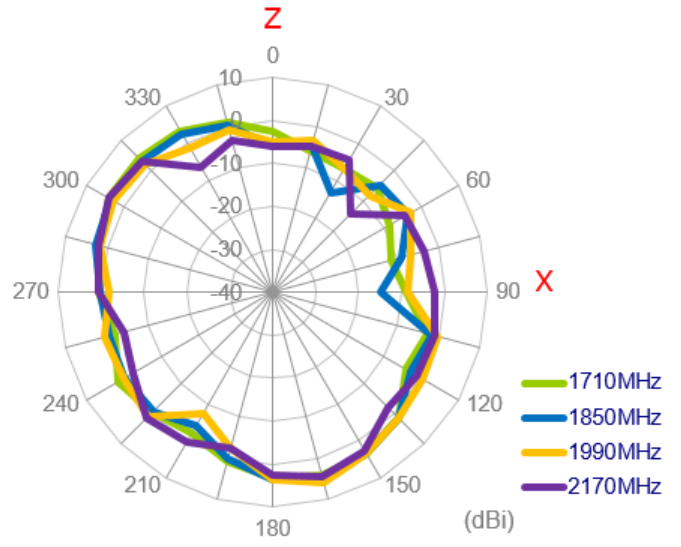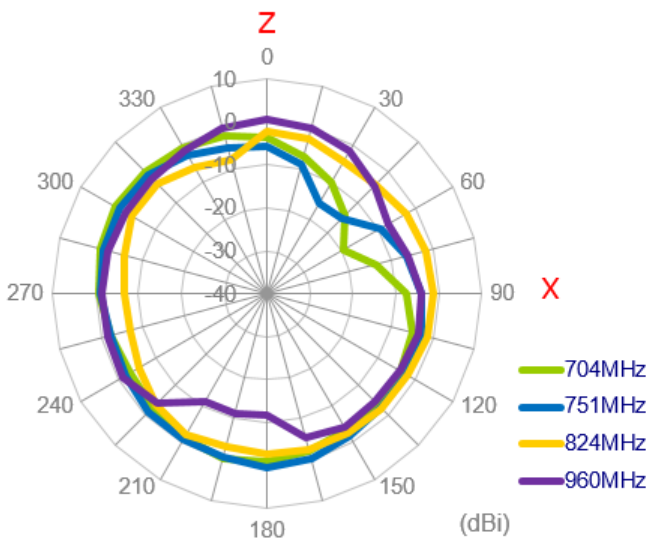


YZ Plane

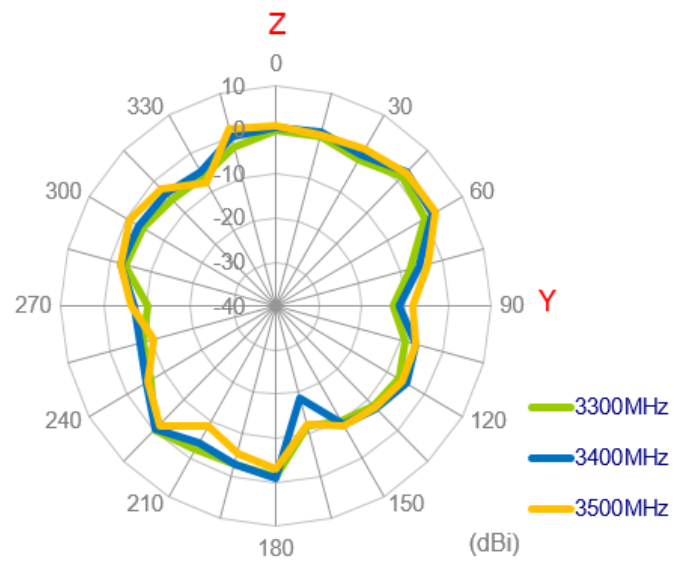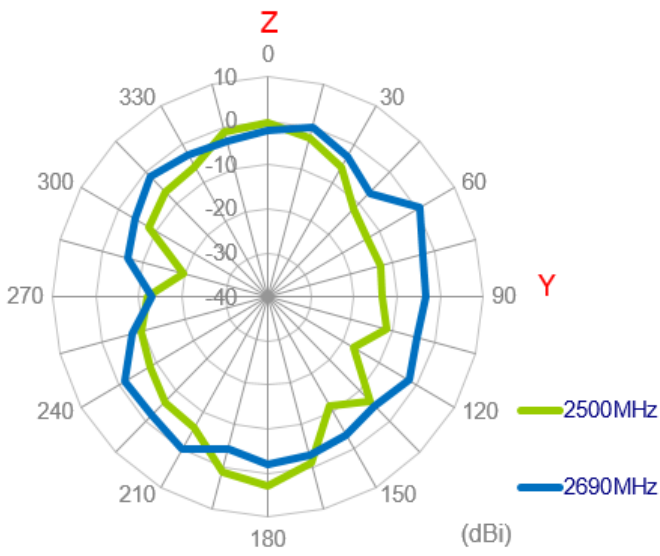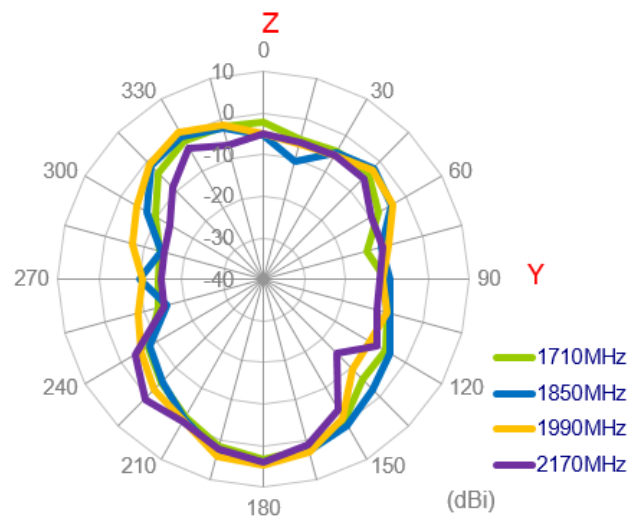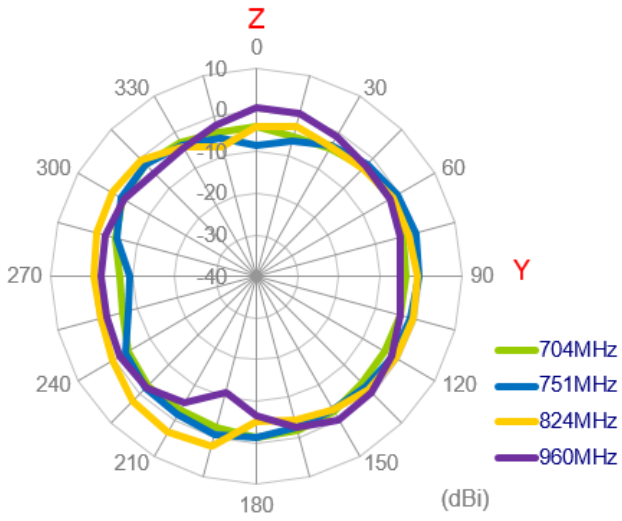


3.2.38. 3D Radiation Pattern (LTE_MIMO2 with 1M cable length on glass)

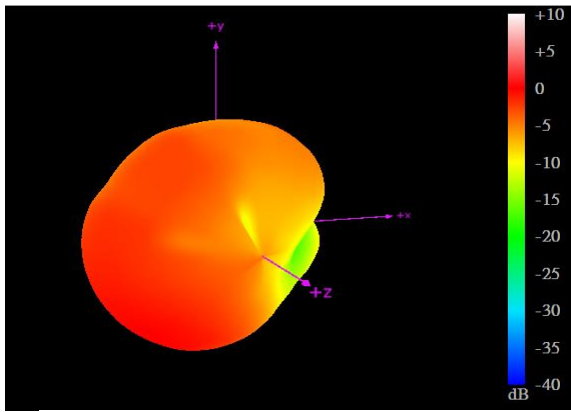


704MHz

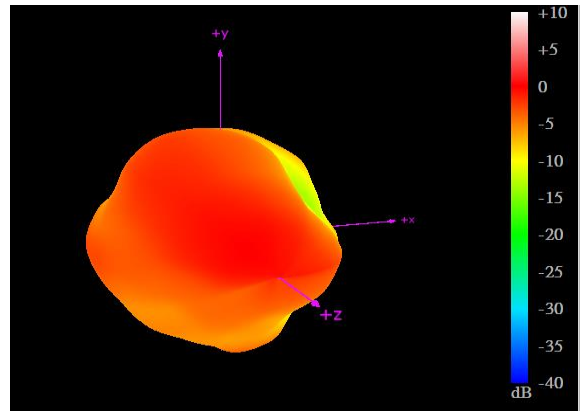


960MHz

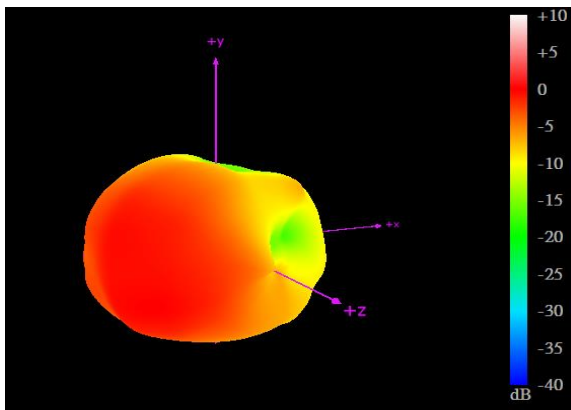


1710MHz

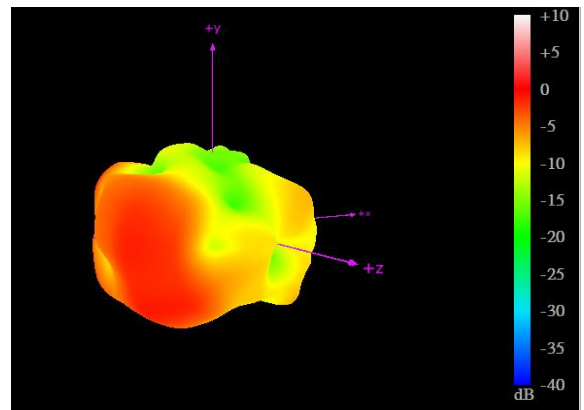

2170MHz

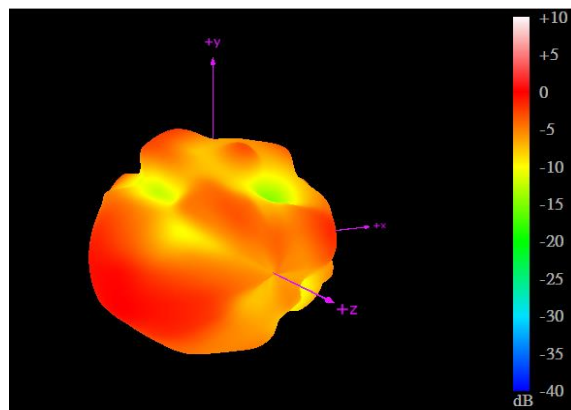



2690MHz

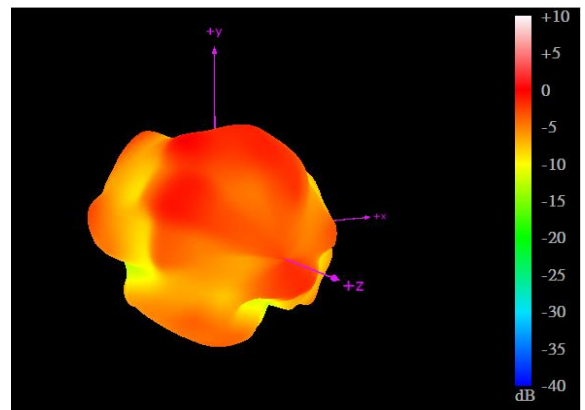



3500MHz

3.2.39. 2D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length on glass)



XY Plane

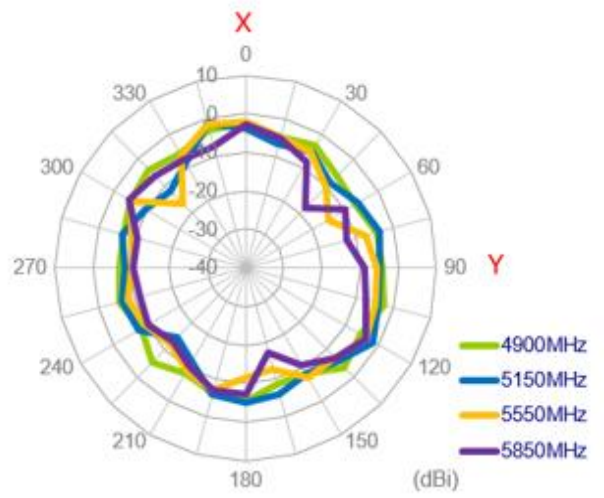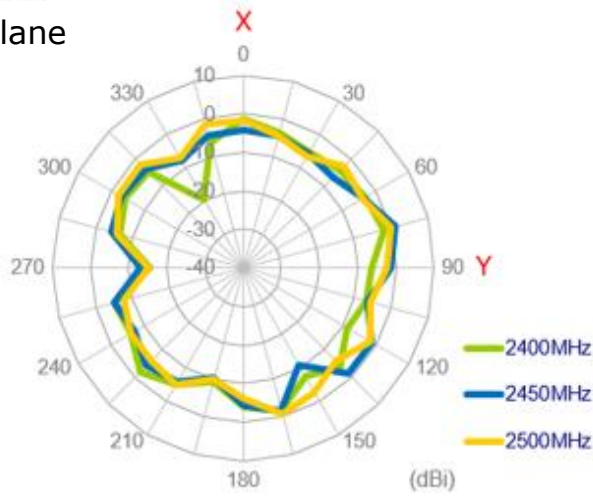


XZ Plane

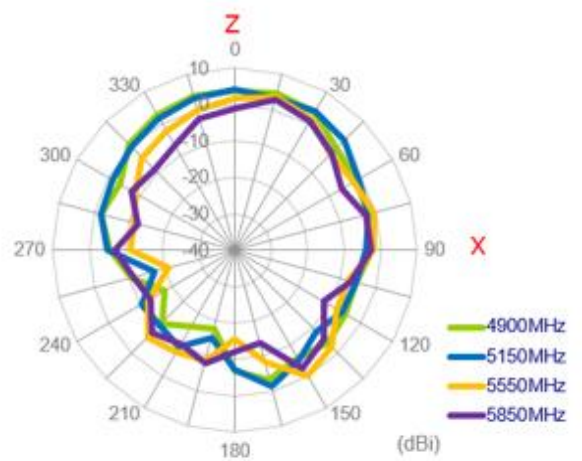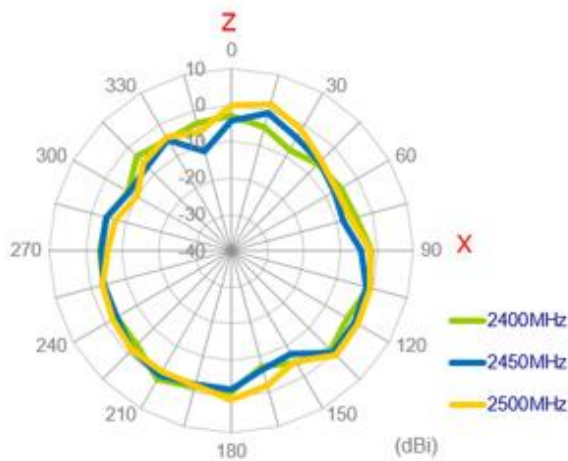


YZ Plane

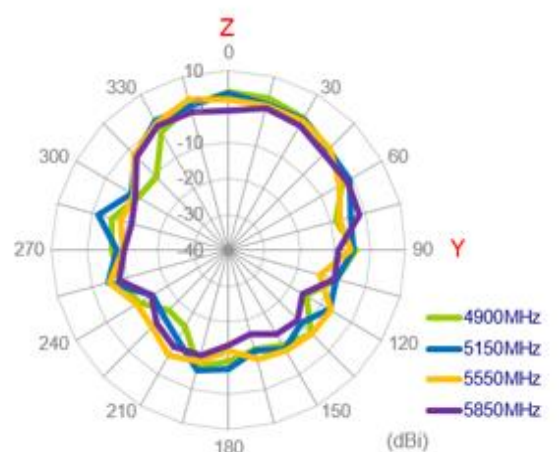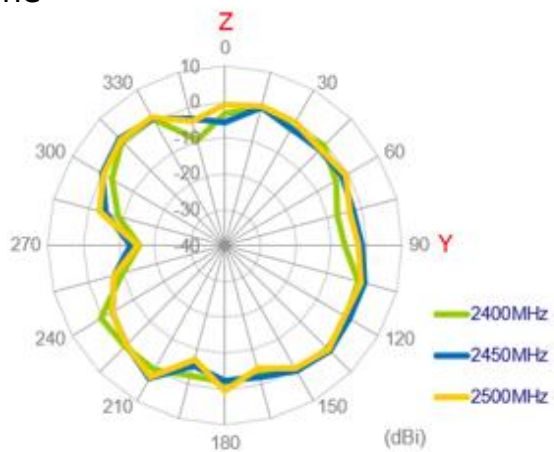

3.2.40. 3D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length on glass)

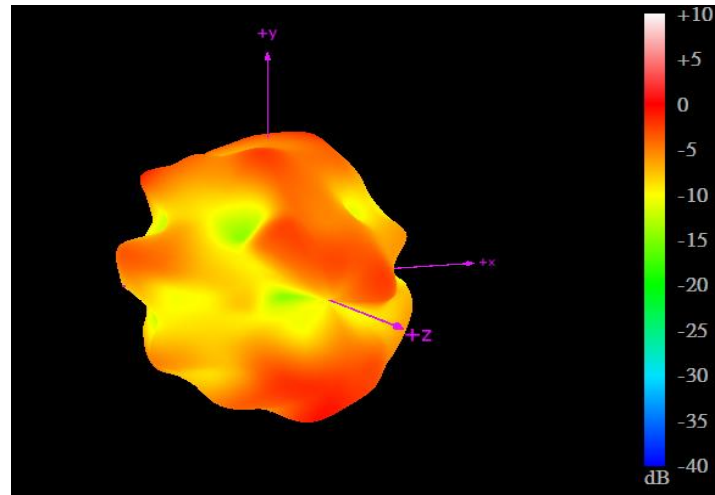



2450MHz

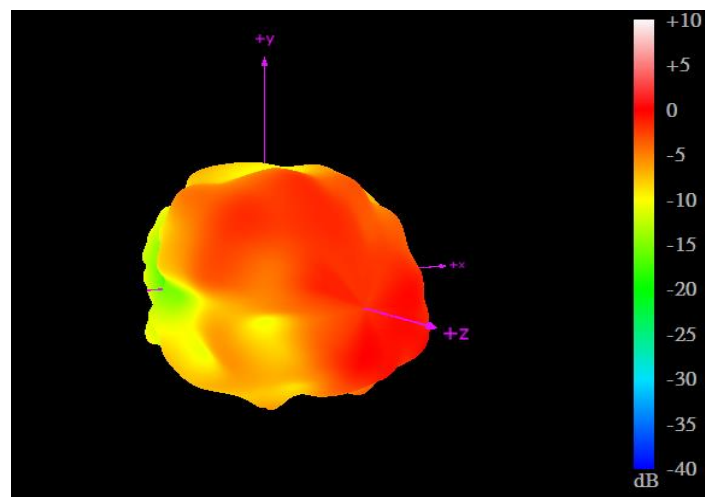



5550MHz

3.2.41. 2D Radiation Pattern (Wi-Fi_MIMO2 with 3M cable length on glass)



XY Plane

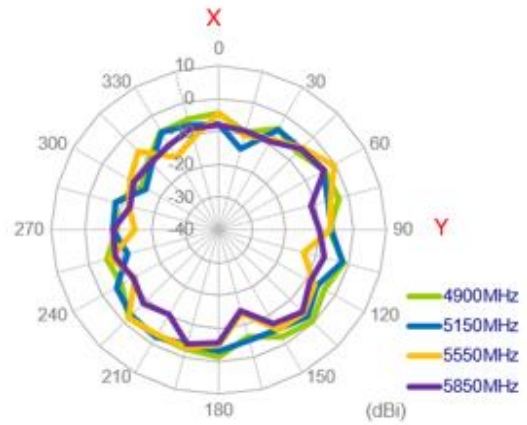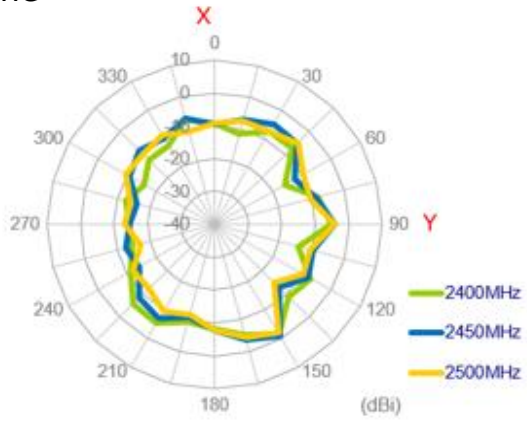

XZ Plane

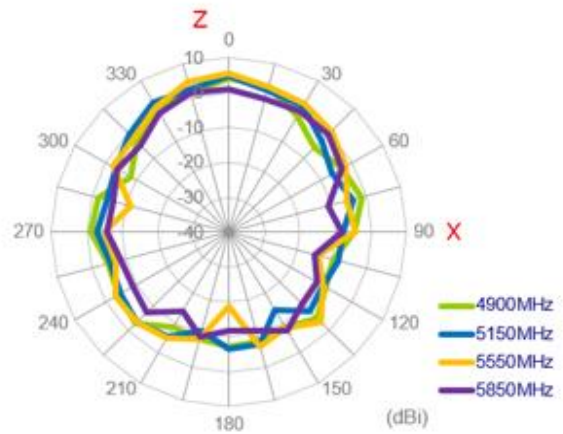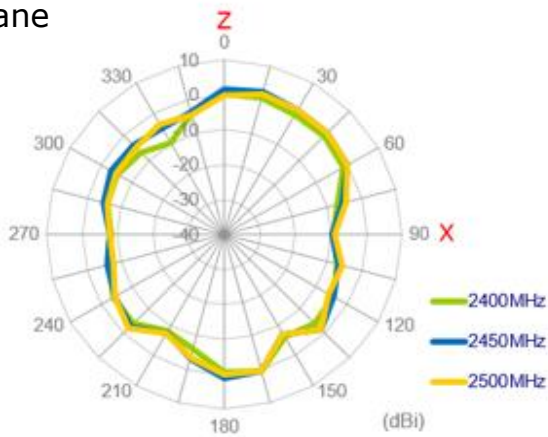


YZ Plane

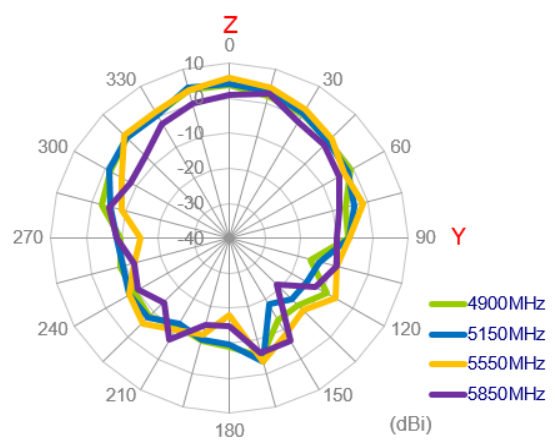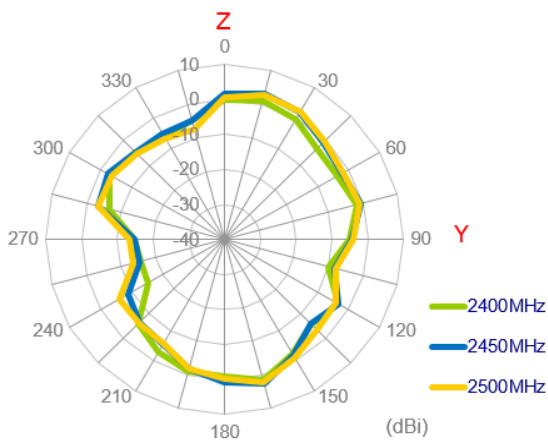




3.2.42. 3D Radiation Pattern (Wi-Fi_MIMO2 with 1M cable length on glass)

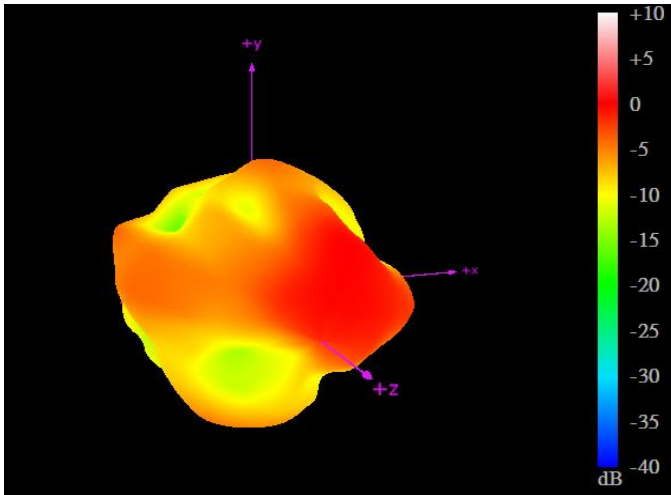


2450MHz

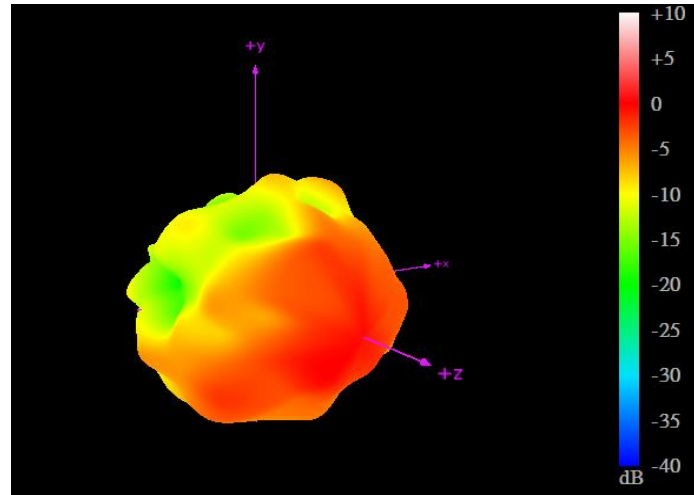

5550MHz





3.2.43. Test Setup for Antenna Radiation Pattern

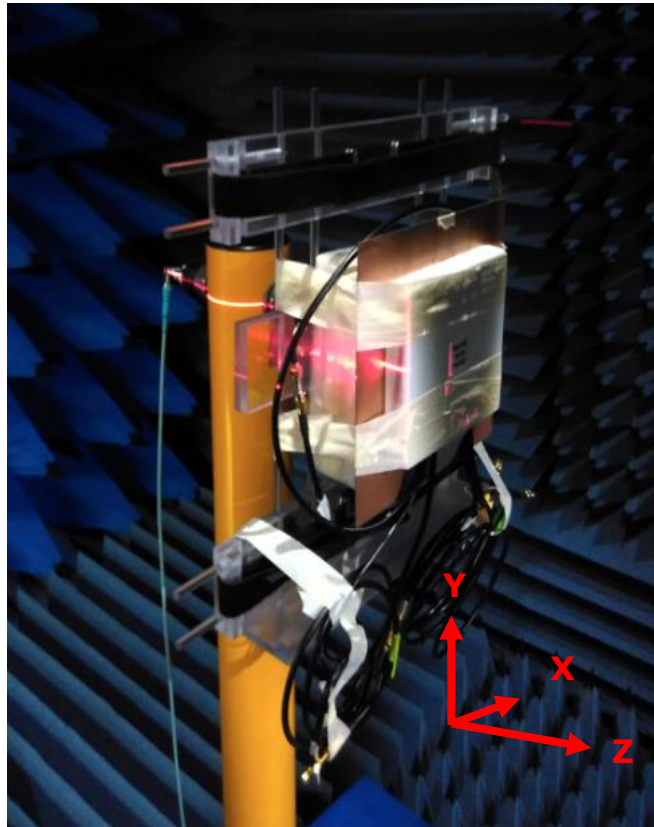

On metal





3.2.44. 2D Radiation Pattern (LTE_MIMO1 with 1M cable length on metal)

XY Plane

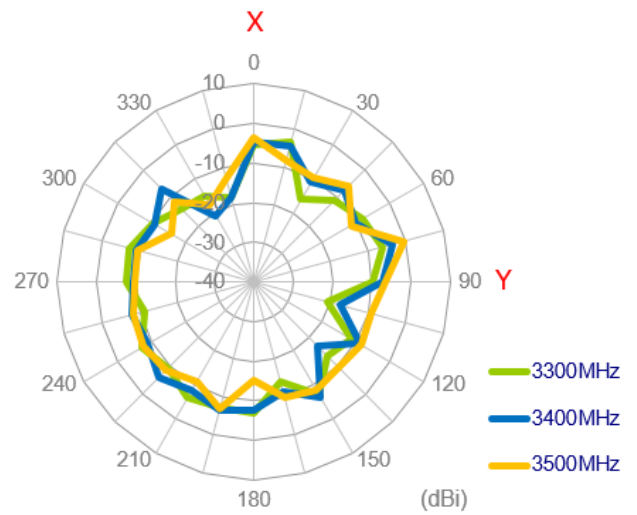
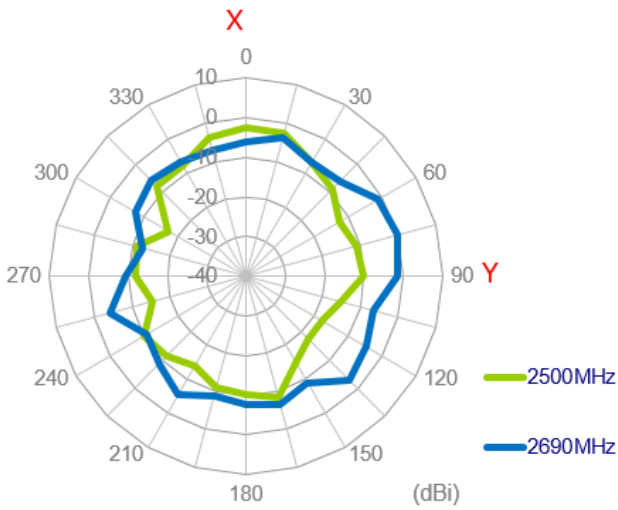
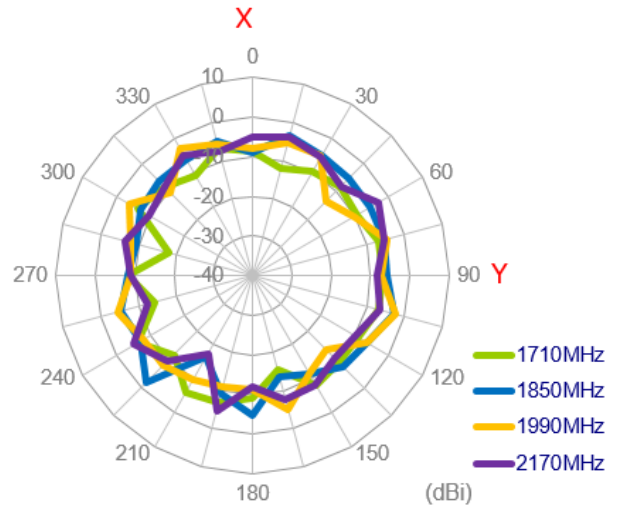
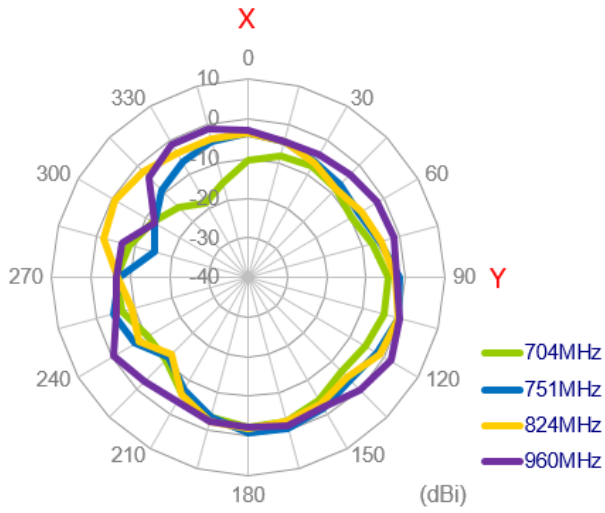




XZ Plane

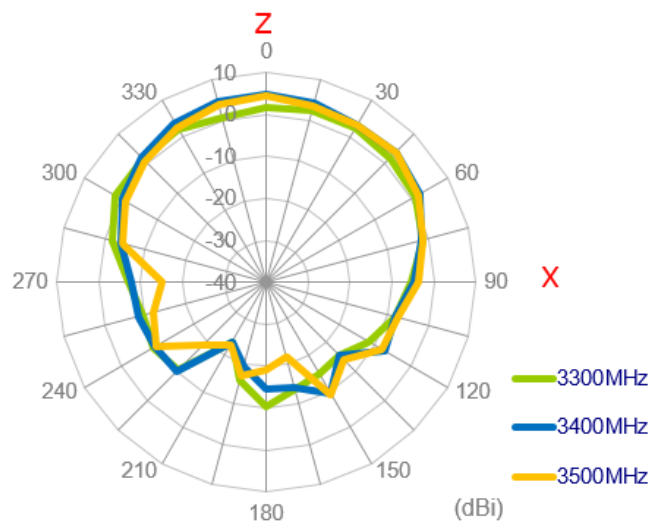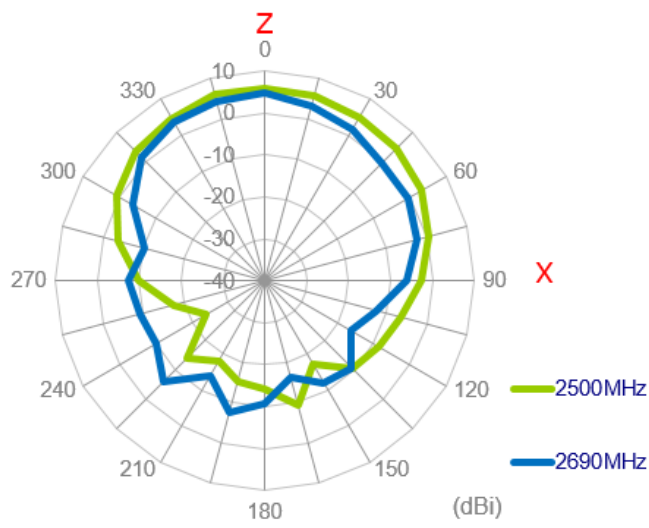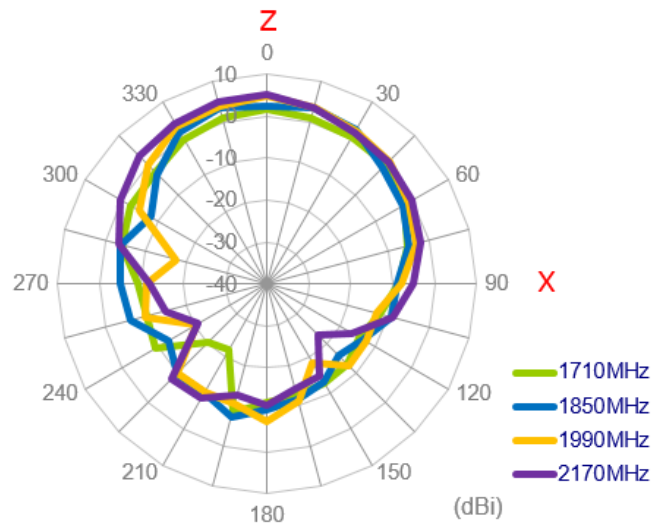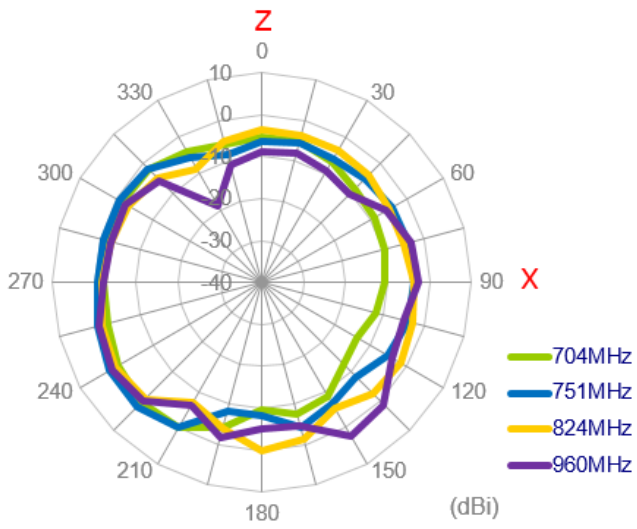


YZ Plane

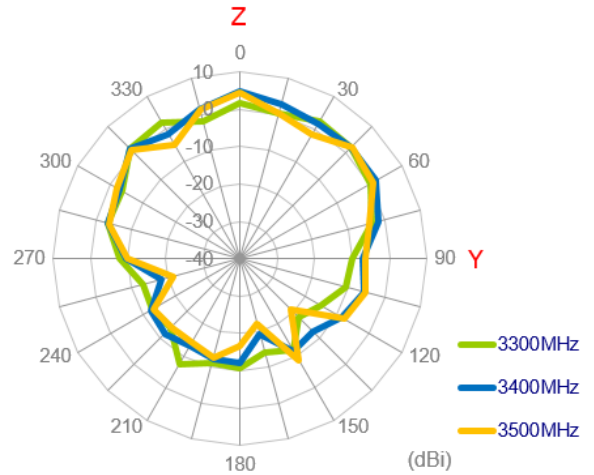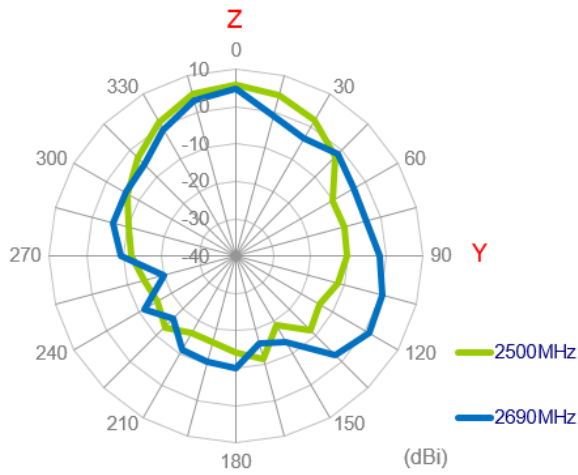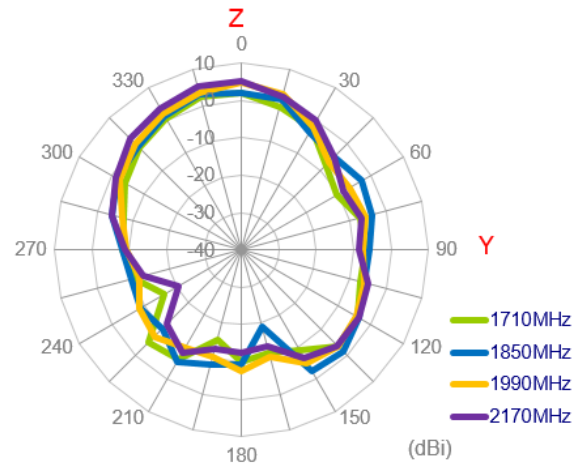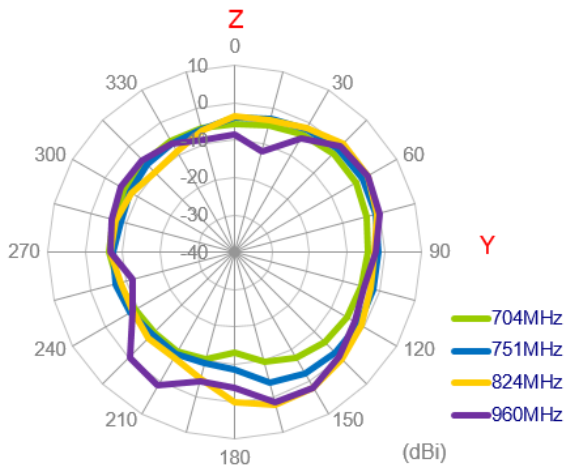





3.2.45. 3D Radiation Pattern (LTE_MIMO1 with 1M cable length on metal)

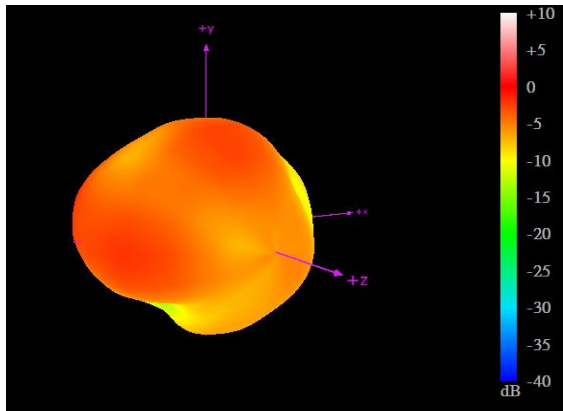


704MHz

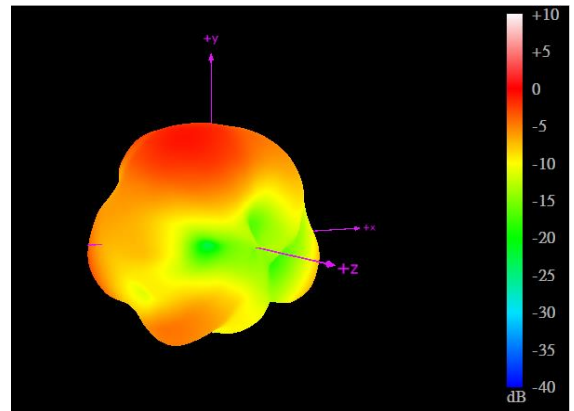


960MHz

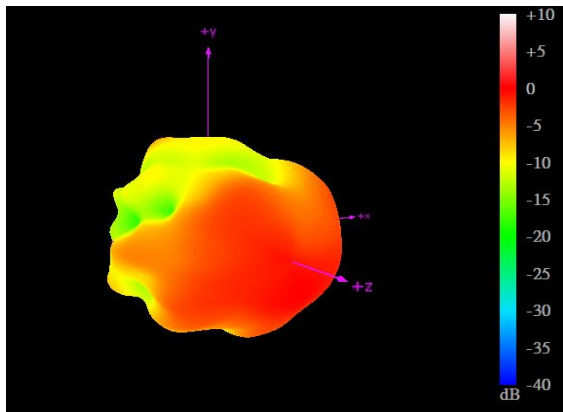


1710MHz

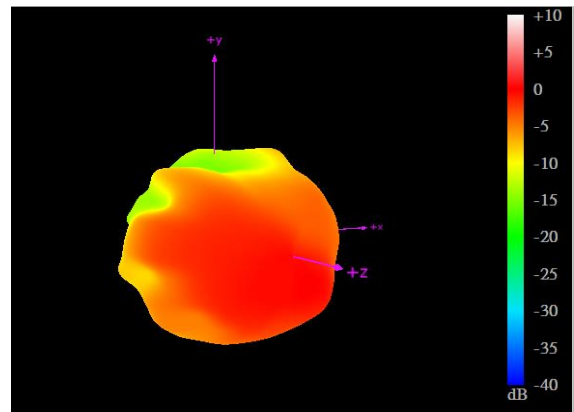

2170MHz

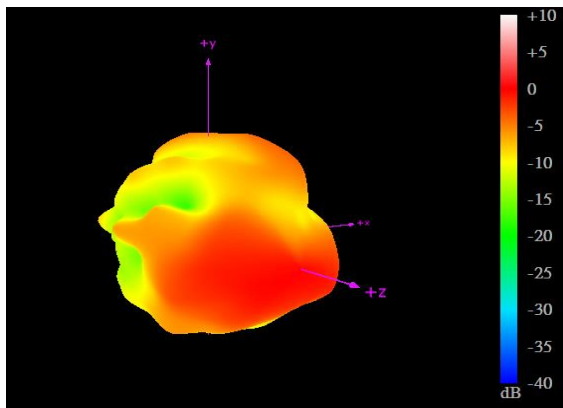

2690MHz




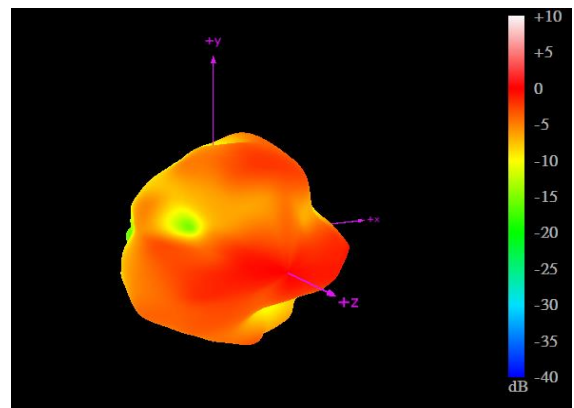


3500MHz







3.2.46. 2D Radiation Pattern (LTE_MIMO2 with 1M cable length on metal)

XY Plane

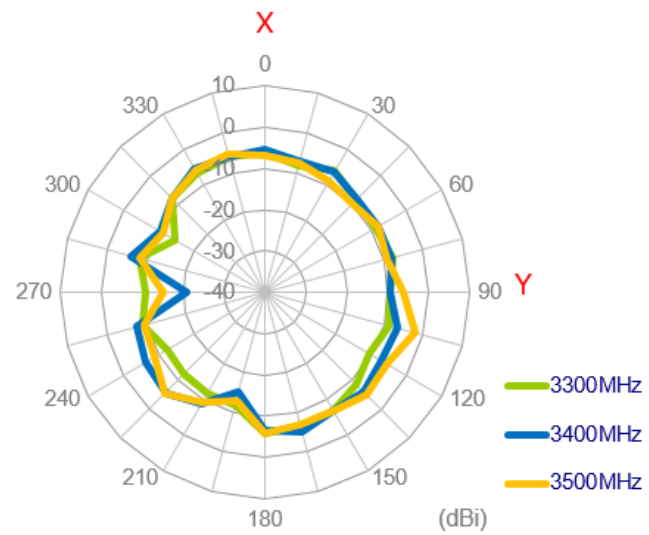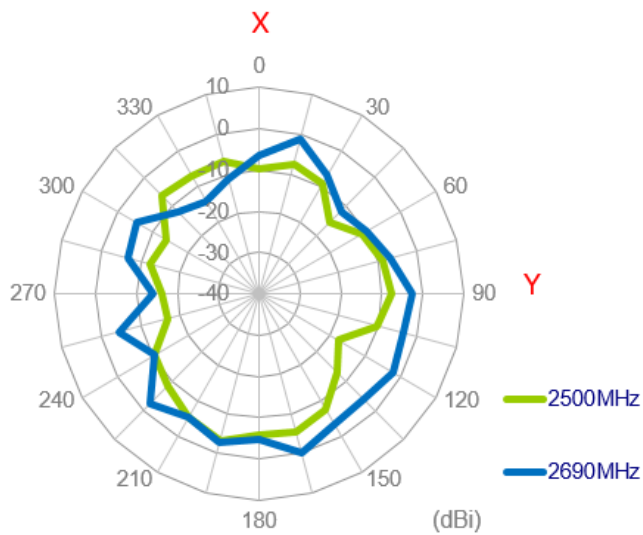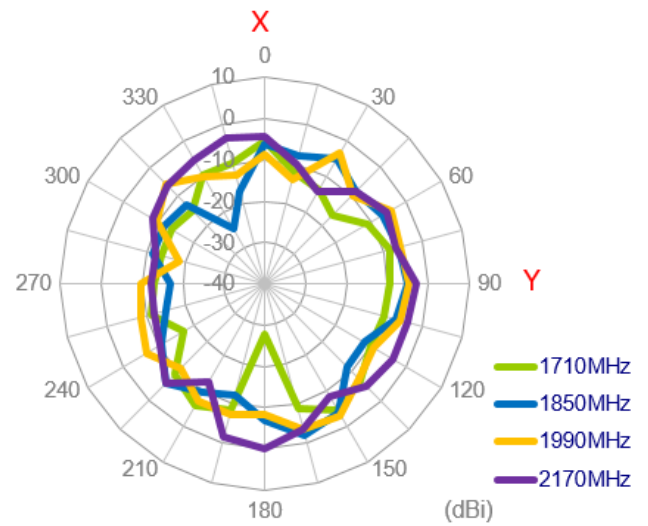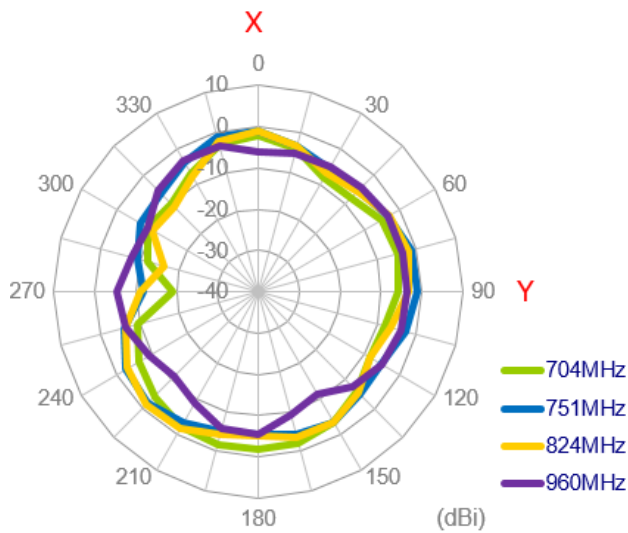







XZ Plane

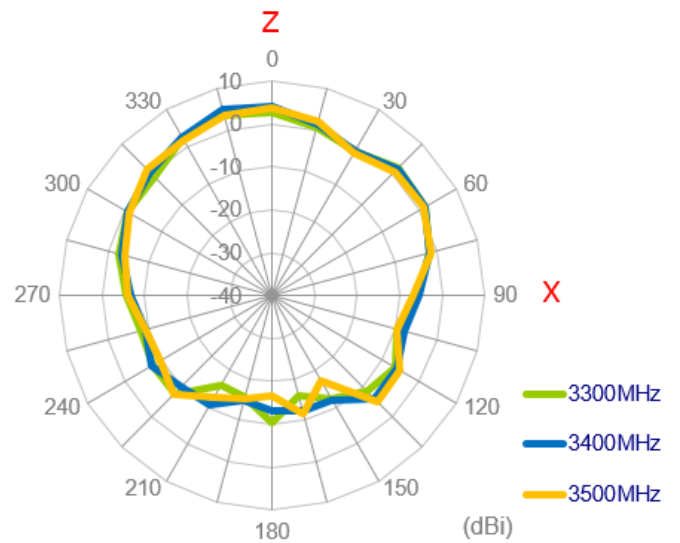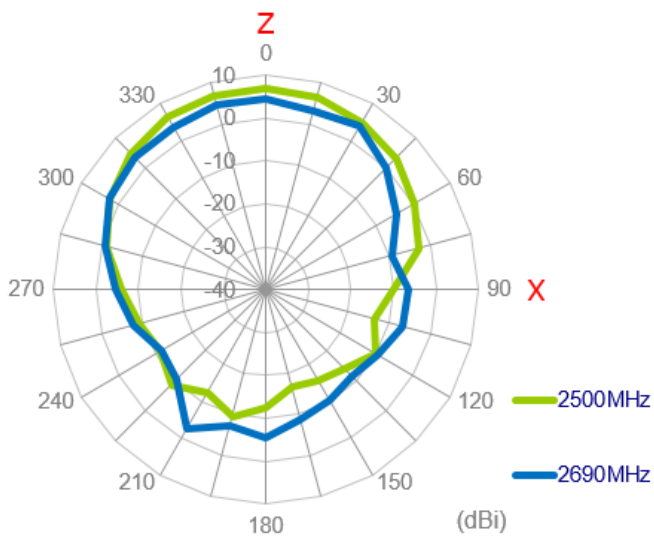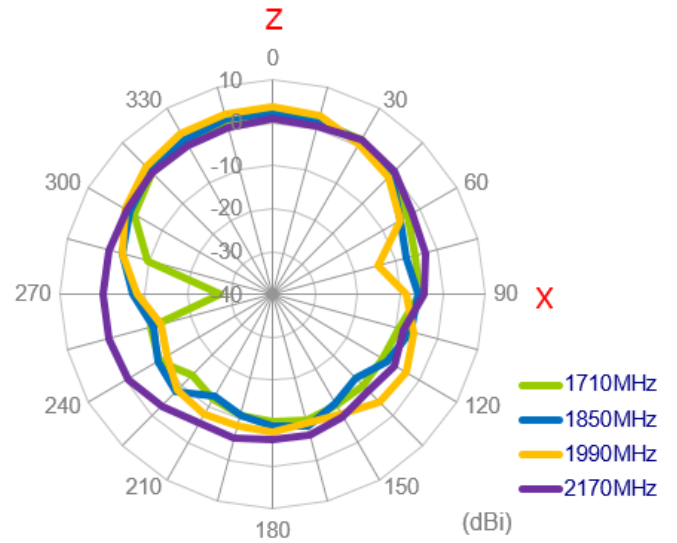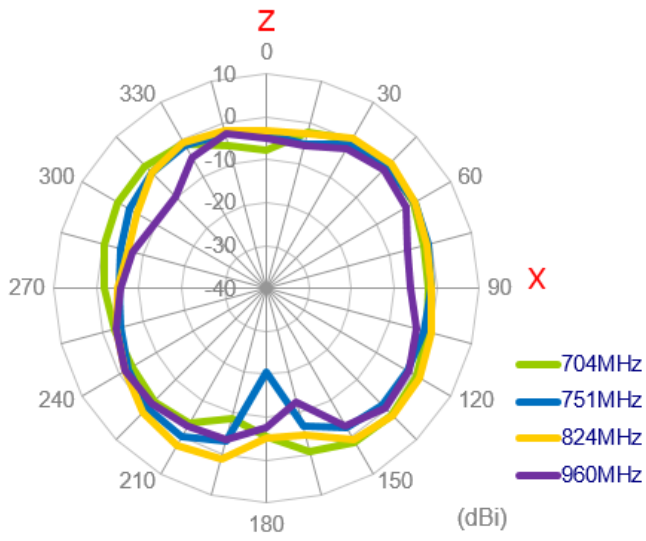

YZ Plane




TAOGLAS®

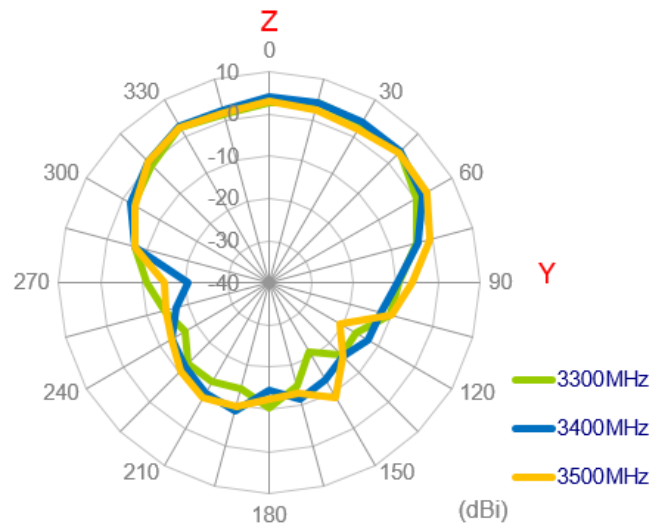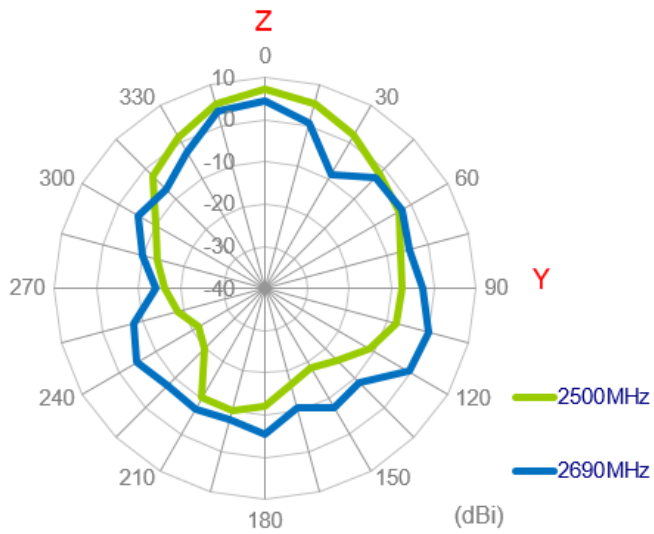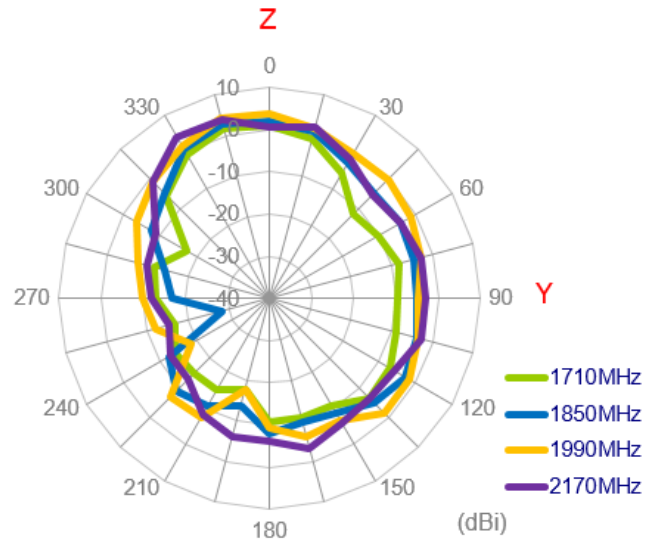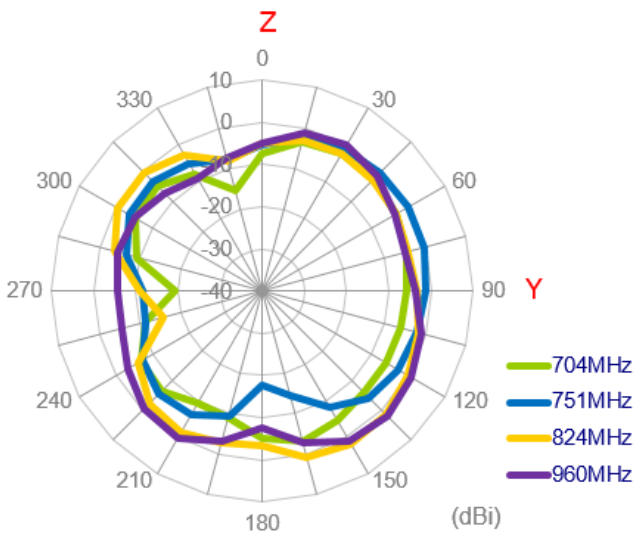





3.2.47. 3D Radiation Pattern (LTE_MIMO2 with 1M cable length on metal)

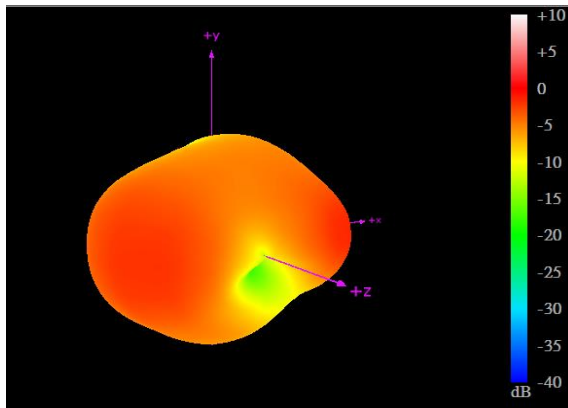


704MHz

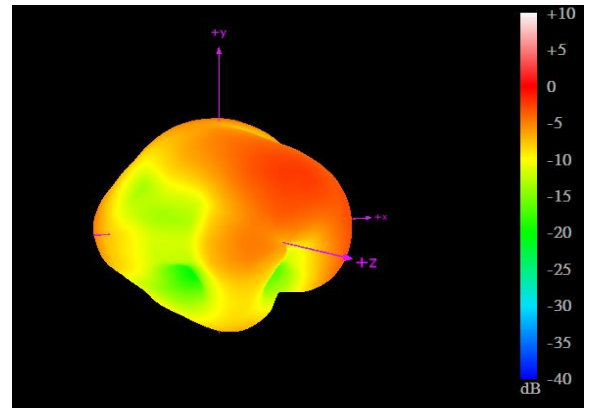


960MHz

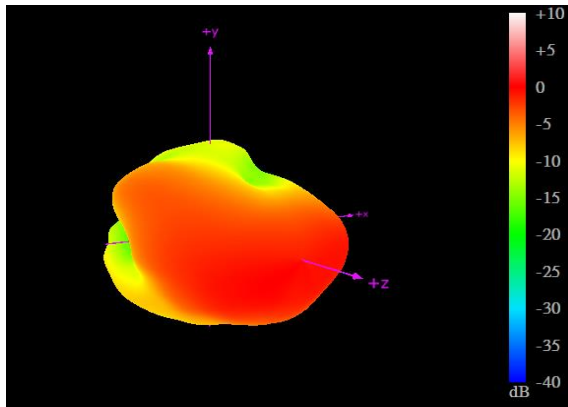


1710MHz

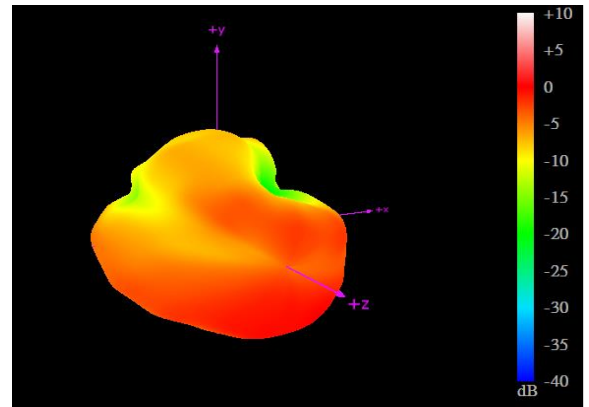

2170MHz

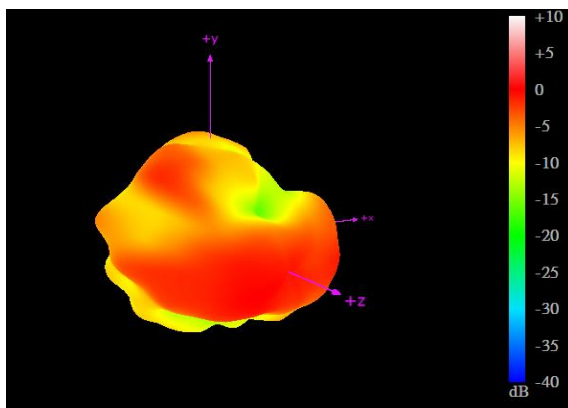

2690MHz


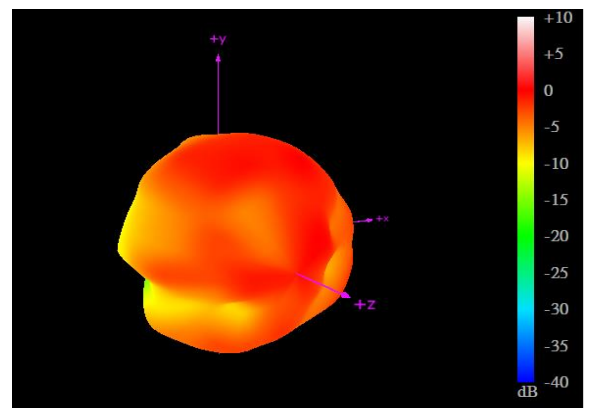


3500MHz





3.2.48. 2D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length on metal)



XY Plane

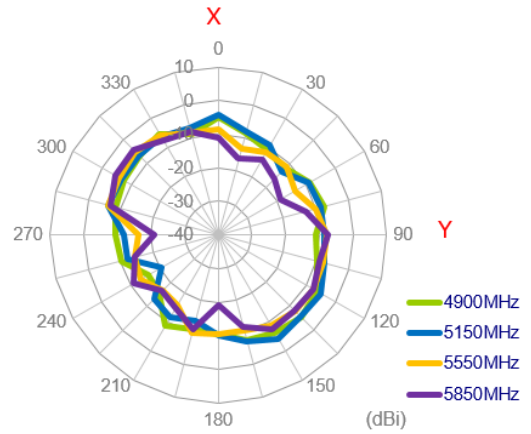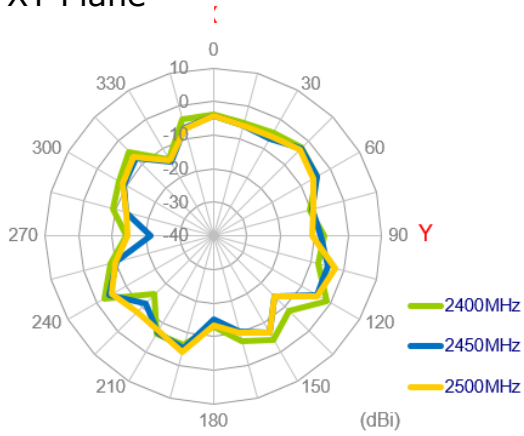


XZ Plane

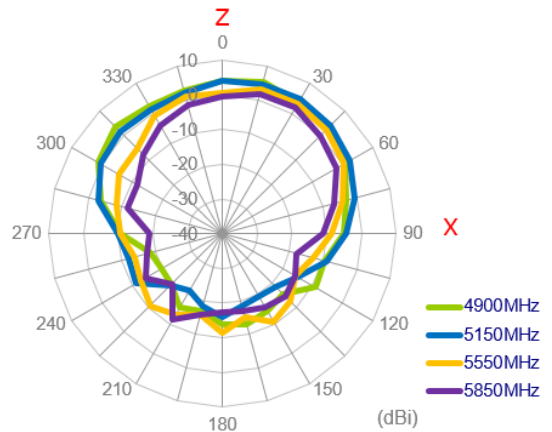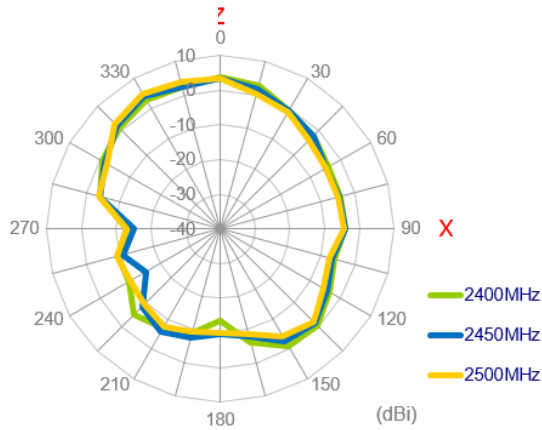


YZ Plane

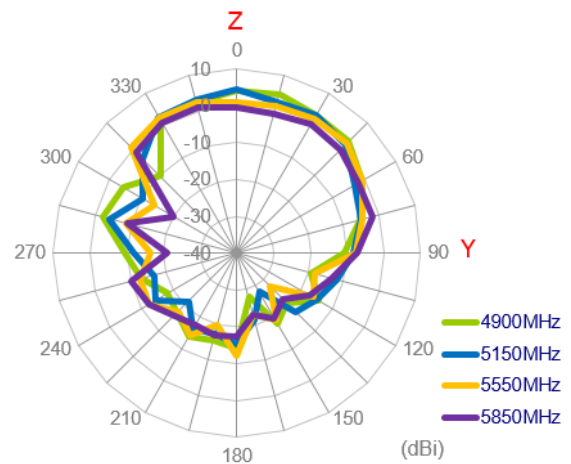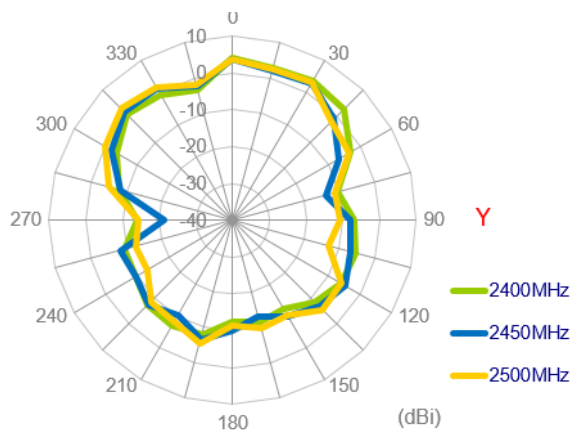

3.2.49. 3D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length on metal)

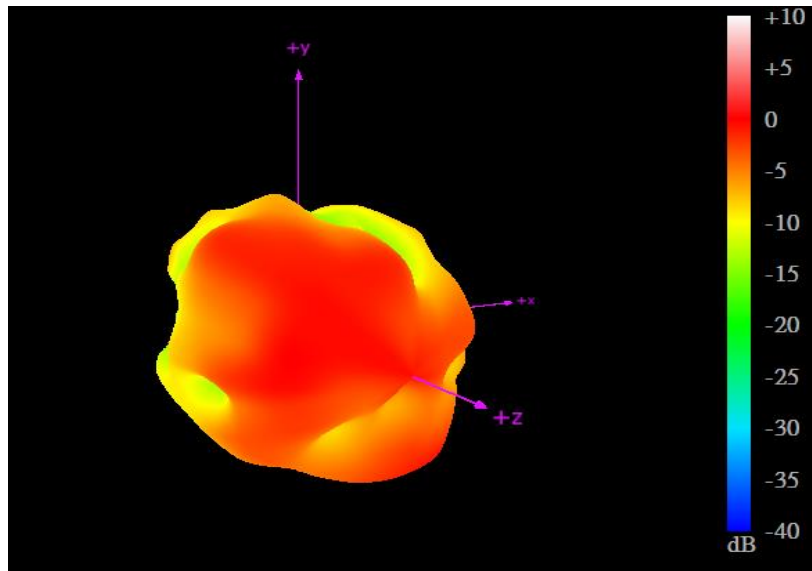



2450MHz

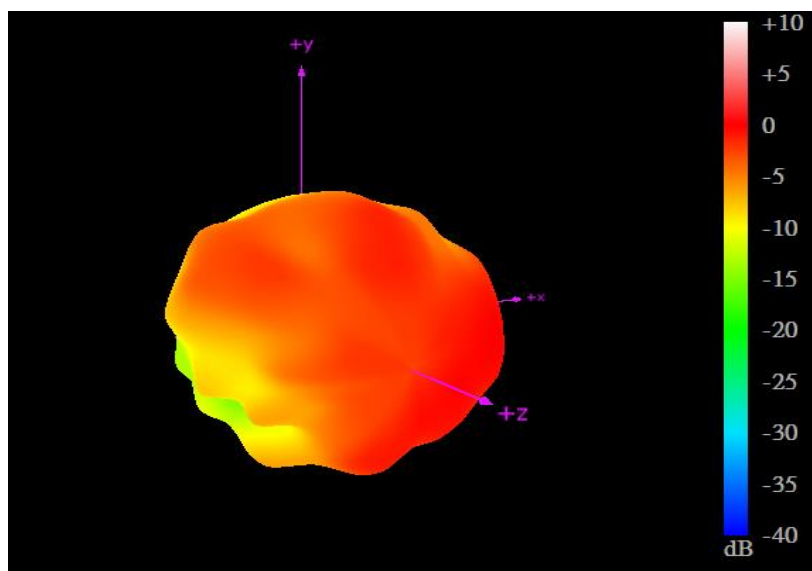



5550MHz

3.2.50. 2D Radiation Pattern (Wi-Fi_MIMO2 with 3M cable length on metal)



XY Plane

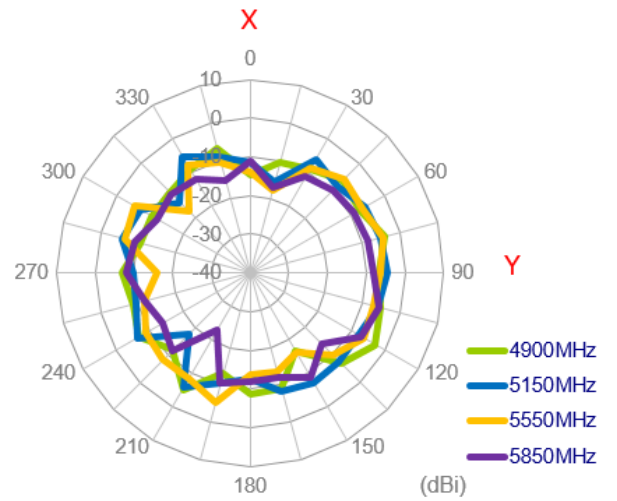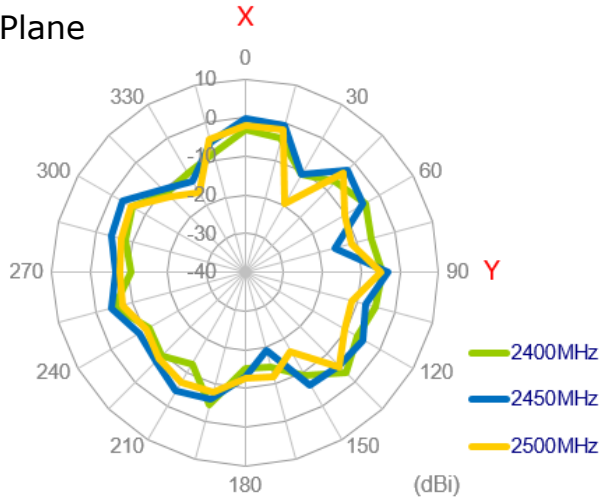


XZ Plane

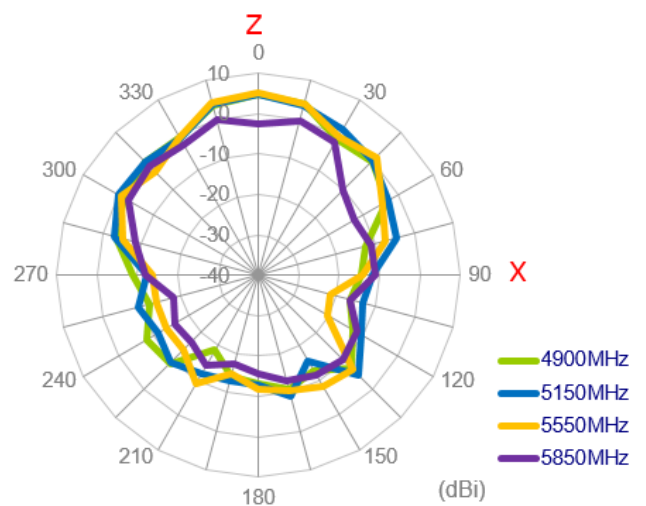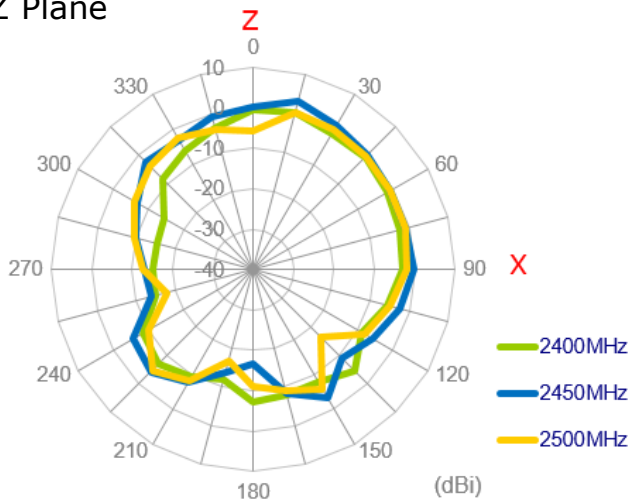


YZ Plane

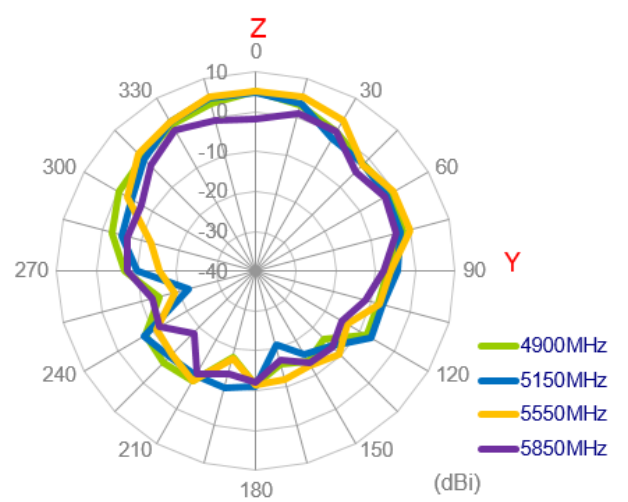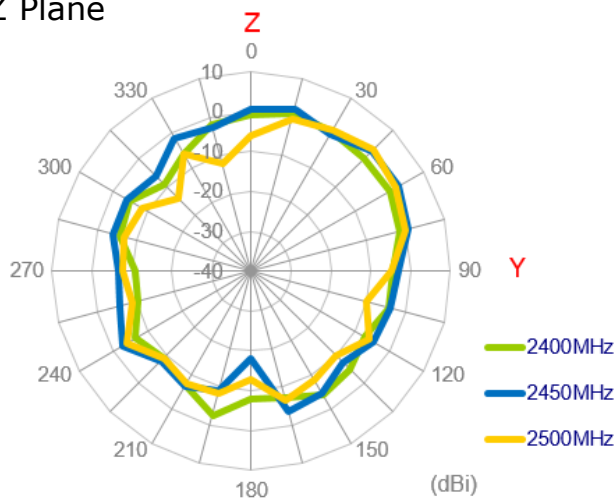

3.2.51. 3D Radiation Pattern (Wi-Fi_MIMO2 with 1M cable length on metal)

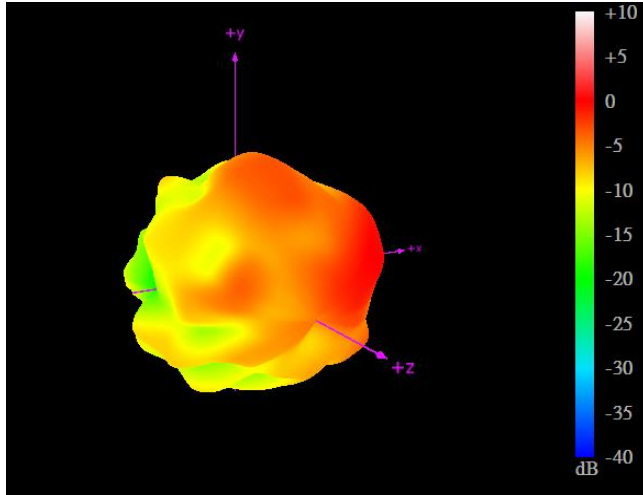


2450MHz

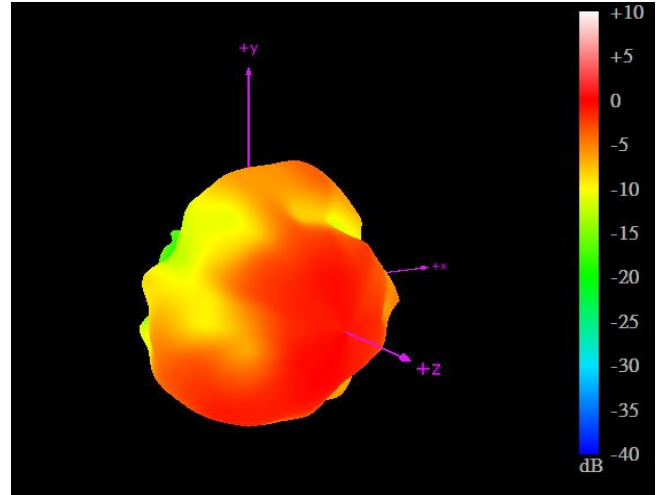

5550MHz





3.2.52. Test Setup for Antenna Radiation Pattern

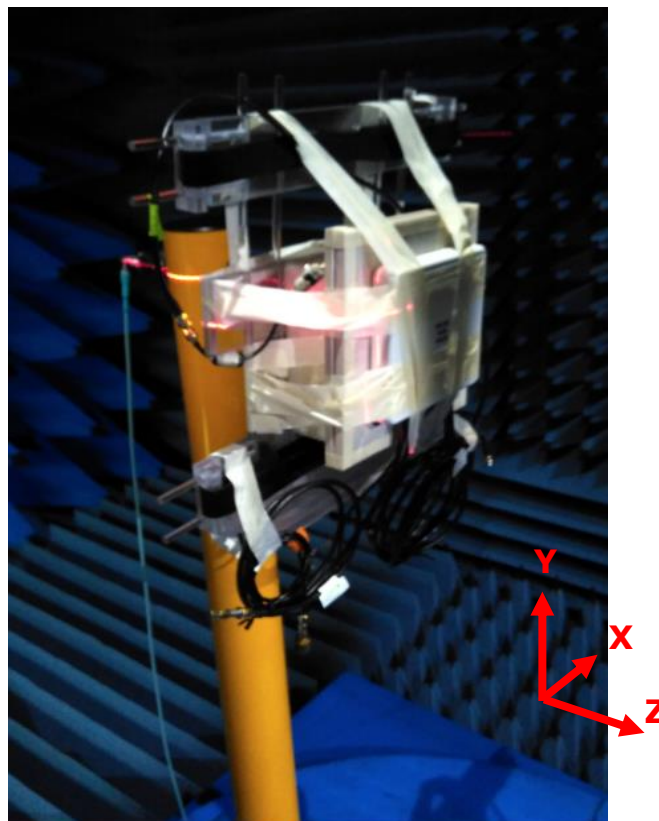

On the Wall





3.2.53. 2D Radiation Pattern (LTE_MIMO1 with 1M cable length on the wall)

XY Plane

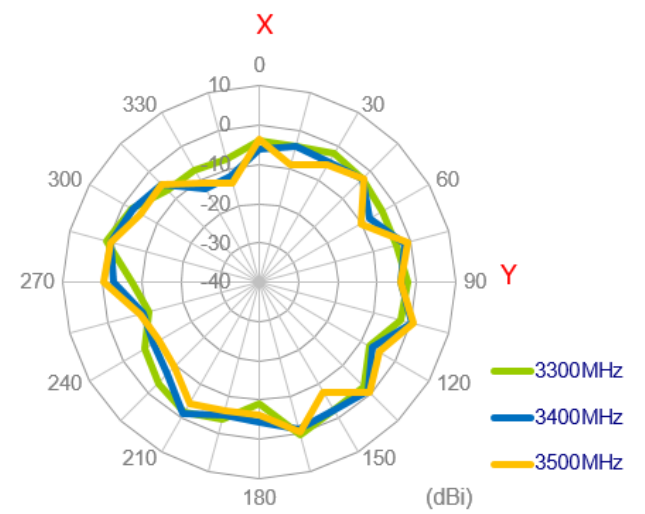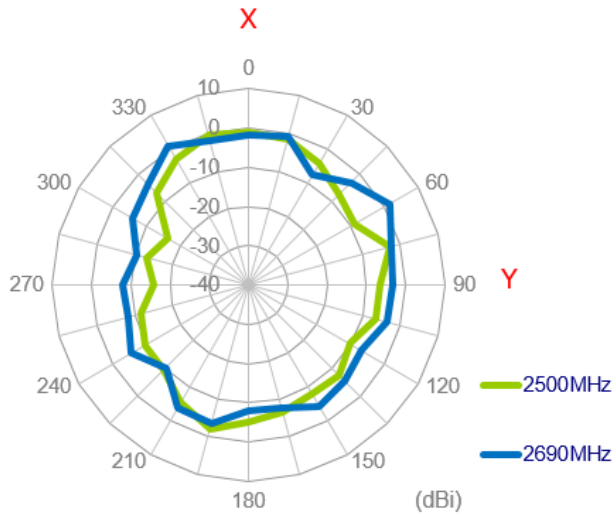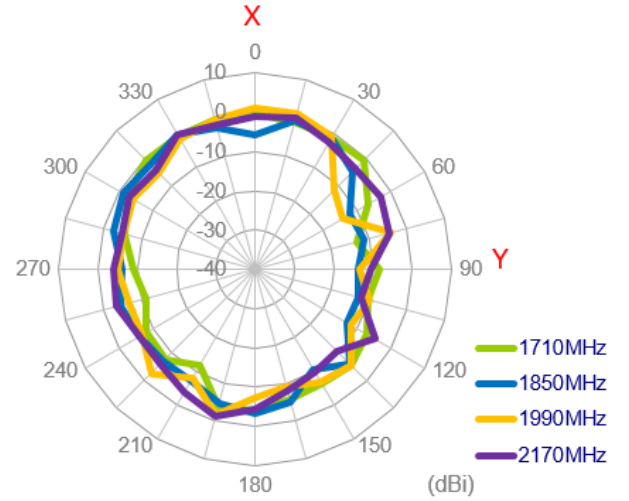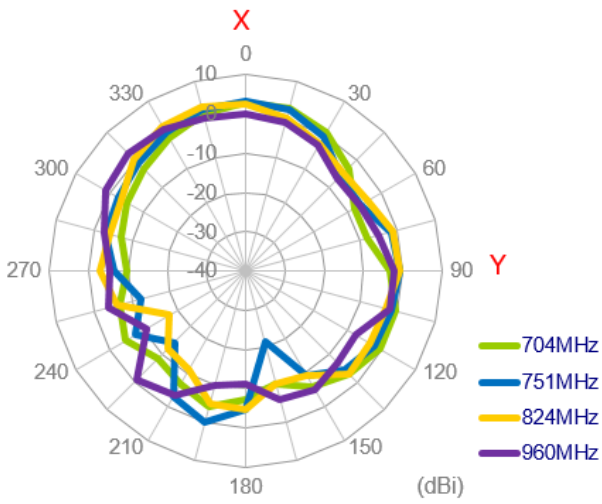







XZ Plane

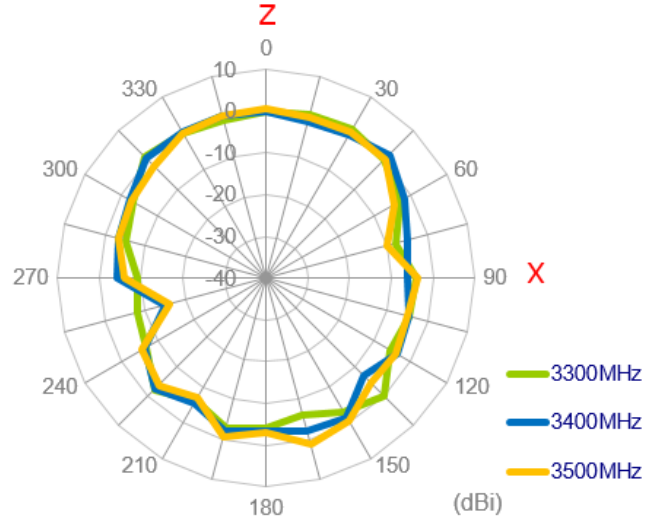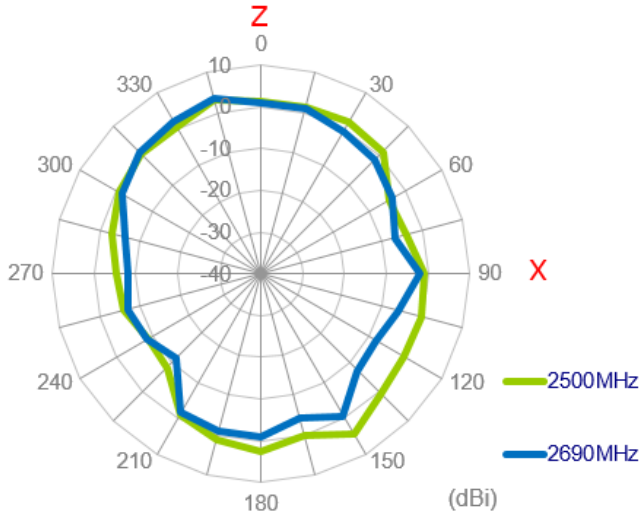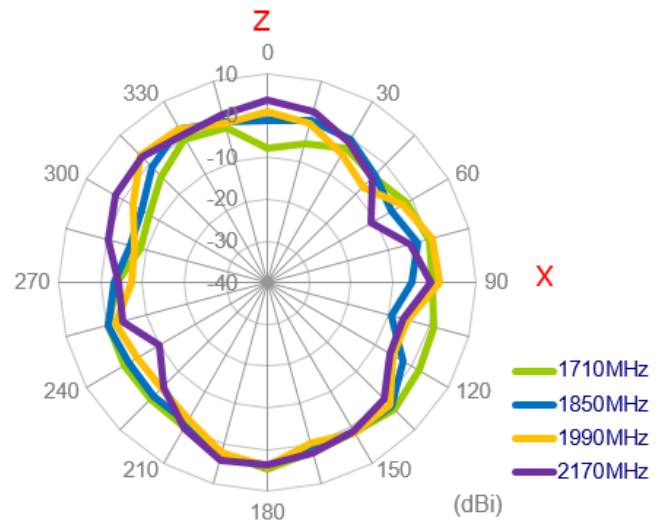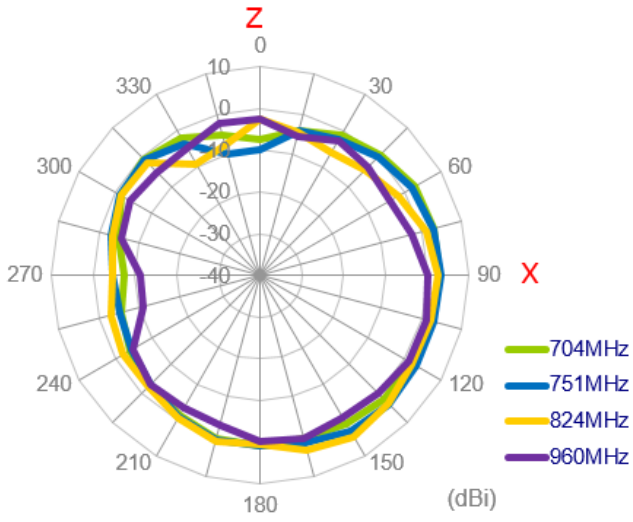




YZ Plane

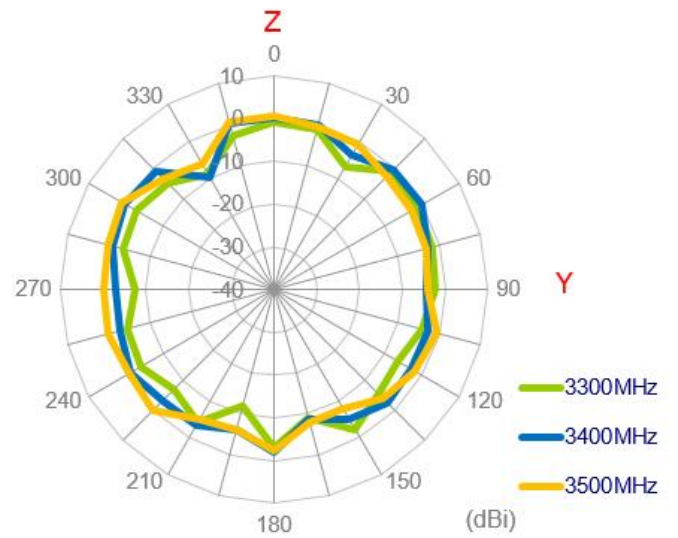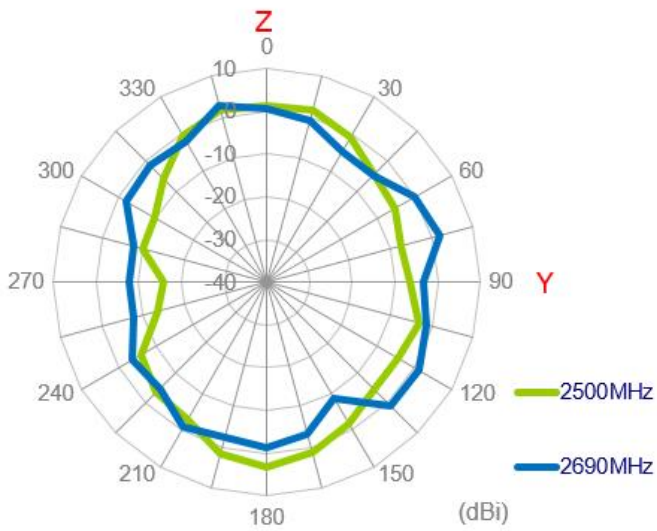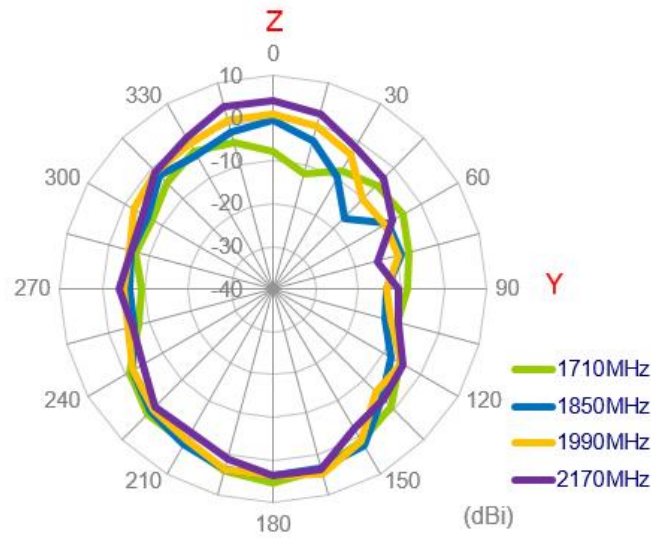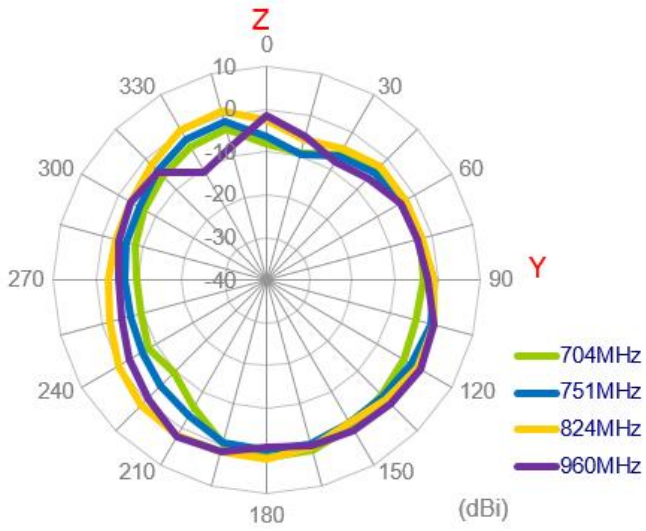





3.2.54. 3D Radiation Pattern (LTE_MIMO1 with 1M cable length on the wall)

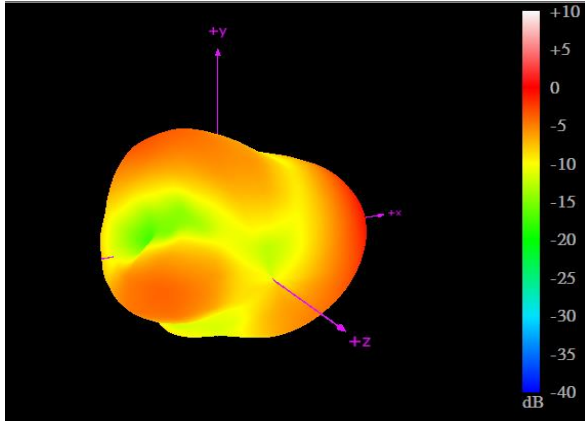


704MHz

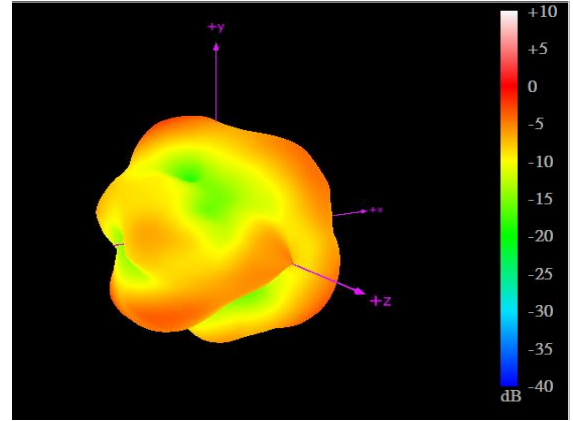


960MHz

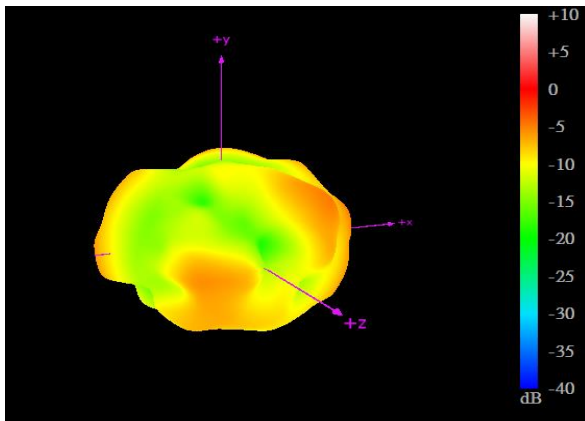


1710MHz

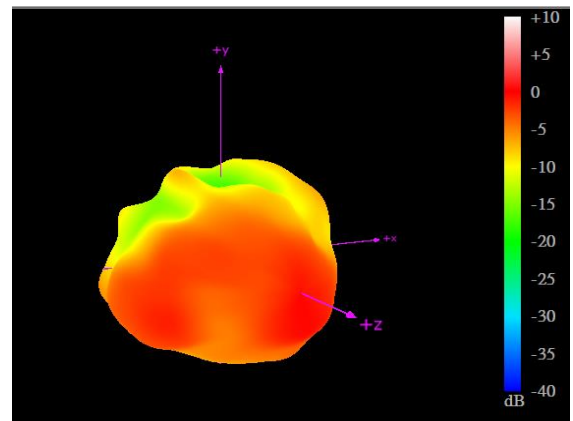

2170MHz

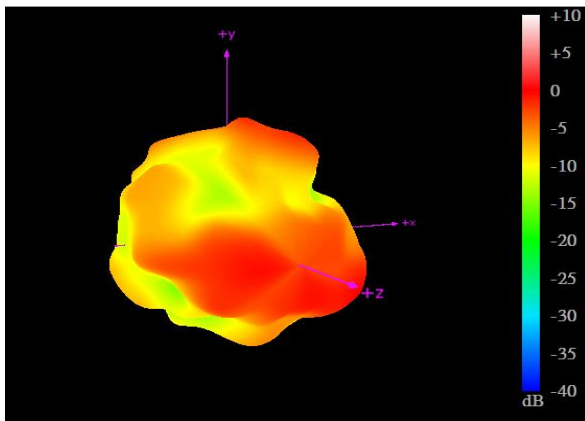

2690MHz




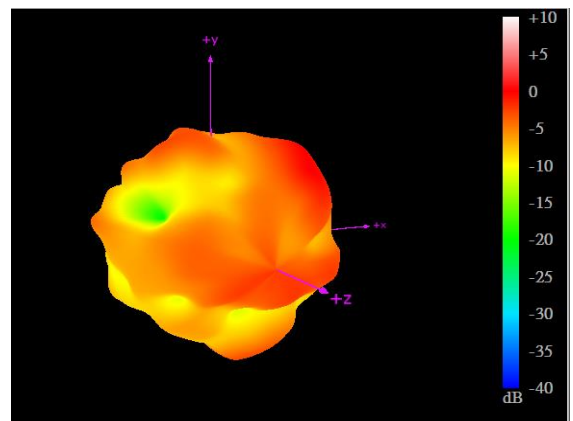


3500MHz







3.2.55. 2D Radiation Pattern (LTE_MIMO2 with 1M cable length on the wall)

XY Plane

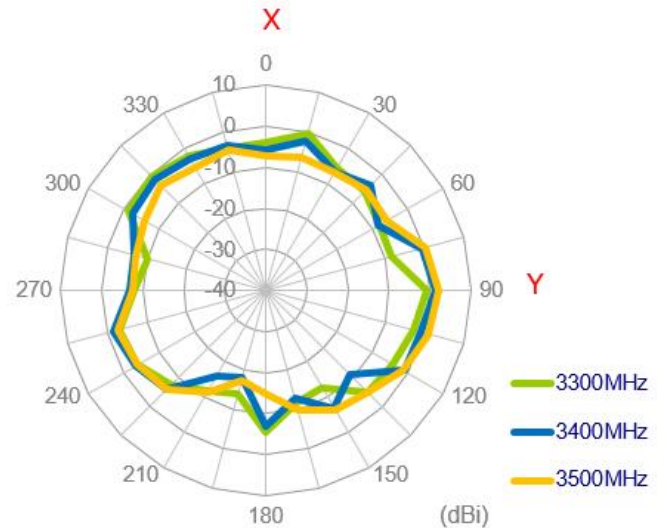
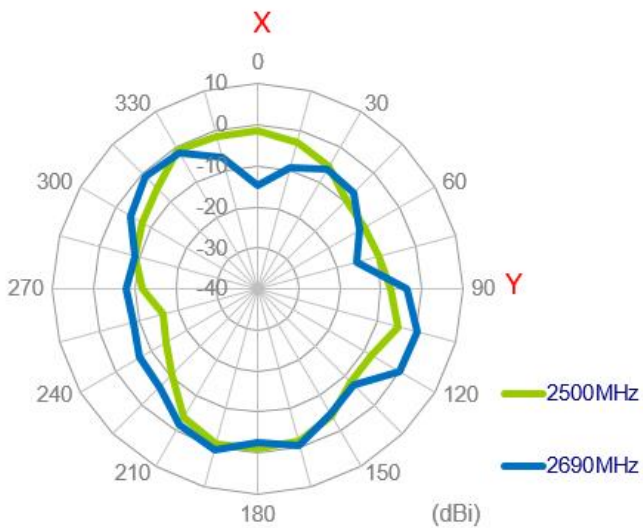
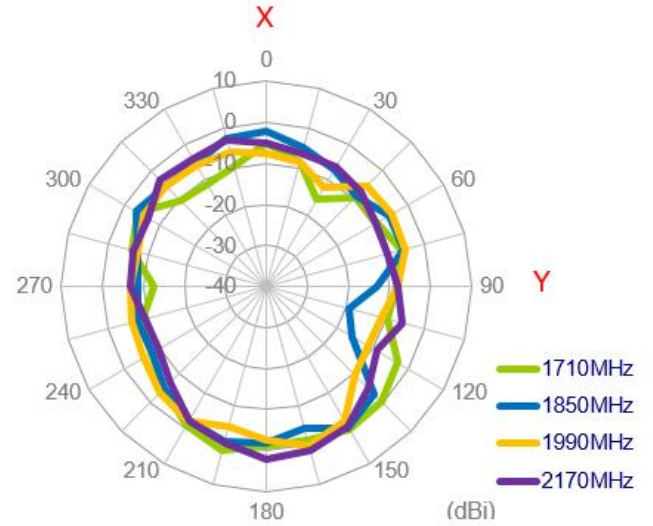
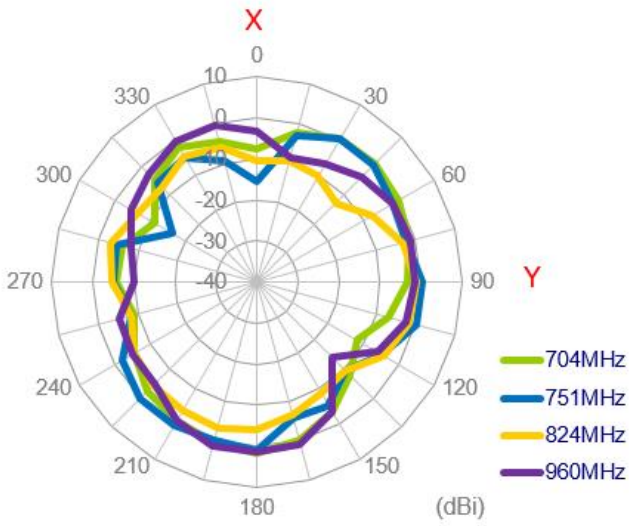


XZ Plane

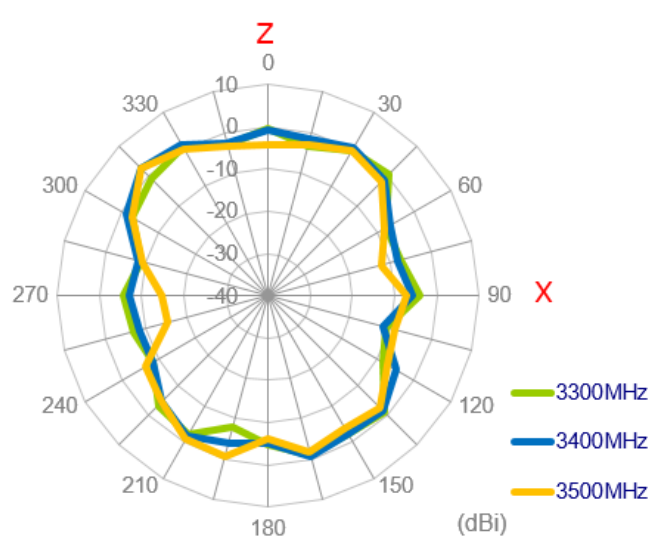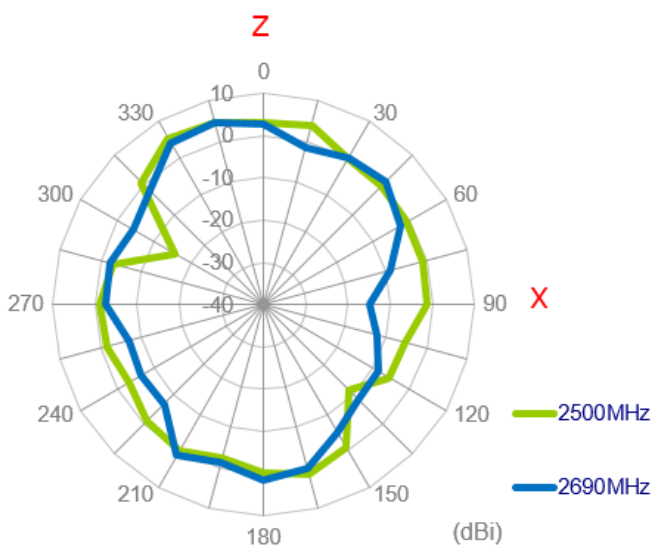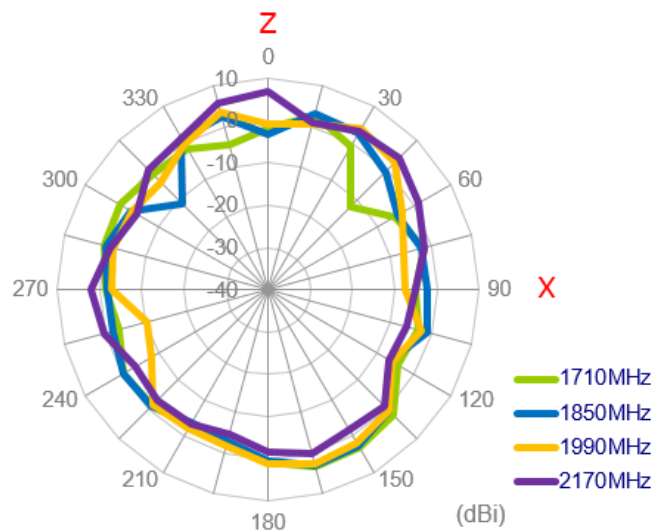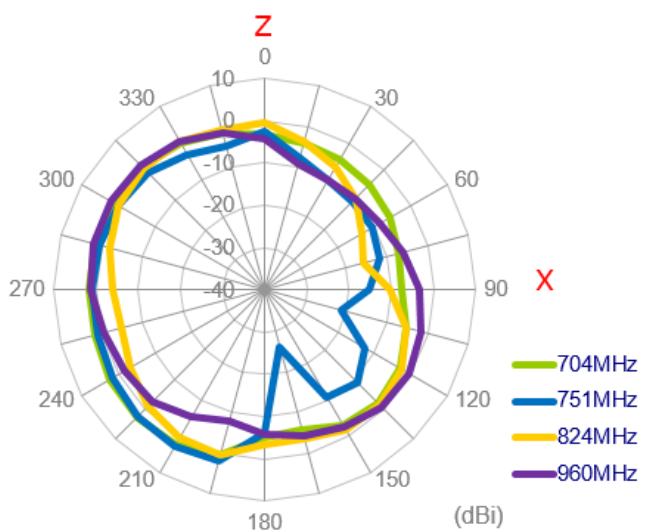




YZ Plane

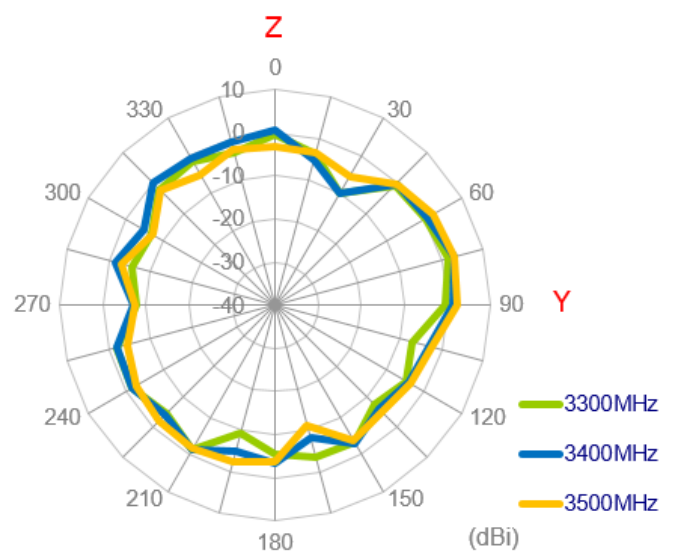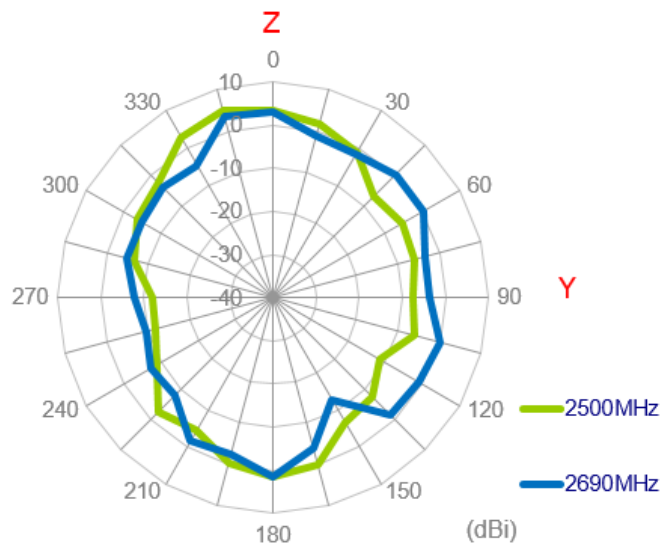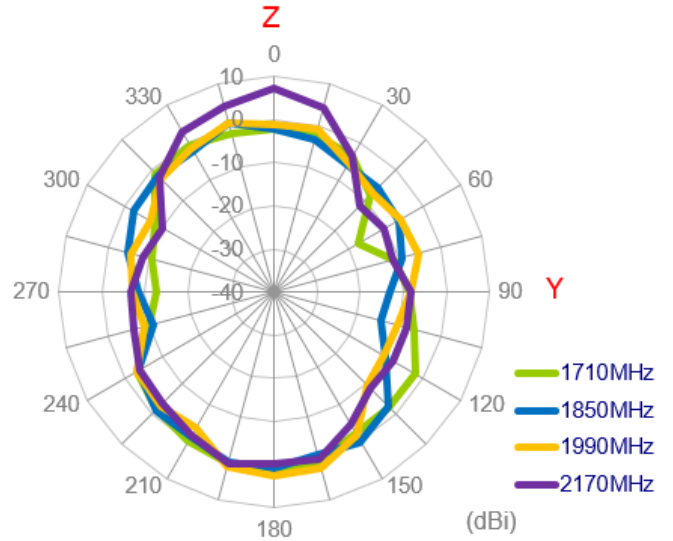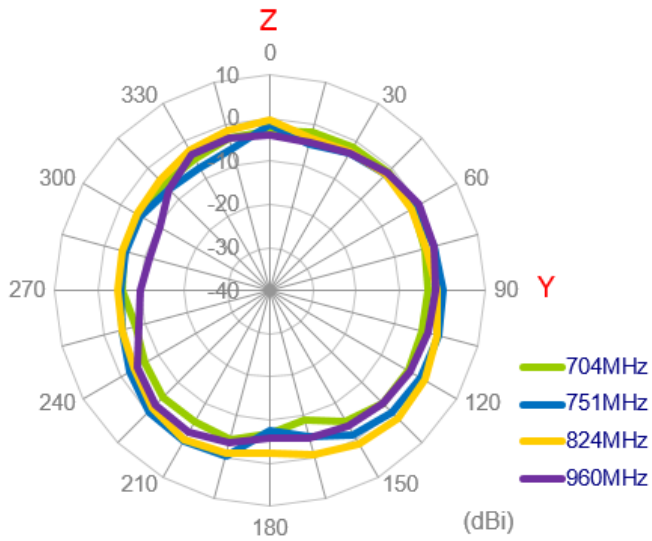





3.2.56. 3D Radiation Pattern (LTE_MIMO2 with 1M cable length on the wall)

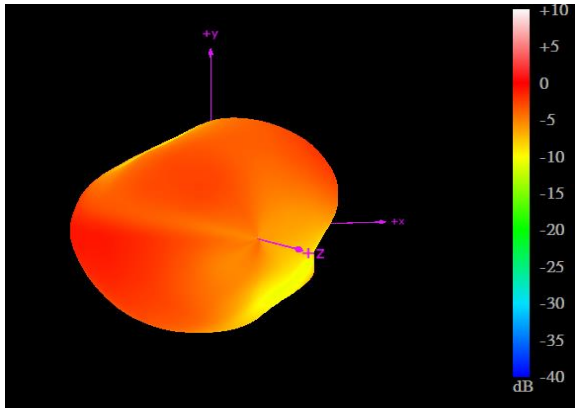


704MHz

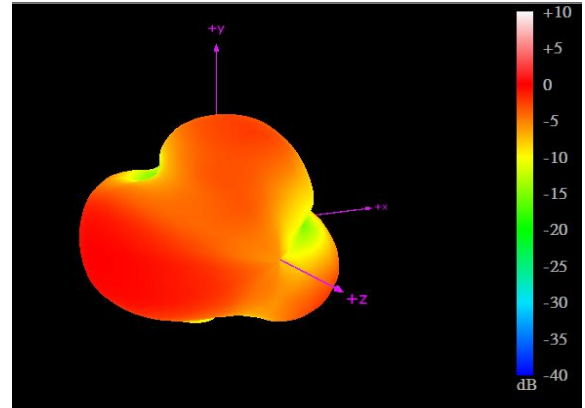


960MHz

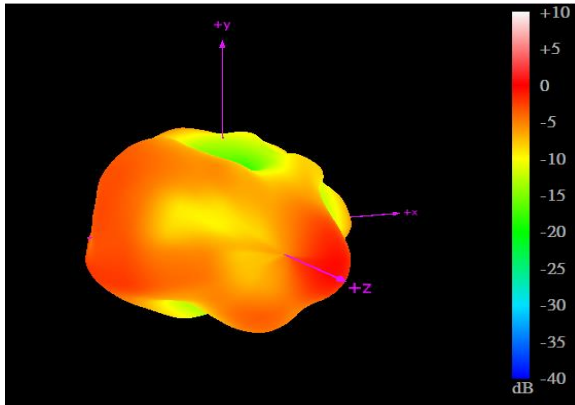


1710MHz

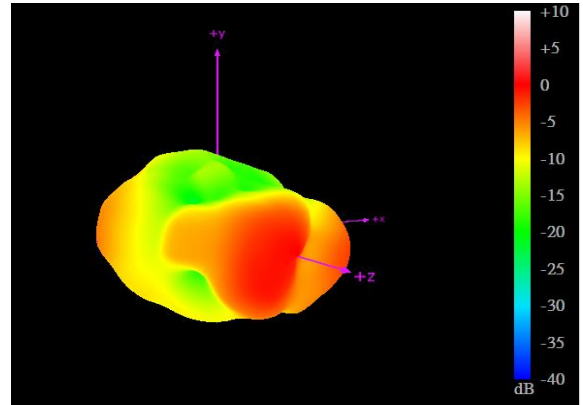

2170MHz

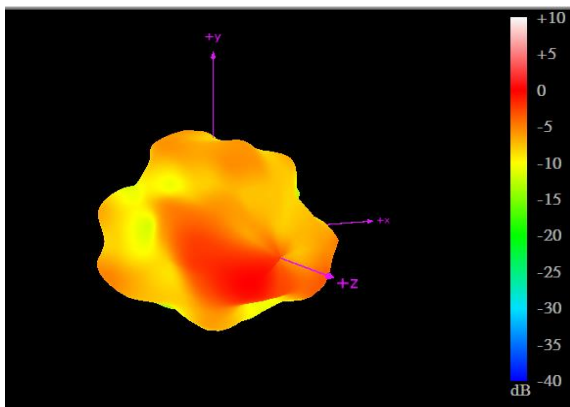



2690MHz

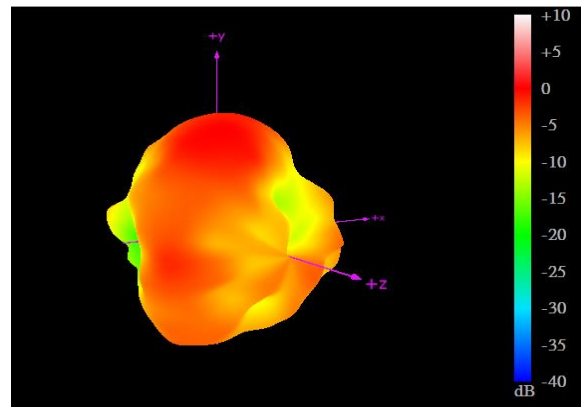



3500MHz

3.2.57. 2D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length in free space)



XY Plane

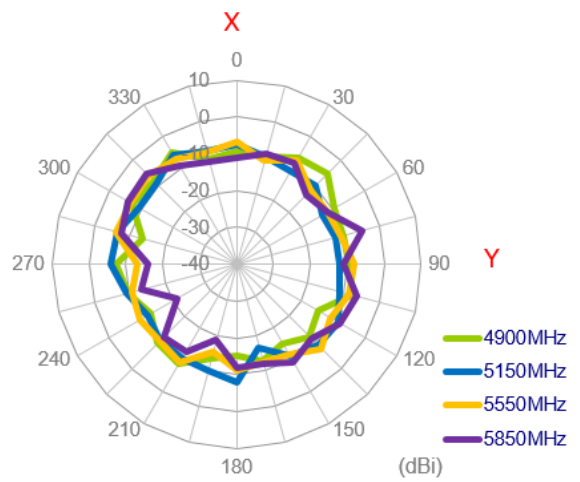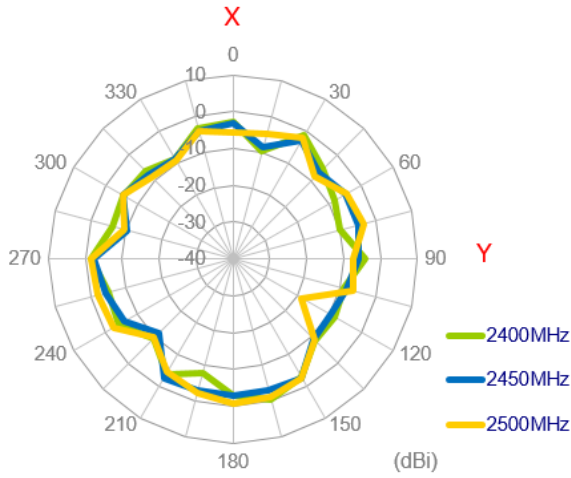


XZ Plane

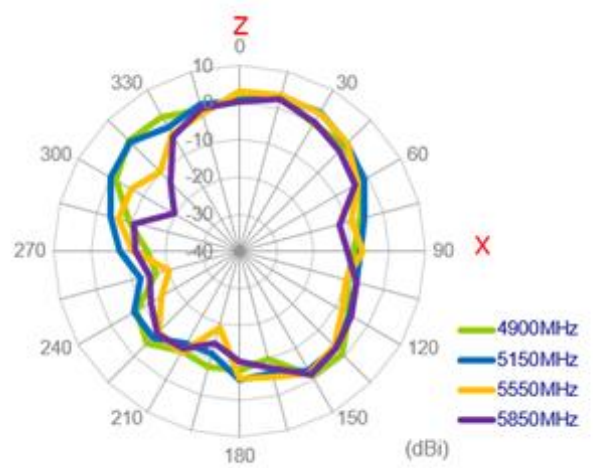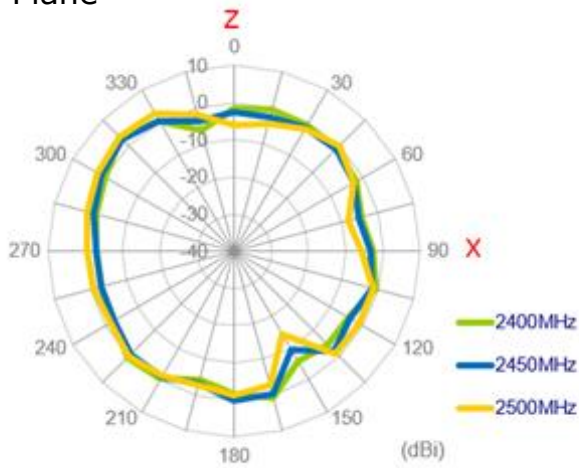


YZ Plane

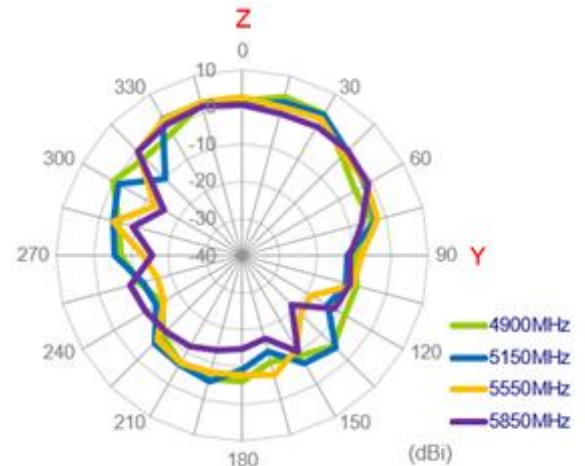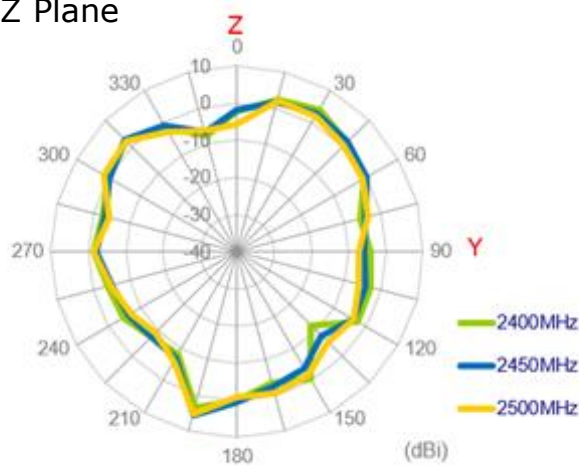

3.2.58. 3D Radiation Pattern (Wi-Fi_MIMO1 with 1M cable length in free space)

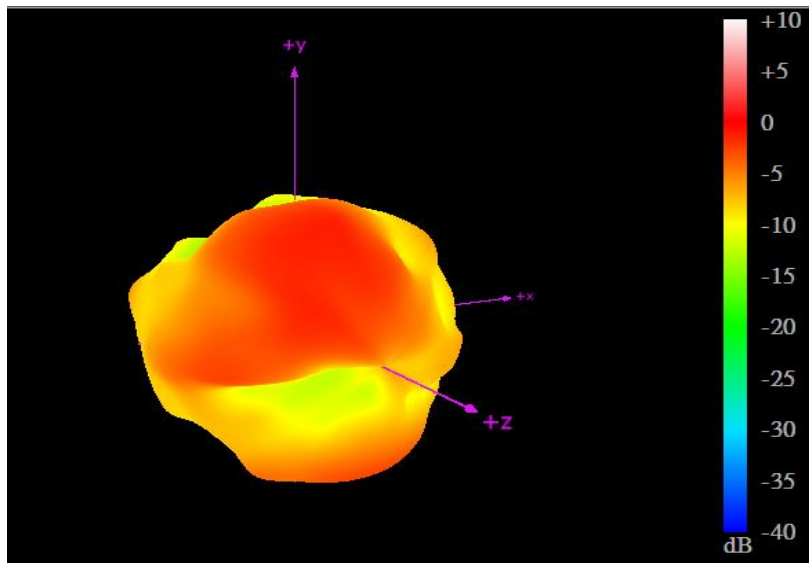



2450MHz

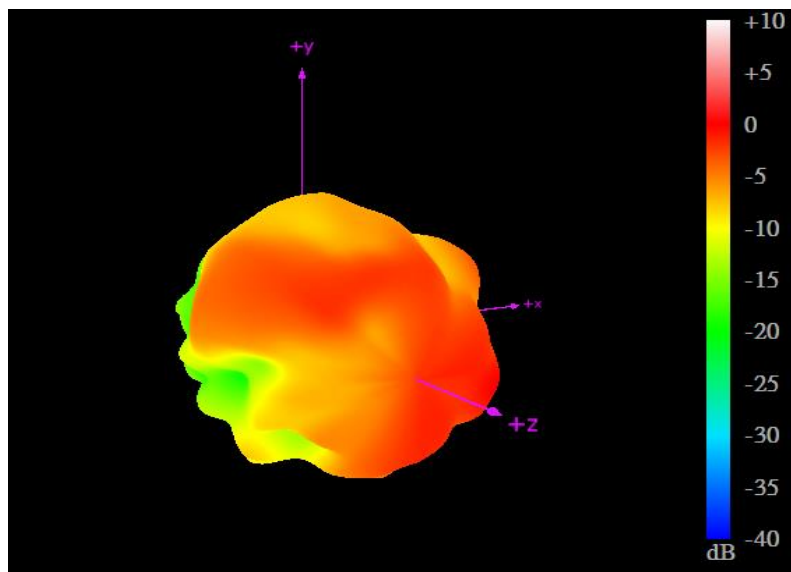



5550MHz

3.2.59. 2D Radiation Pattern (Wi-Fi_MIMO2 with 3M cable length in free space)



XY Plane

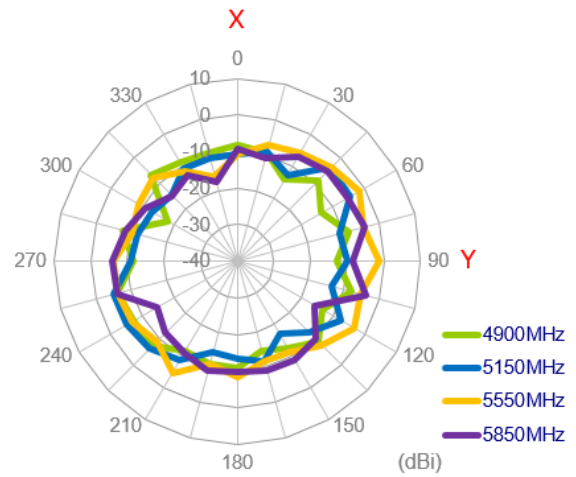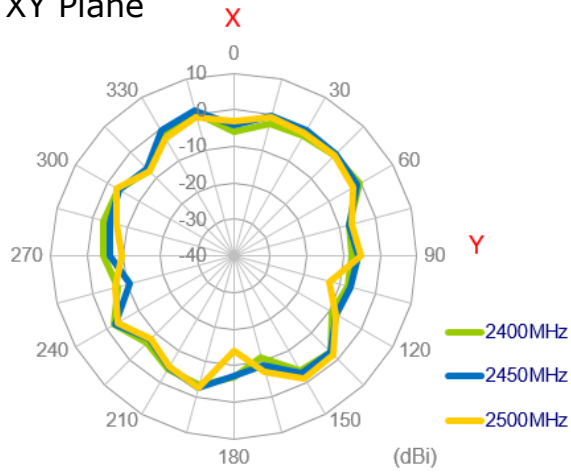


XZ Plane

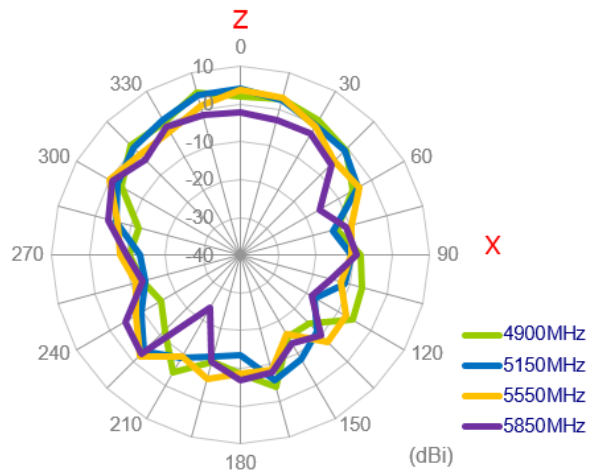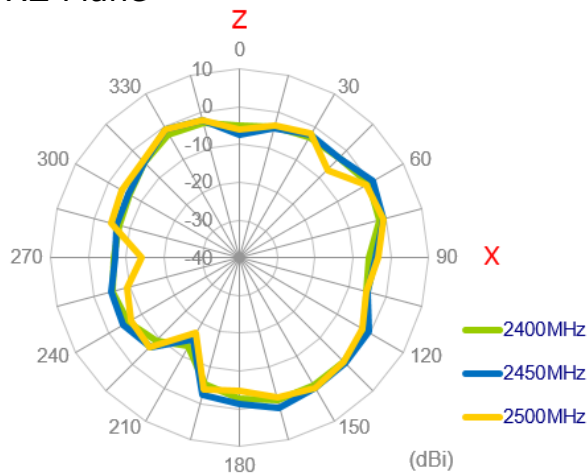


YZ Plane

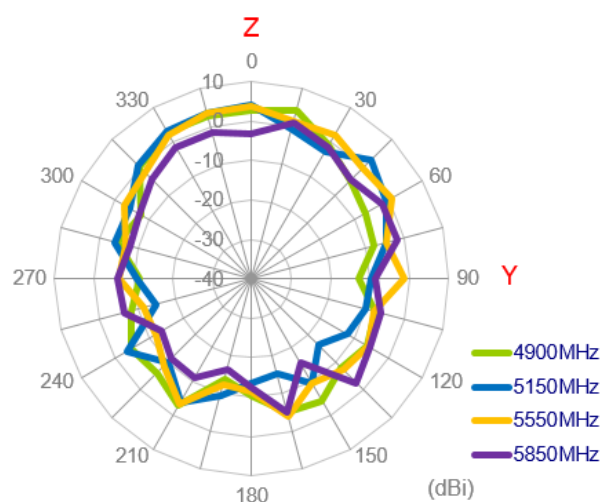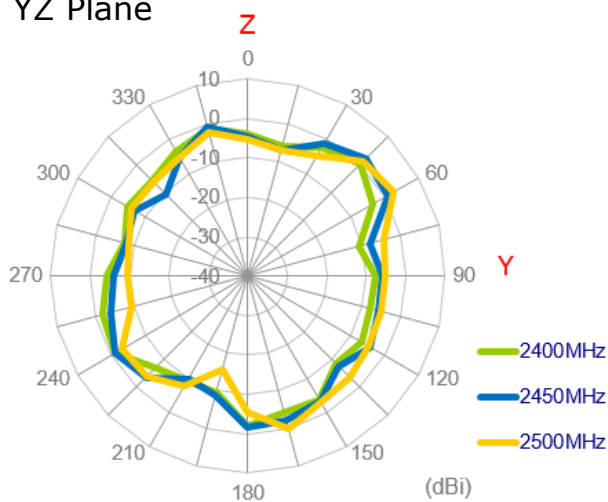

3.2.60. 3D Radiation Pattern (Wi-Fi_MIMO2 with 1M cable length in free space)

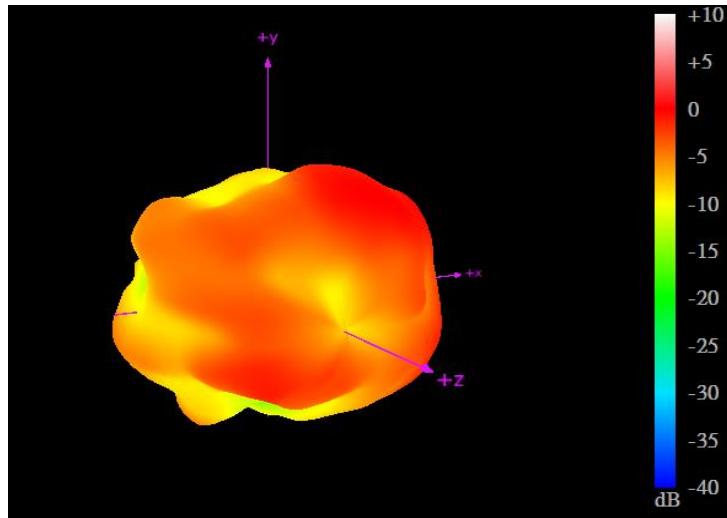


2450MHz

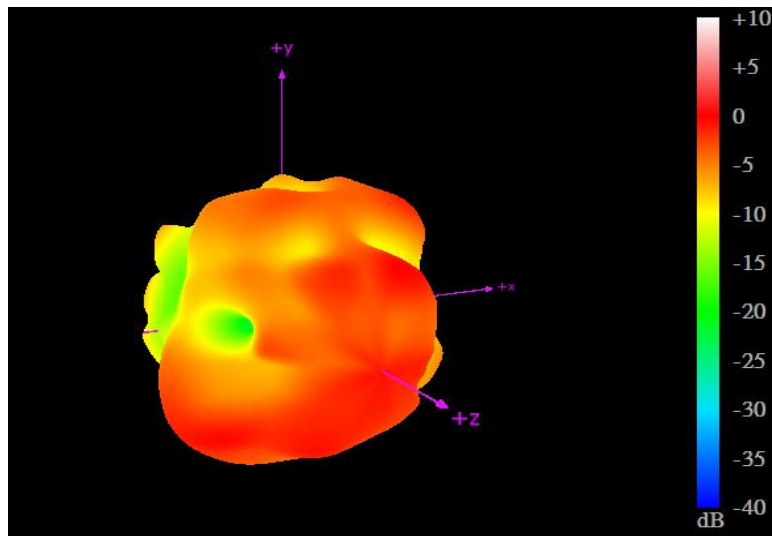

5550MHz




4. Mechanical Drawing (Unit: mm)

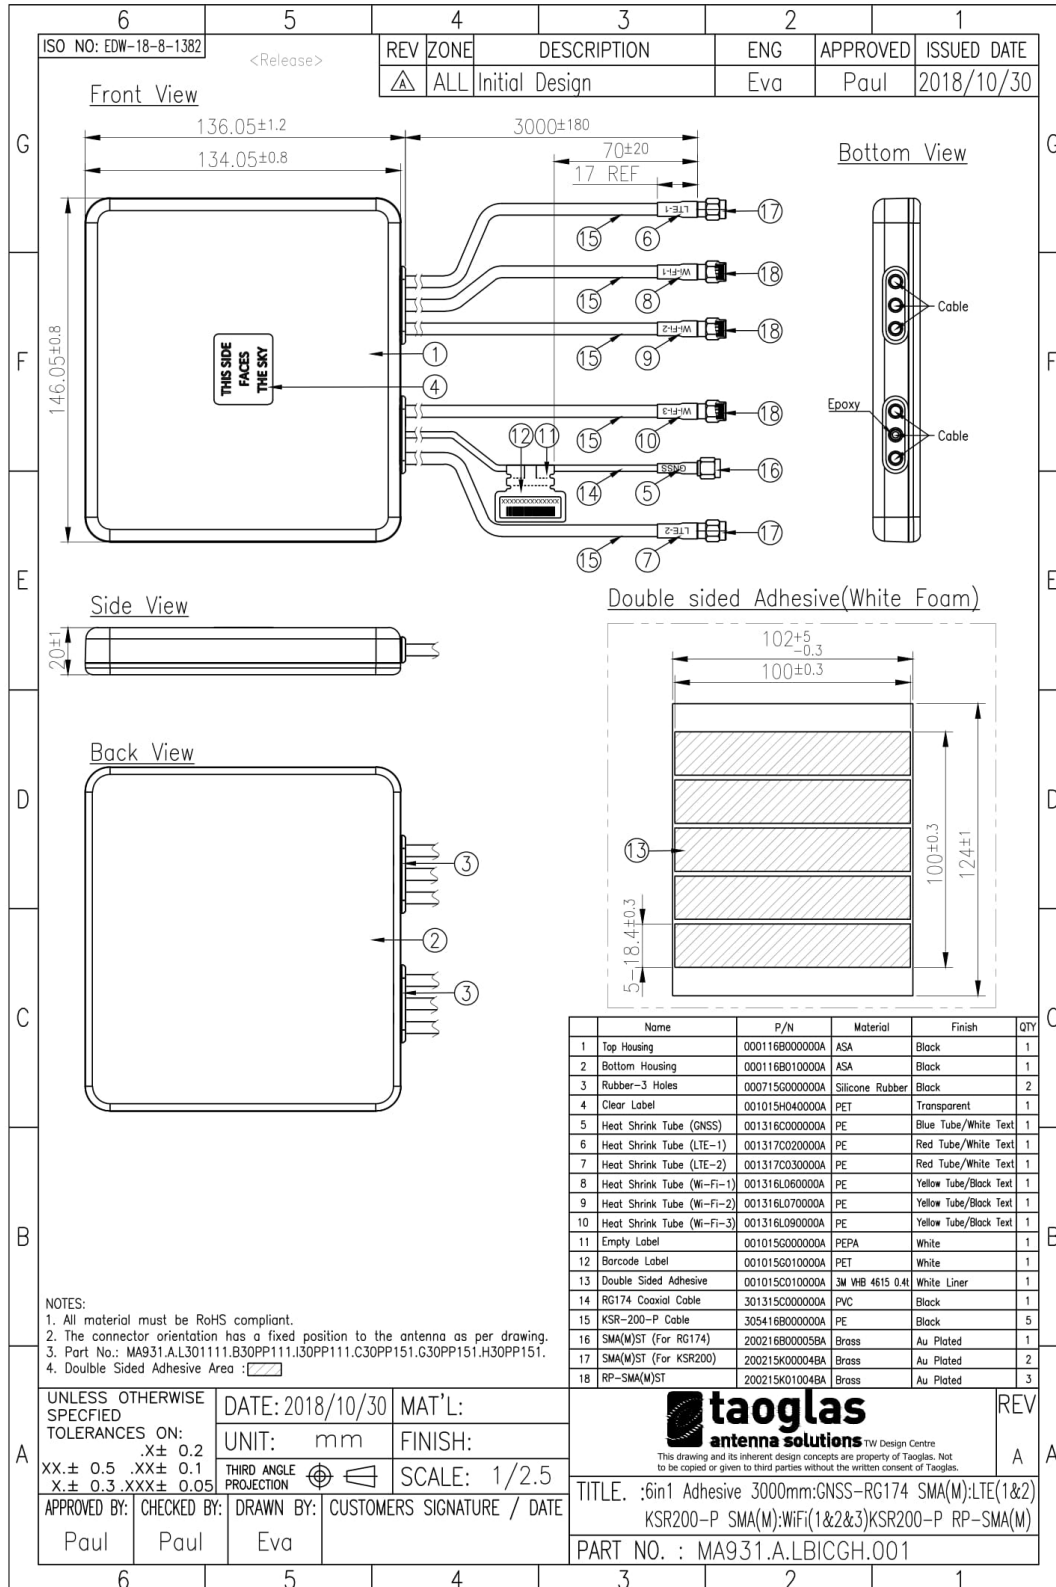




5. Packaging


1 No. MA950.A.LBICG.005 per small box
Box Dimensions - 260 x 235 x 105mm
Weight - 0.71Kg

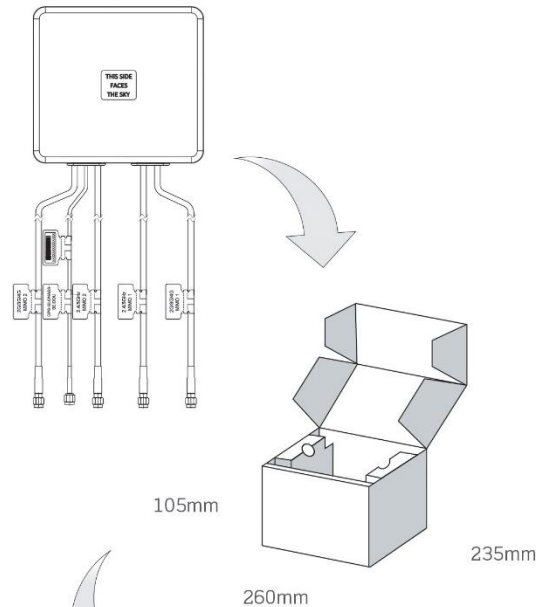

1 Outer Carton
Carton Dimensions - 540 x 490 x 240mm
8 pcs MA950.A.LBICG.005 per carton
Weight - 6.3Kg

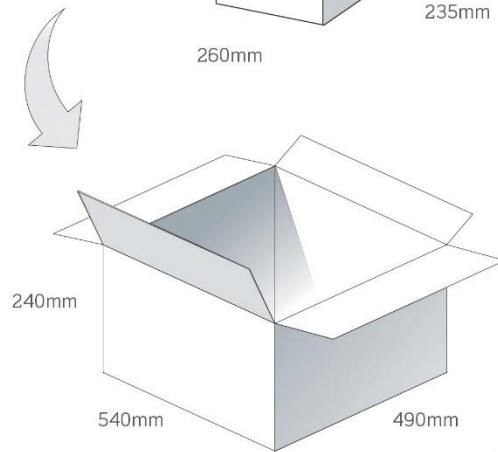

Pallet Dimensions 1200*1000*1400mm
20 Cartons per Pallet
4 Cartons per layer
5 Layers

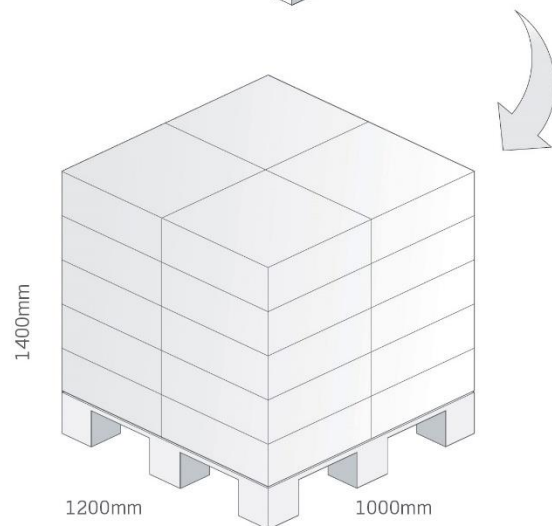


6. Application Note


The MA931 antenna performance with different cable lengths is shown below.

6.1. In free space (LTE)


6.1.1. Return Loss (LTE_MIMO_1)

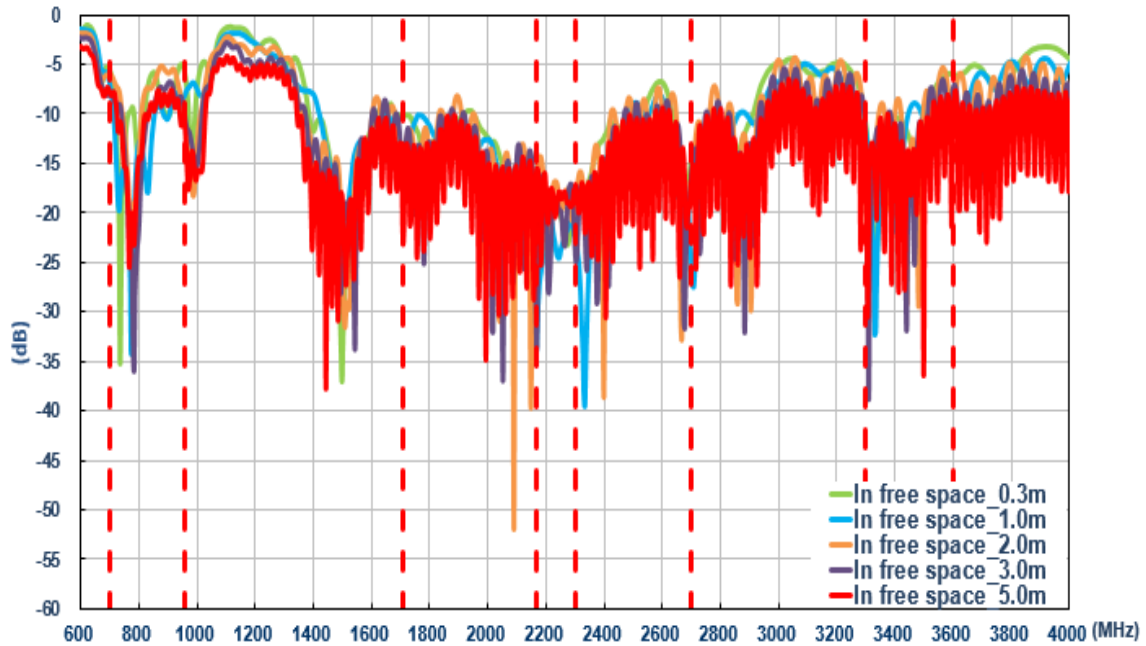


6.1.2. Return Loss (LTE_MIMO_2)

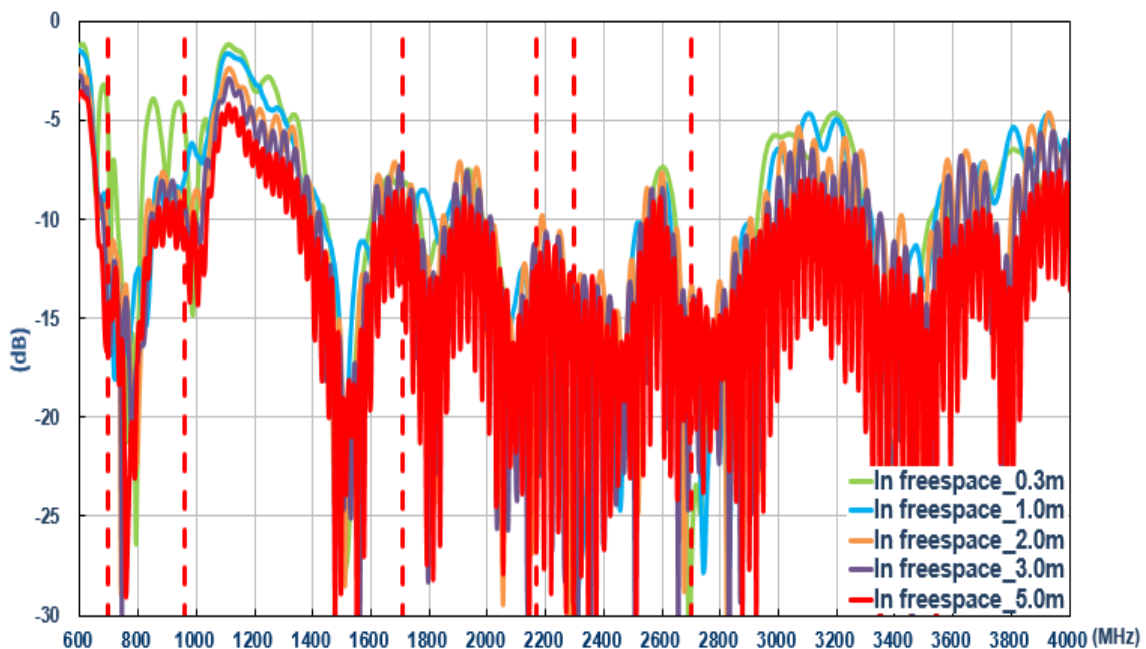


6.1.3. Isolation (LTE antenna)

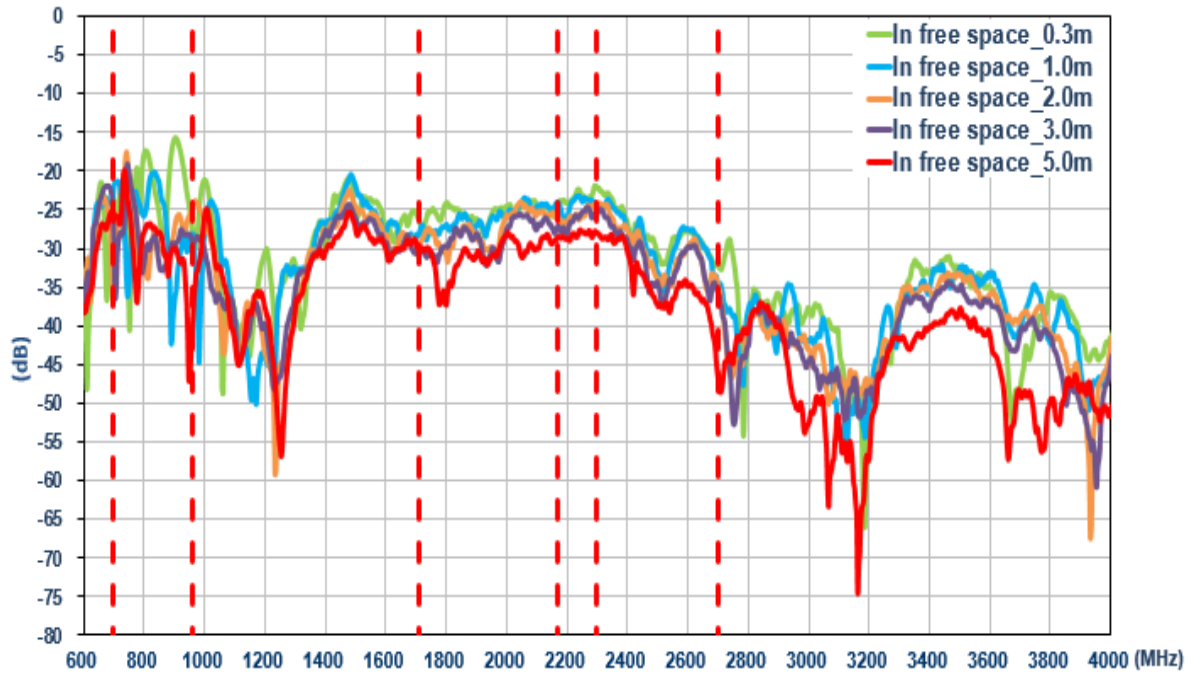


6.1.4. Efficiency (LTE MIMO_1)

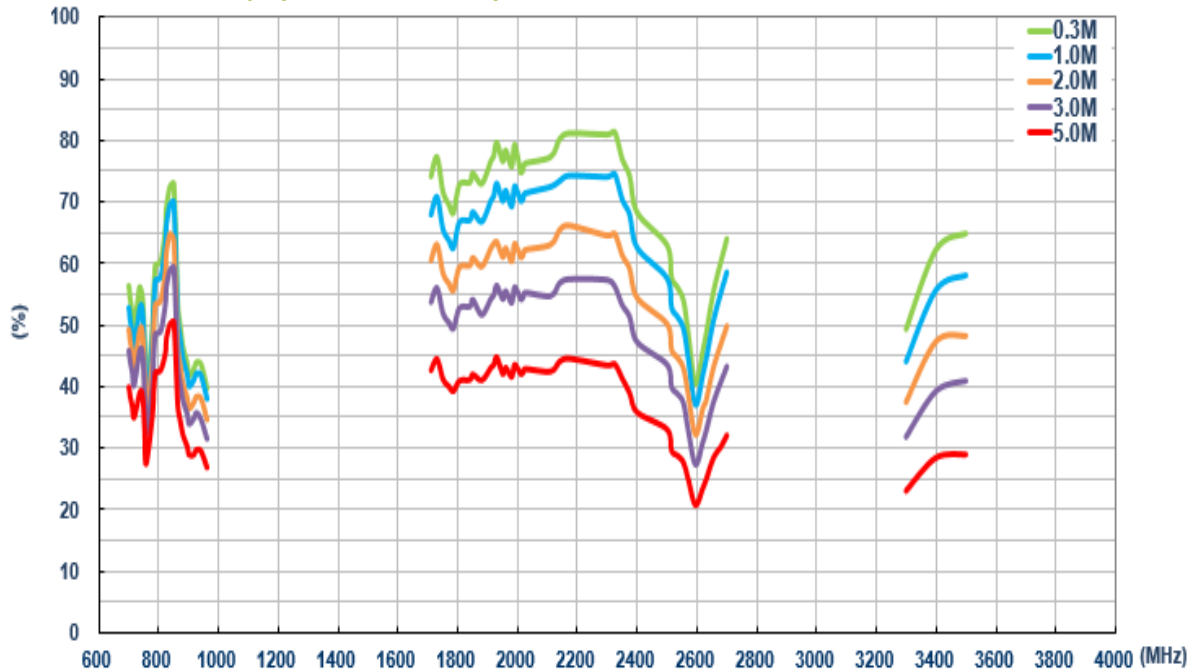


6.1.5. Efficiency (LTE MIMO_2)

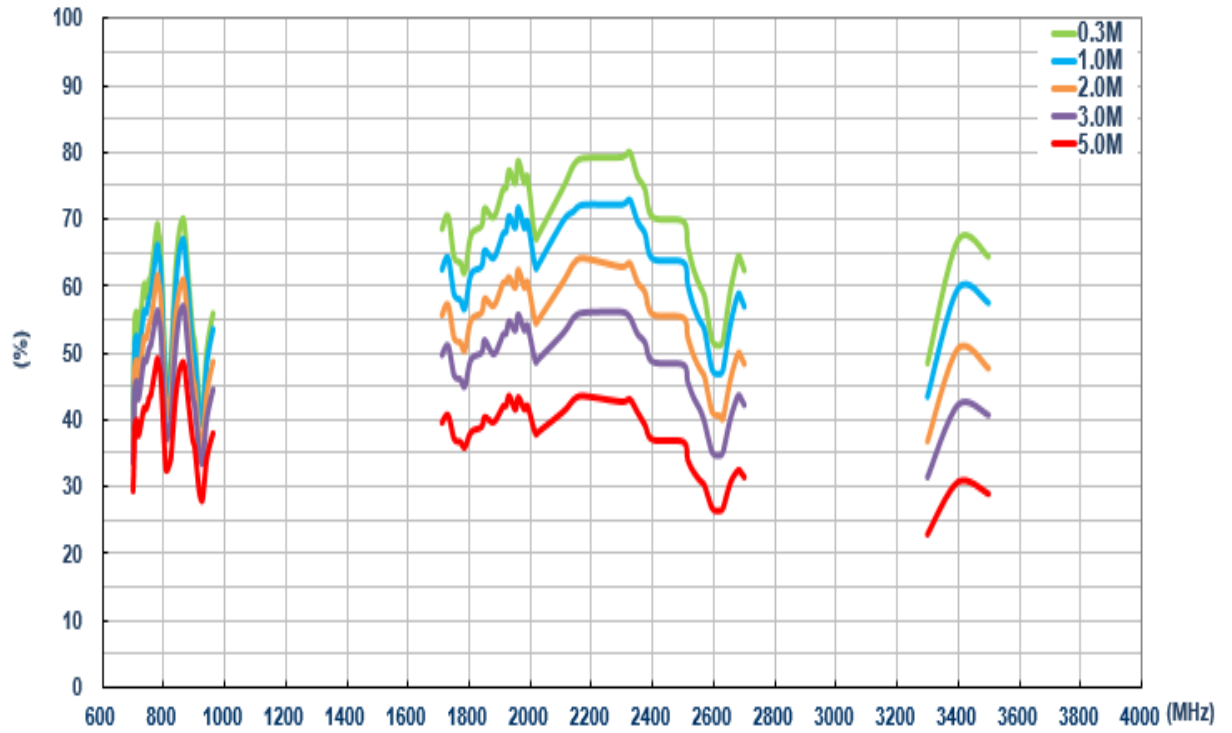


6.1.6. Average Gain (LTE MIMO_1)

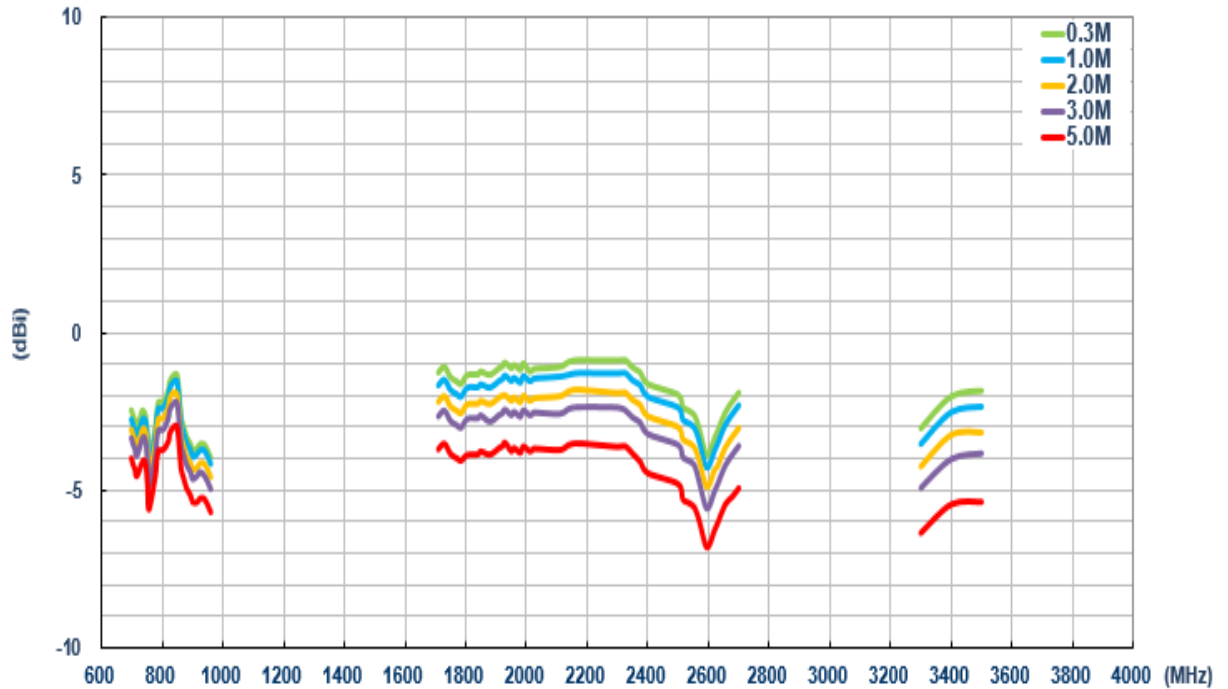


6.1.7. Average Gain (LTE MIMO_2)

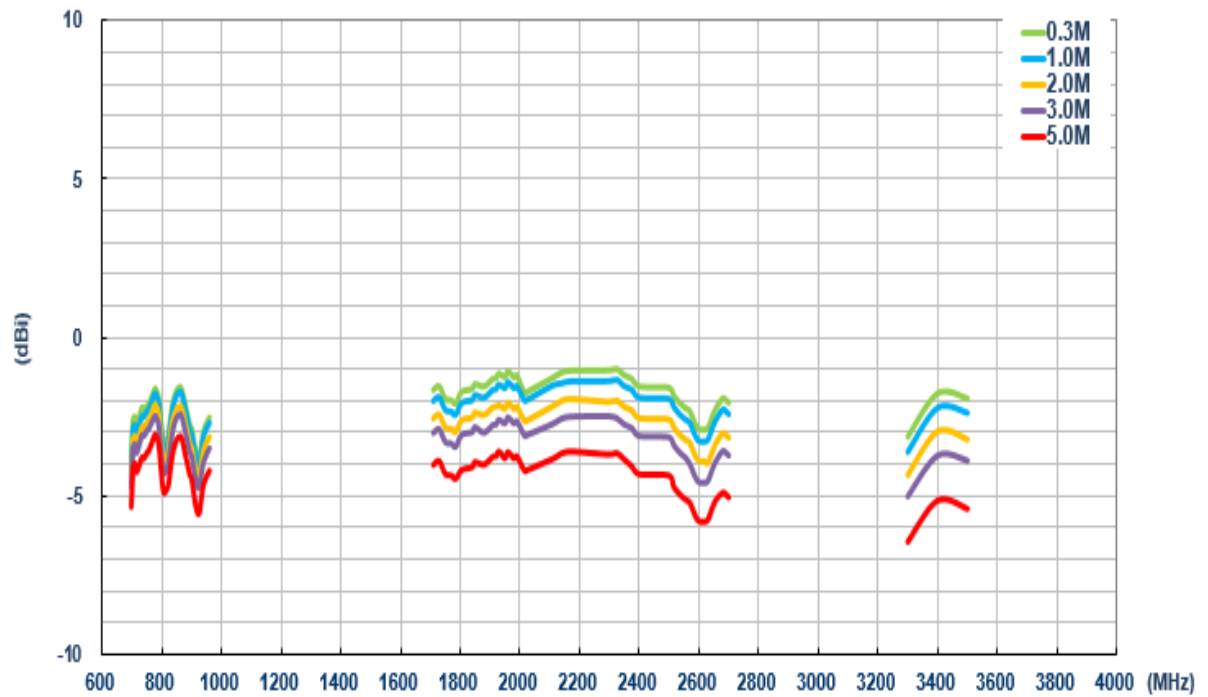

6.1.8. Peak Gain (LTE MIMO_1)

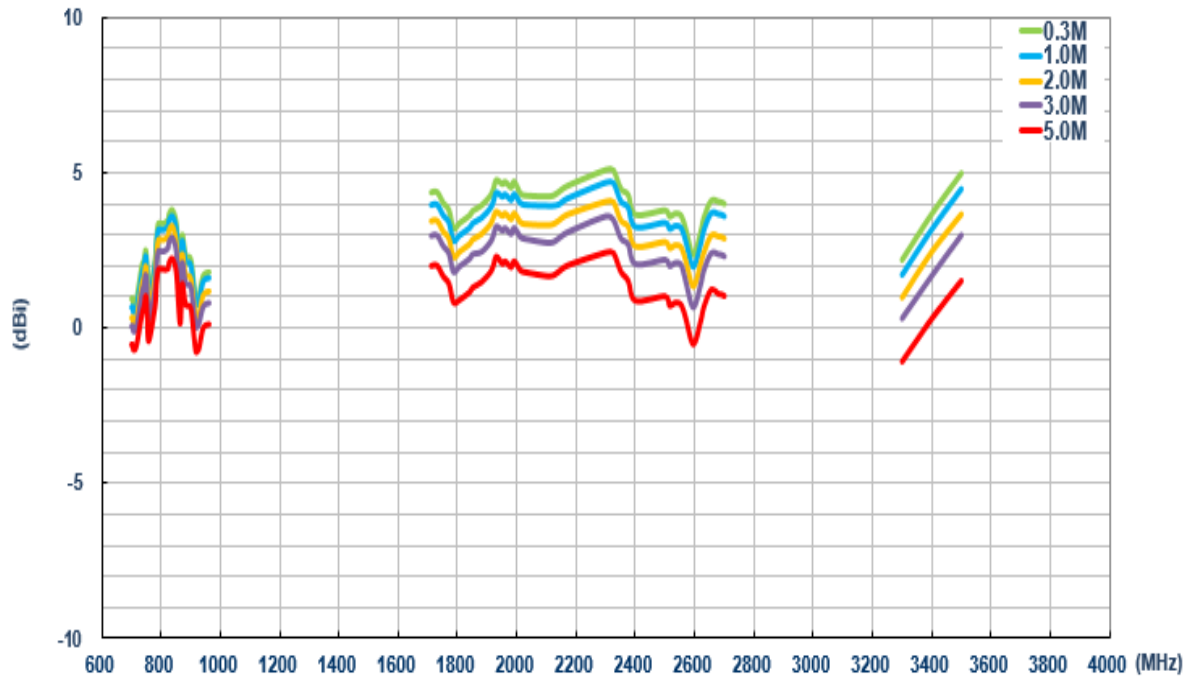


6.1.9. Peak Gain (LTE MIMO_2)

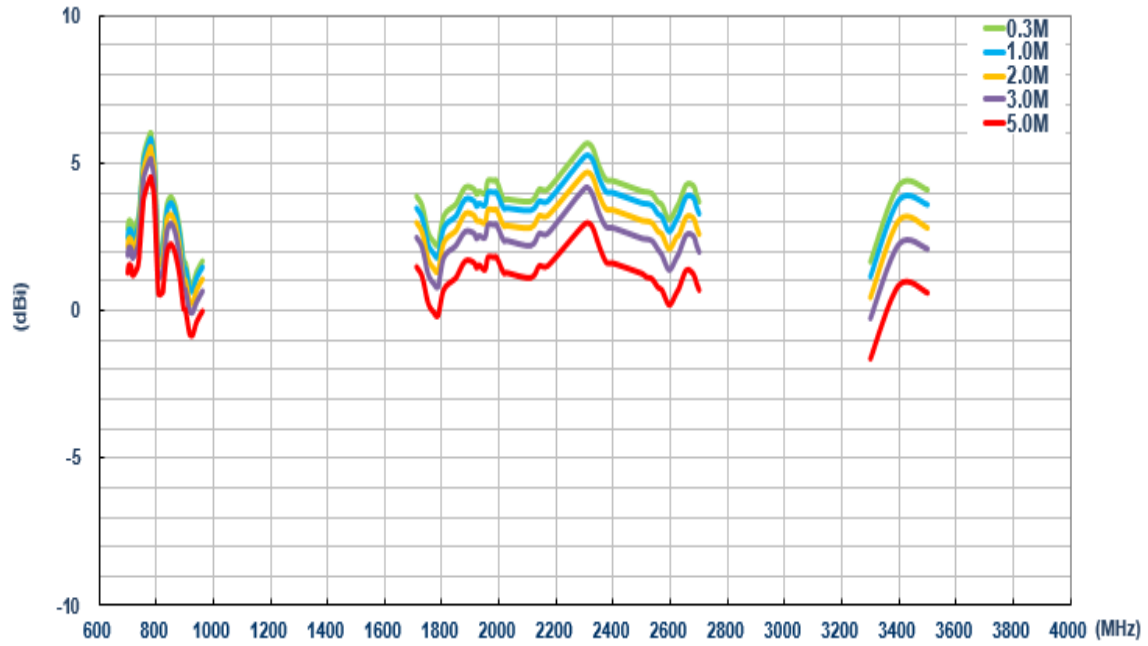


6.2. In free space (Wi-Fi)


6.2.1. Return Loss (Wi-Fi_MIMO_1)

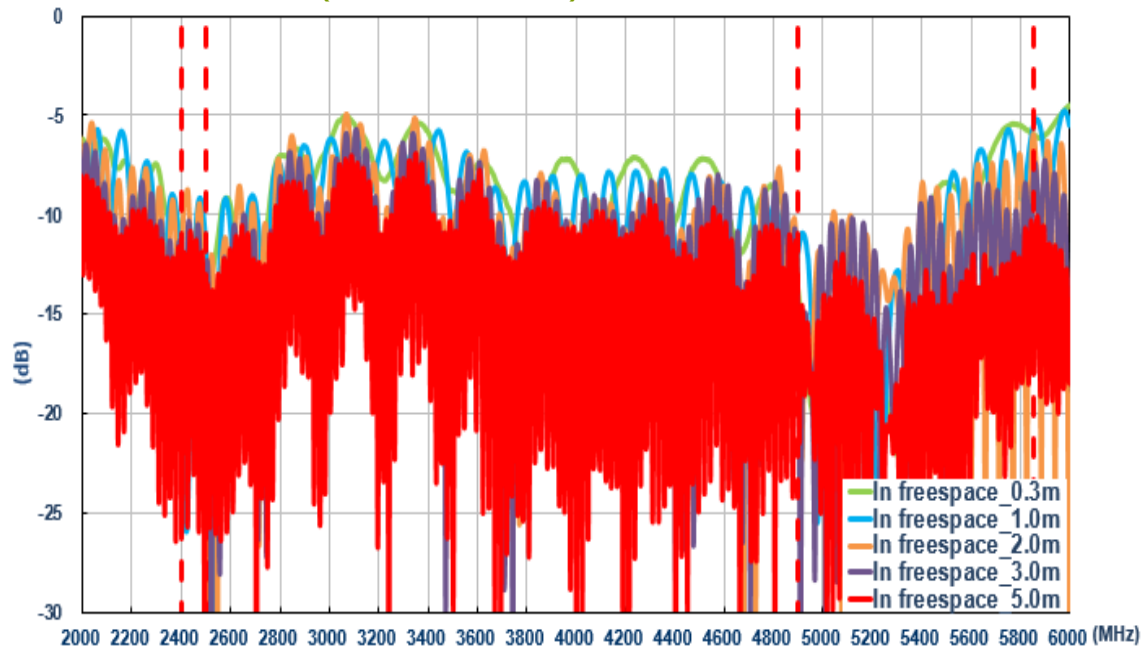


6.2.2. Return Loss (Wi-Fi_MIMO_2)

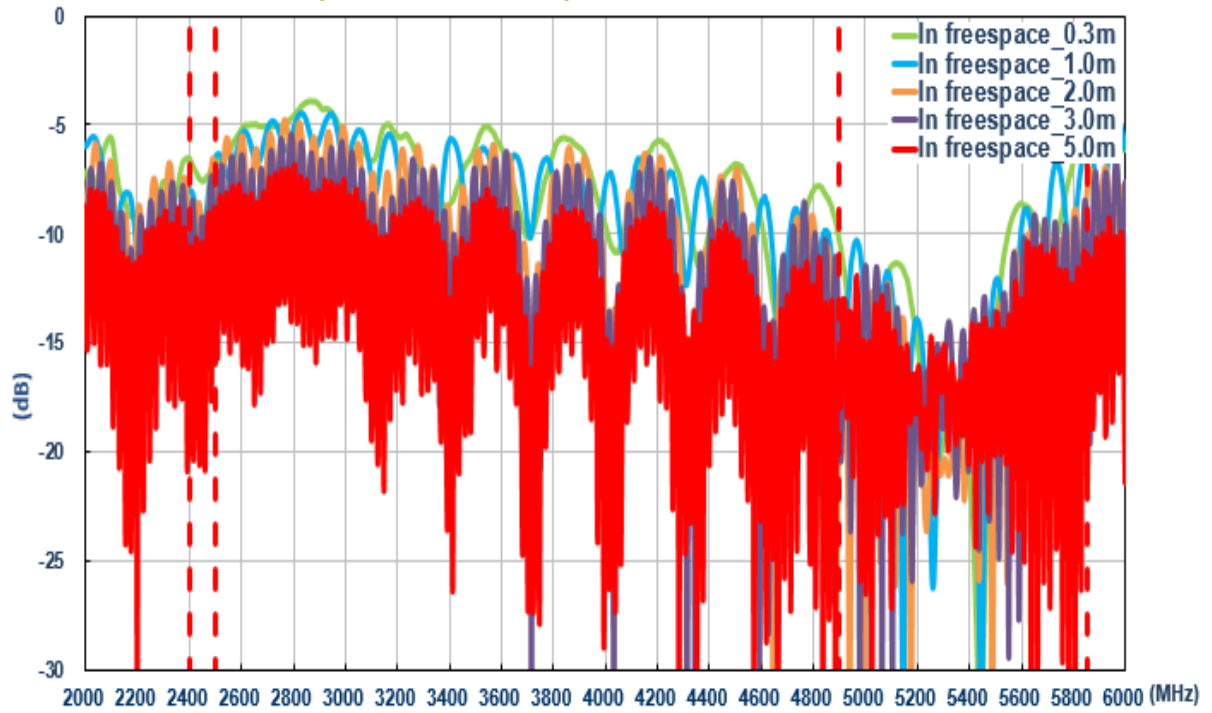


6.2.3. Isolation (Wi-Fi)

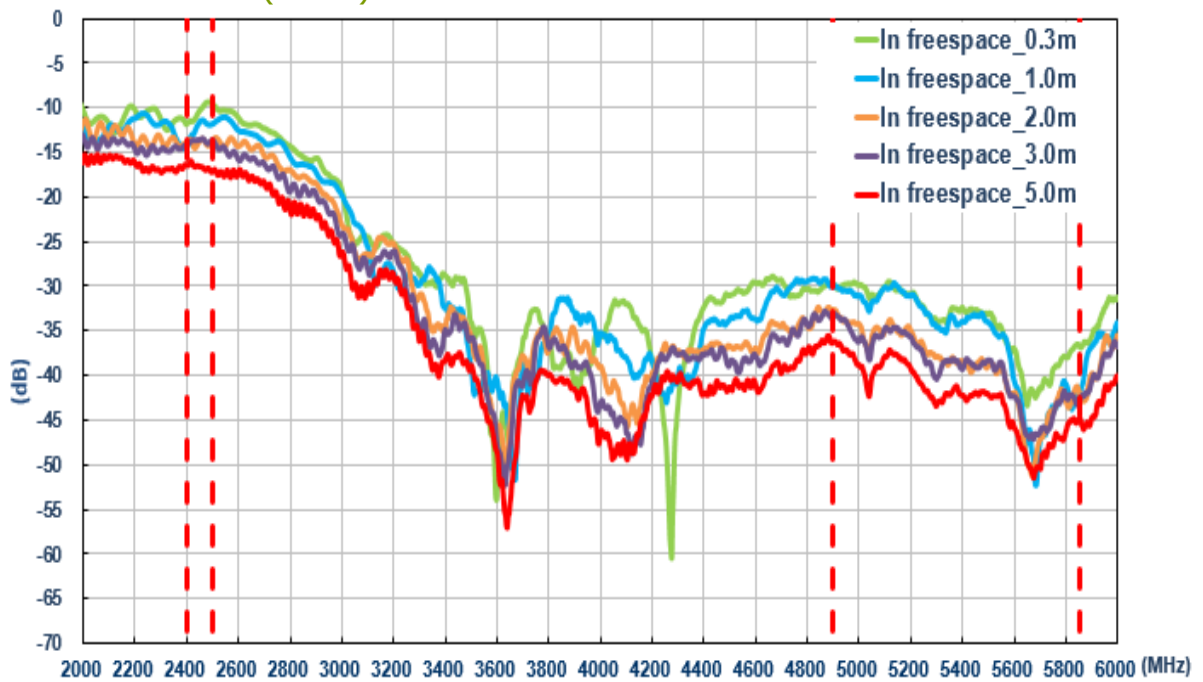


6.2.4. Efficiency (Wi-Fi MIMO_1)

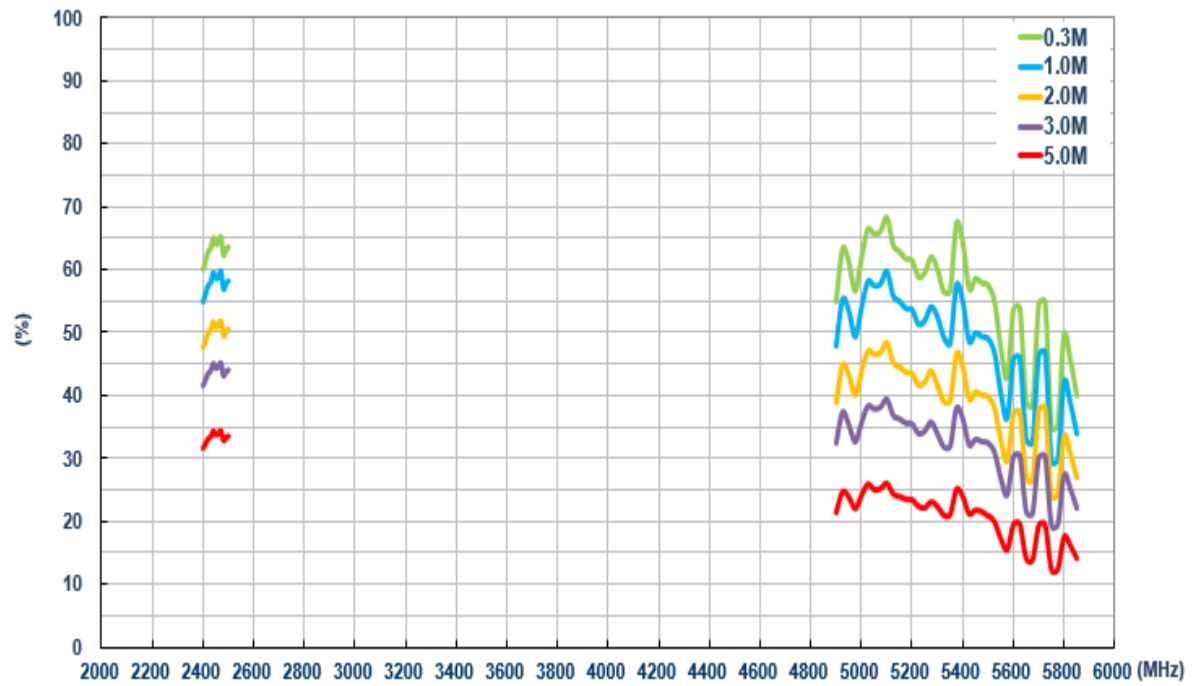


6.2.5. Efficiency (Wi-Fi MIMO_2)

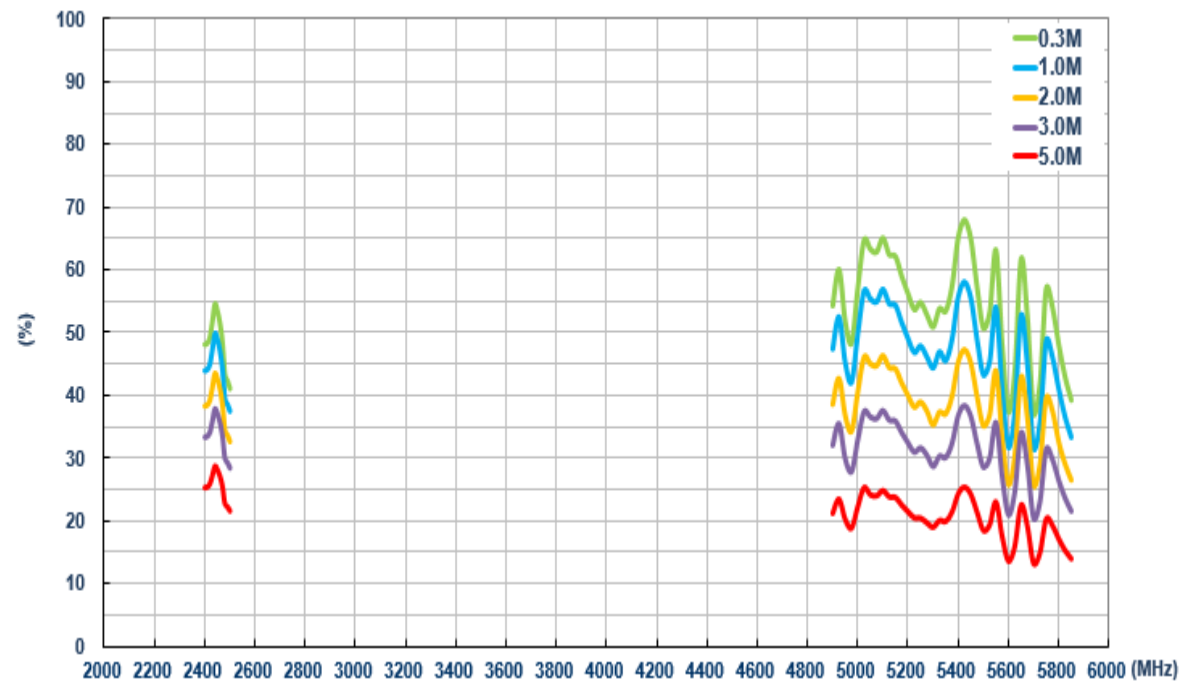


6.2.6. Average Gain (Wi-Fi MIMO_1)

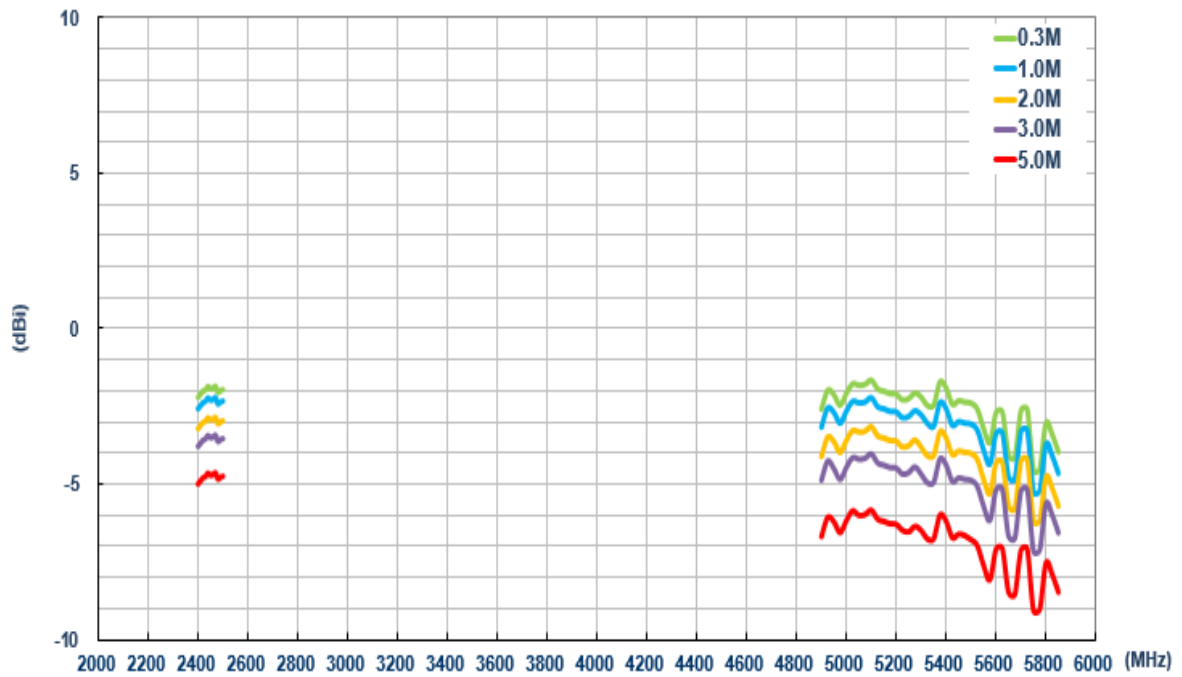


6.2.7. Average Gain (Wi-Fi MIMO_2)

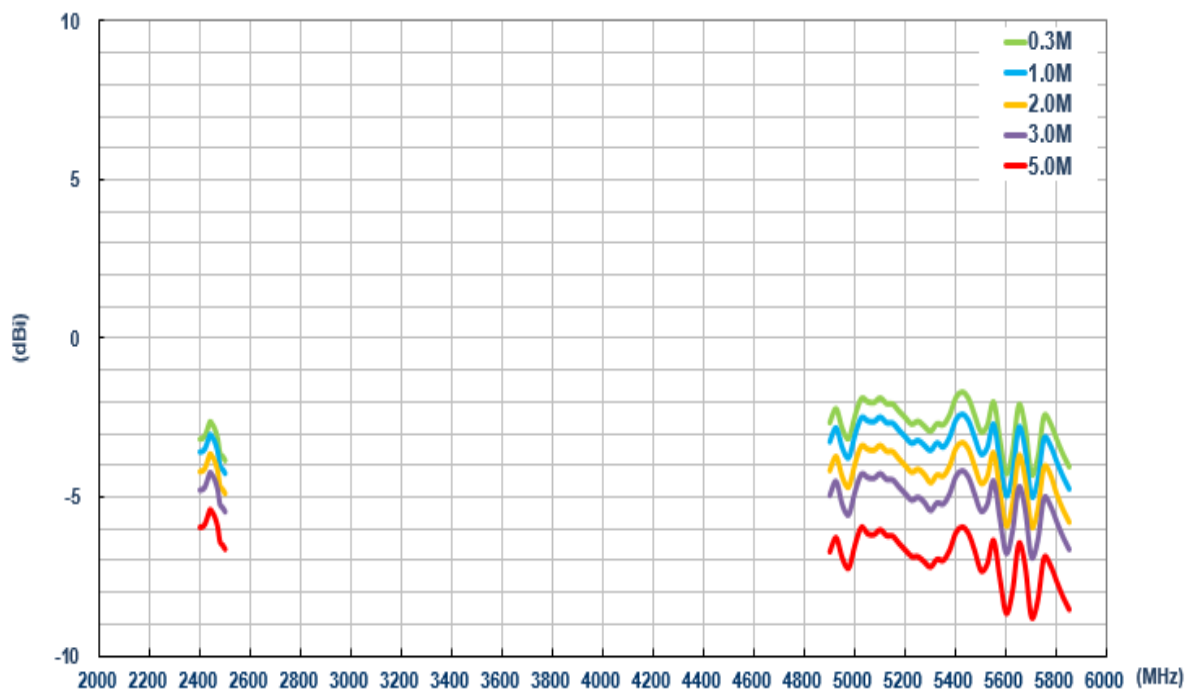

6.2.8. Peak Gain (Wi-Fi MIMO_1)

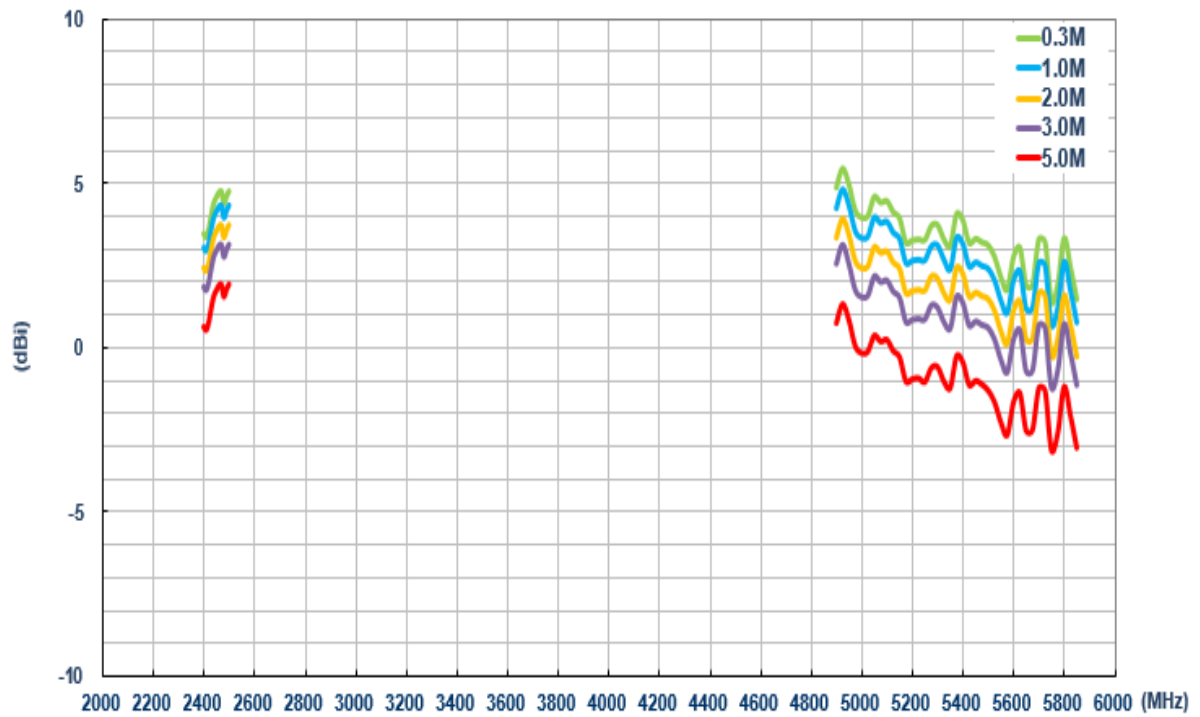


6.2.9. Peak Gain (Wi-Fi MIMO_2)

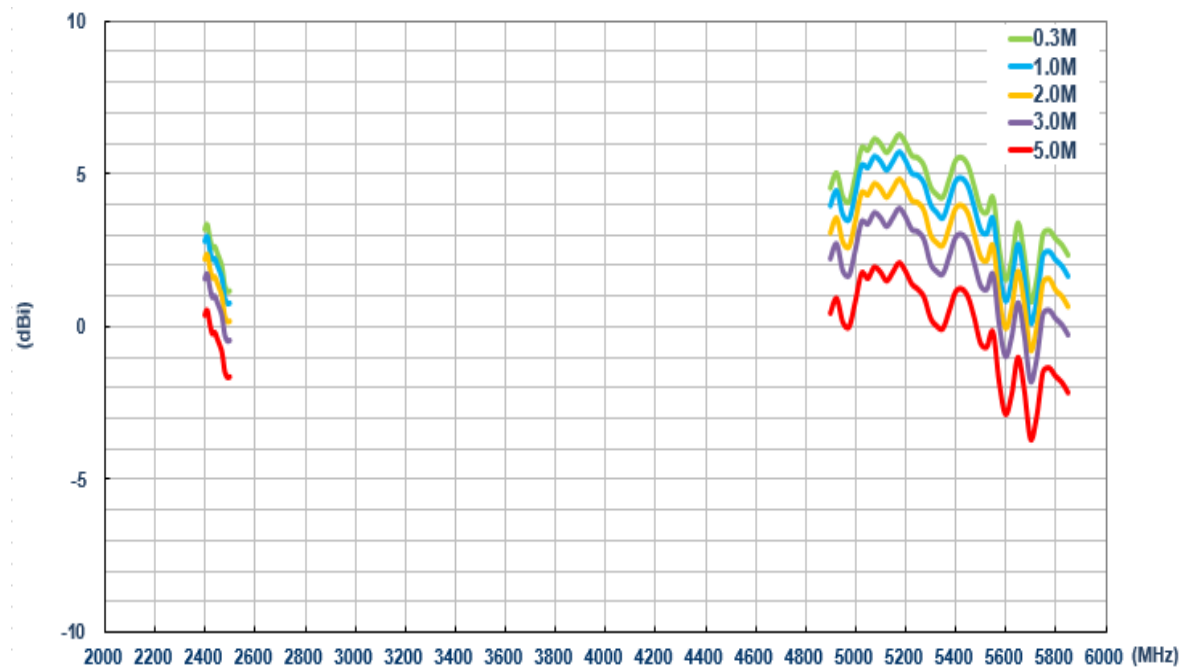


6.3. On the ABS (LTE)


6.3.1. Return Loss (LTE_MIMO_1)

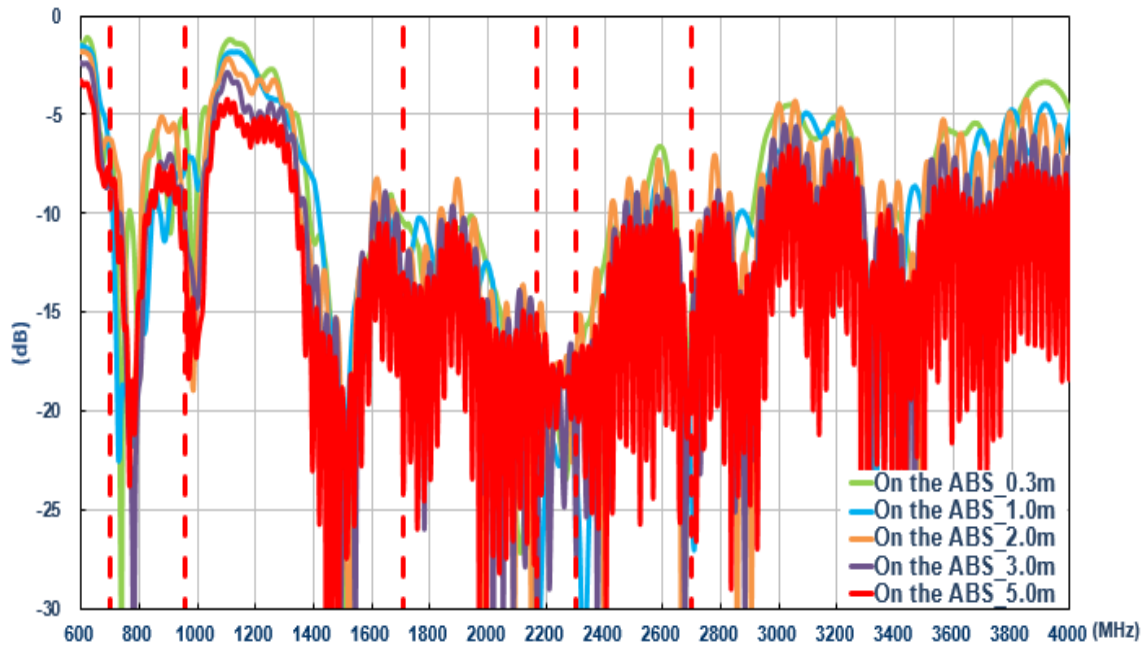


6.3.2. Return Loss (LTE_MIMO_2)

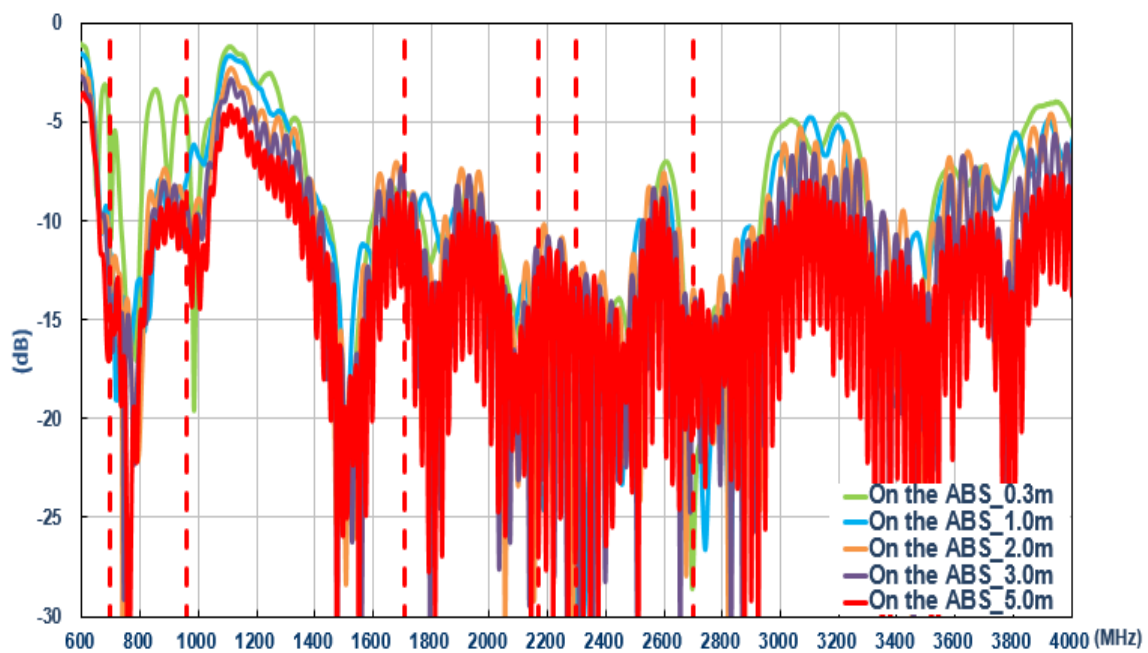


6.3.3. Isolation (LTE antenna)

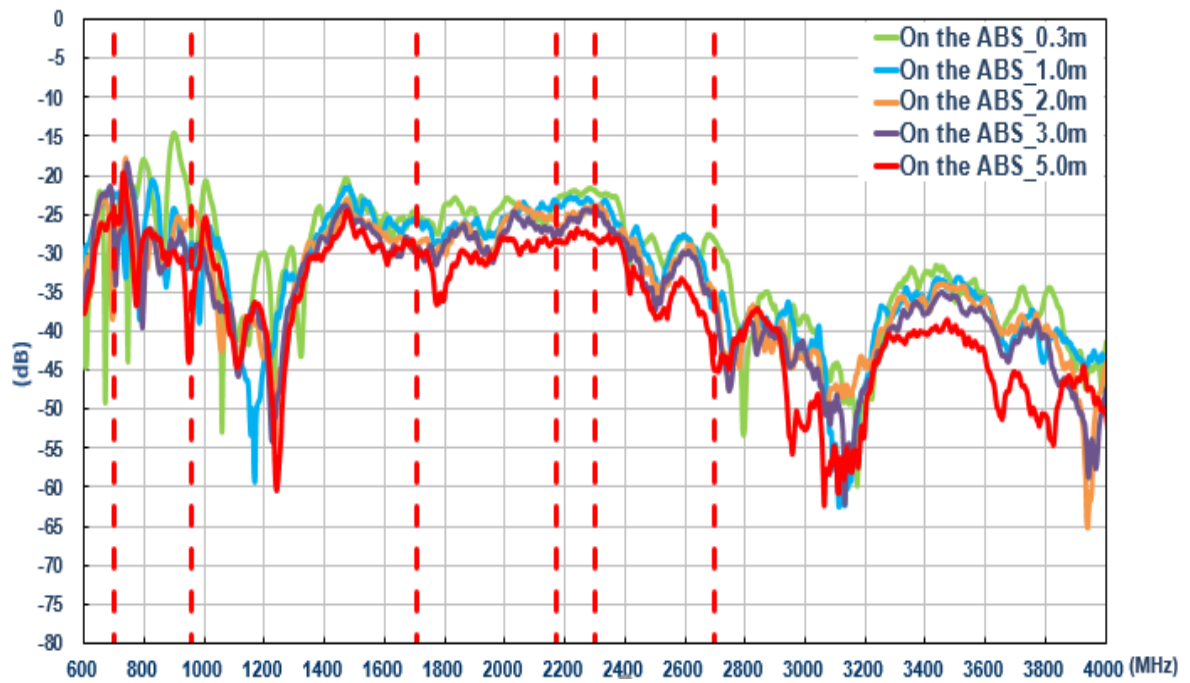


6.3.4. Efficiency (LTE MIMO_1)

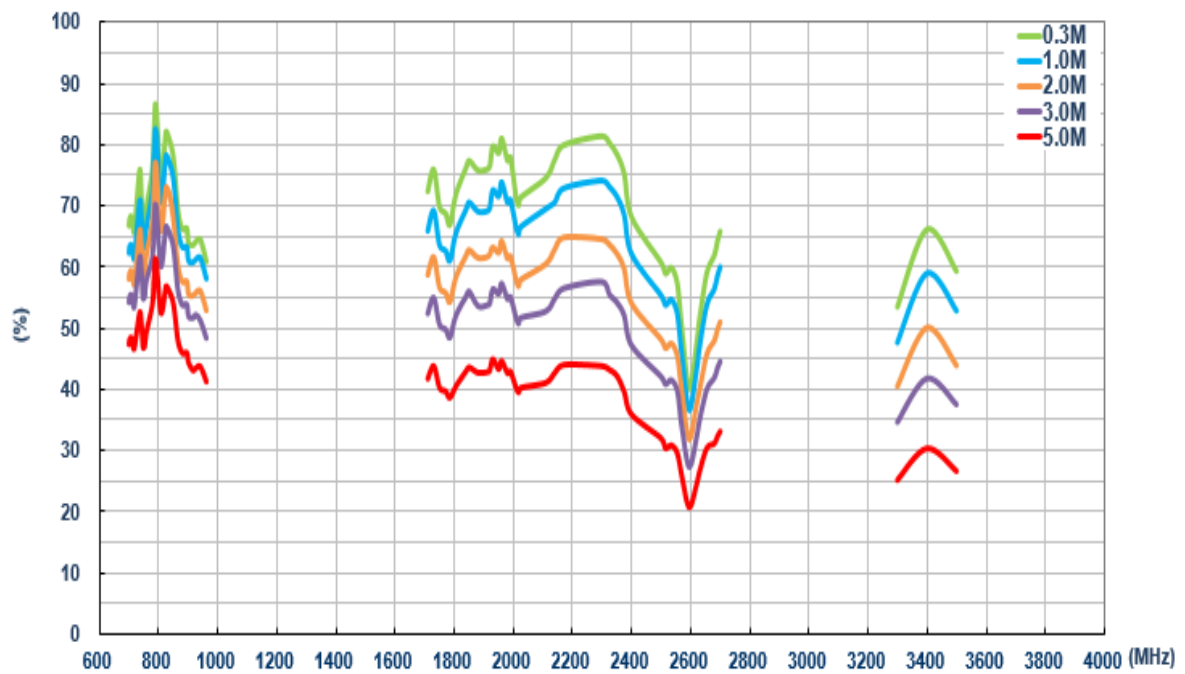


6.3.5. Efficiency (LTE MIMO_2)

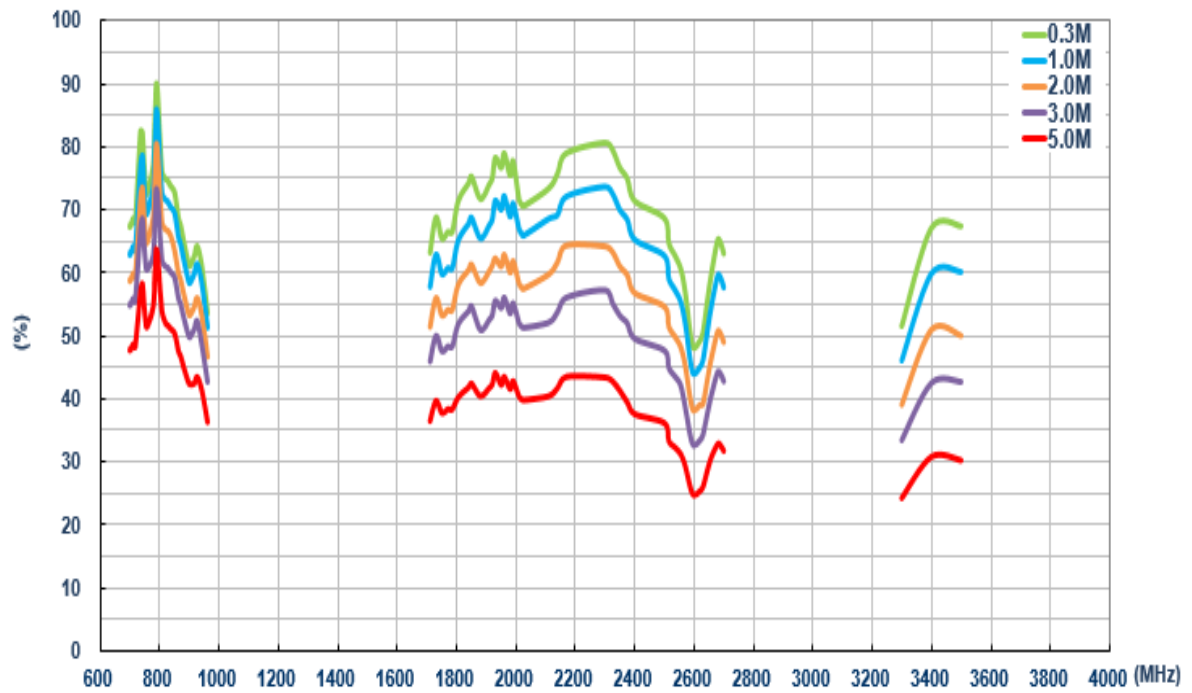


6.3.6. Average Gain (LTE MIMO_1)

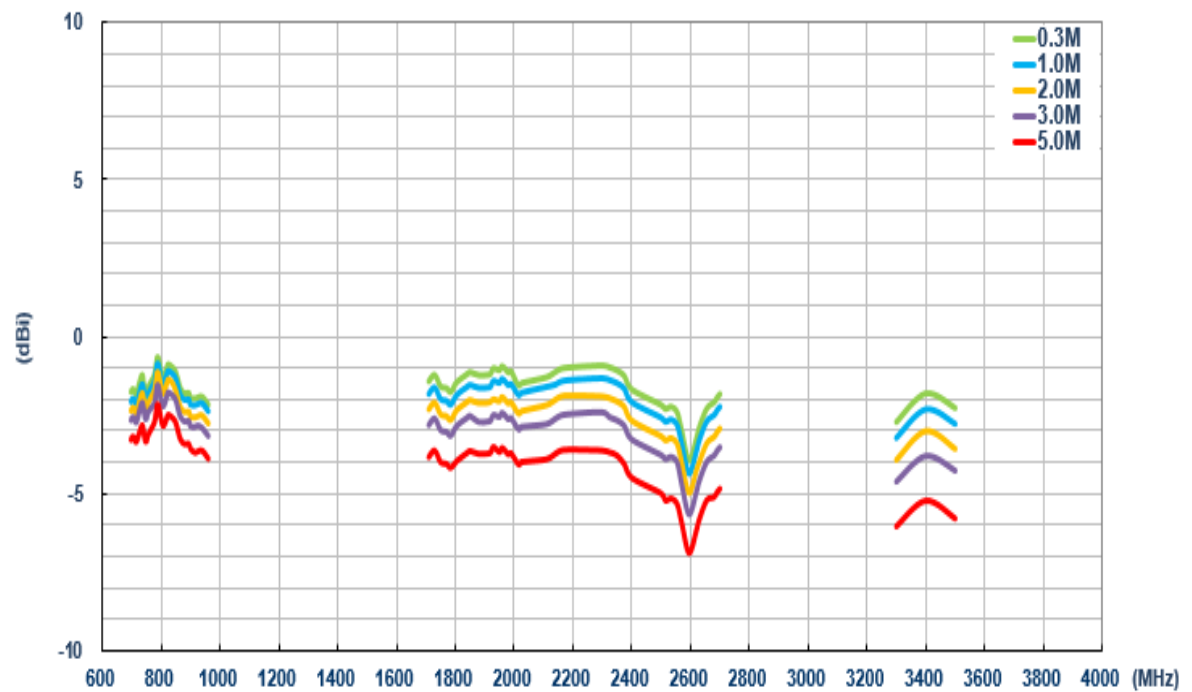


6.3.7. Average Gain (LTE MIMO_2)

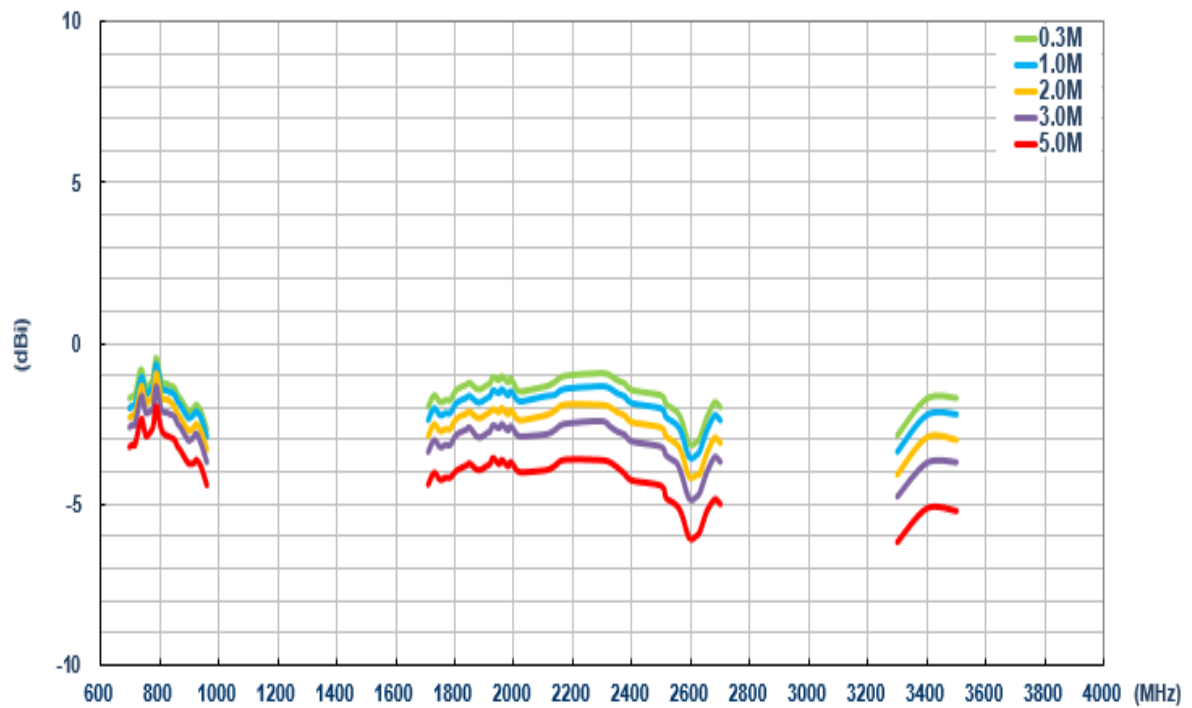

6.3.8. Peak Gain (LTE MIMO_1)

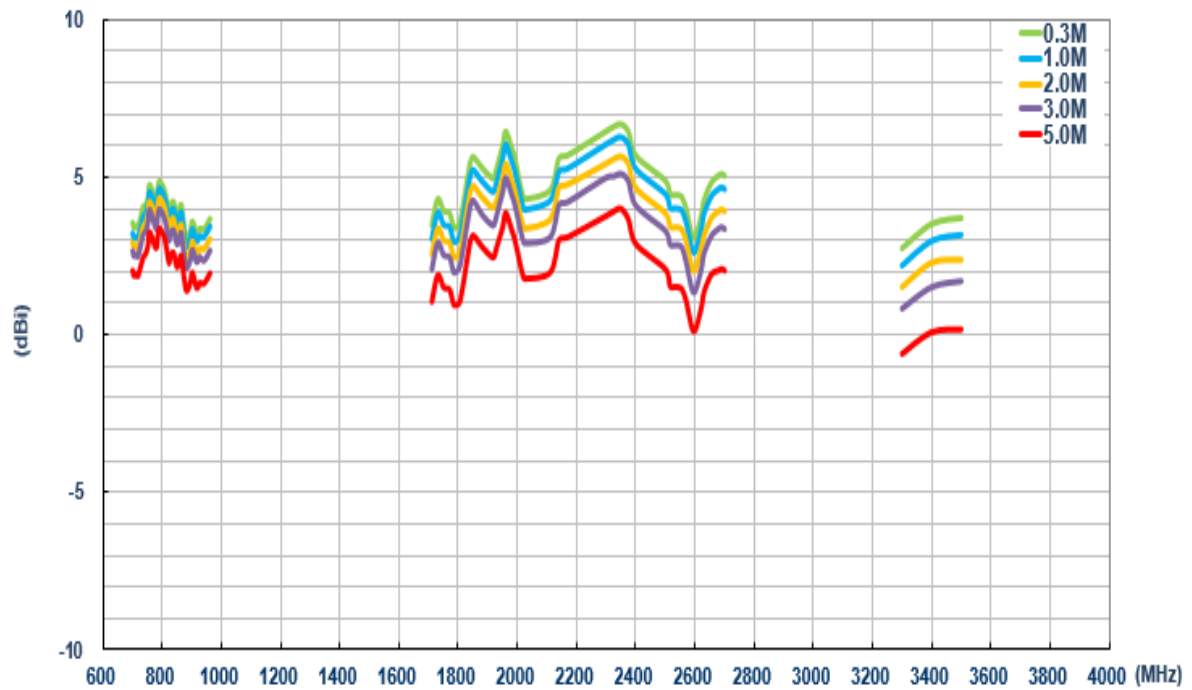


6.3.9. Peak Gain (LTE MIMO_2)

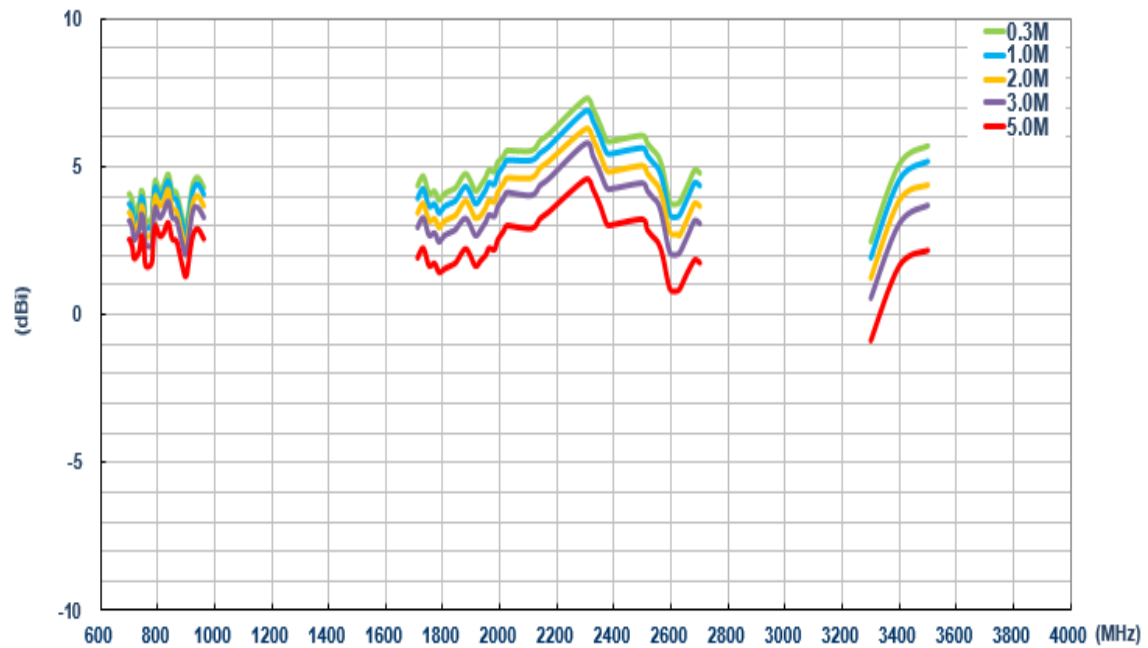


6.4. On ABS (Wi-Fi)


6.4.1. Return Loss (Wi-Fi_MIMO_1)

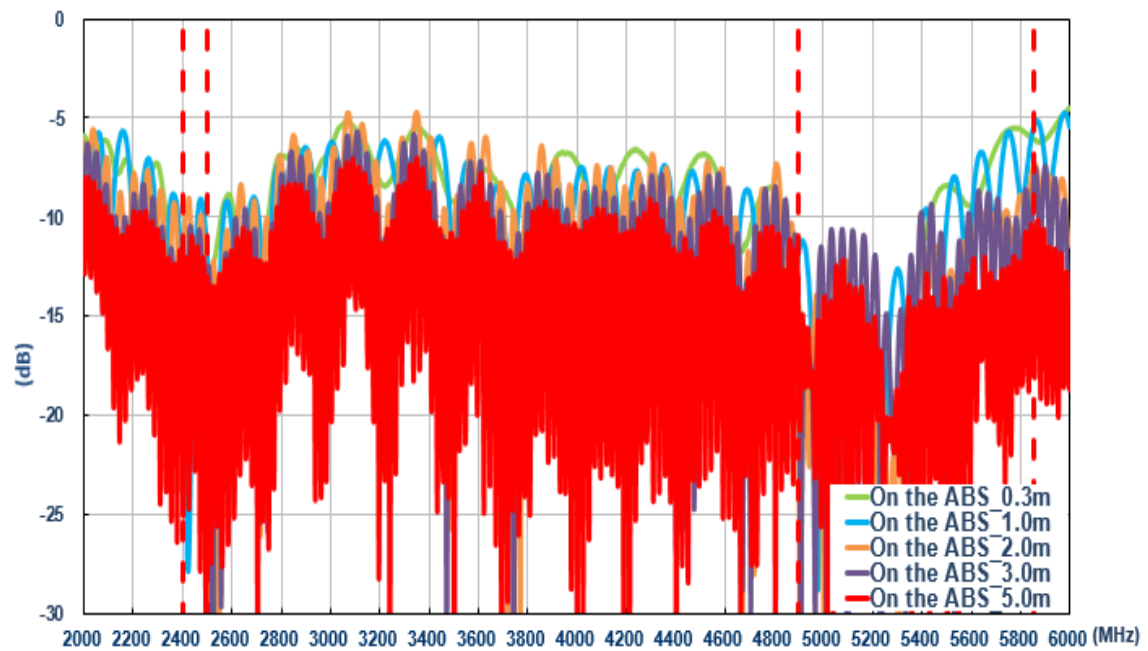


6.4.2. Return Loss (Wi-Fi_MIMO_2)

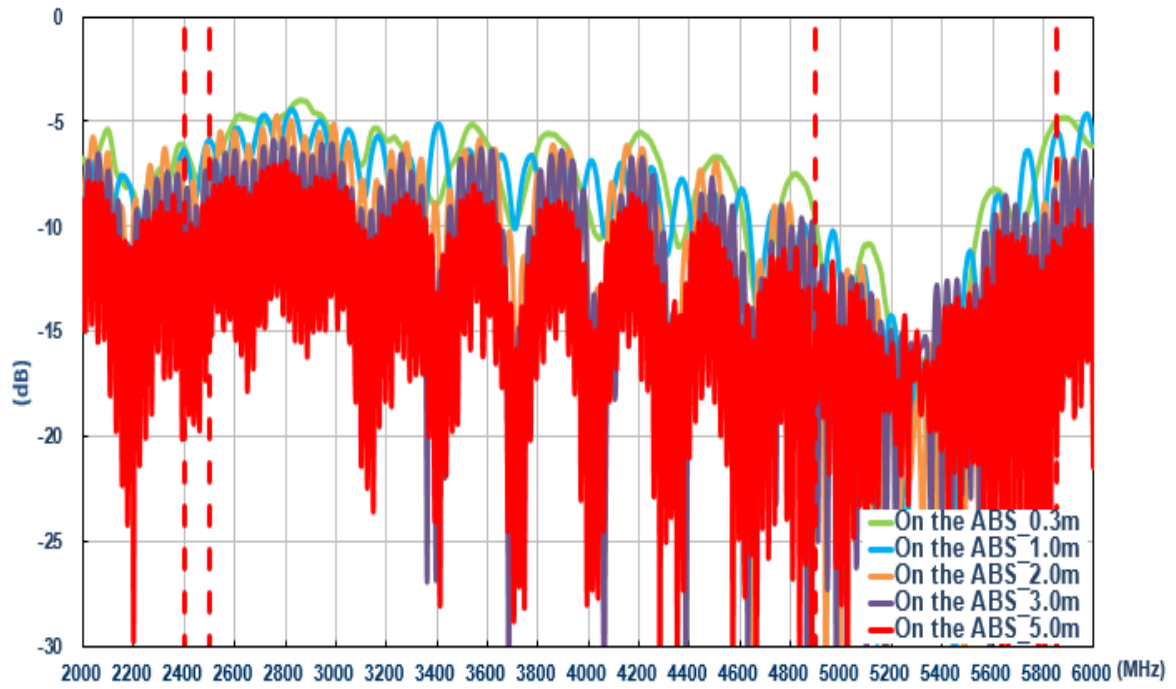


6.4.3. Isolation (Wi-Fi)

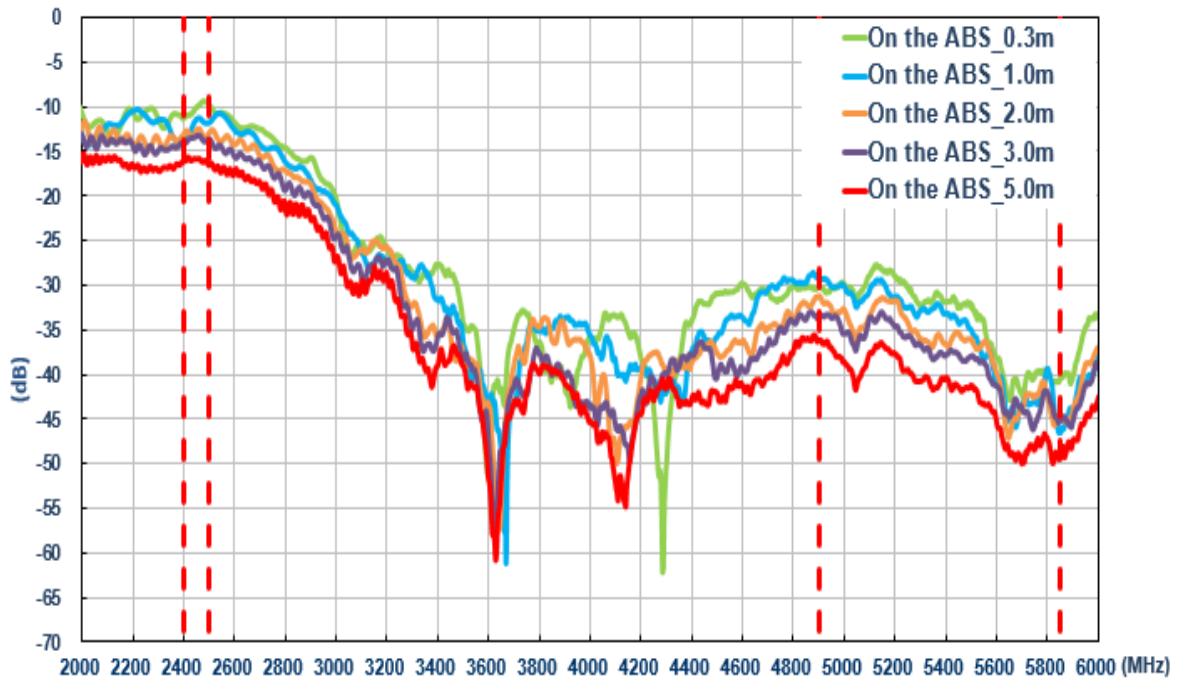


6.4.4. Efficiency (Wi-Fi MIMO_1)

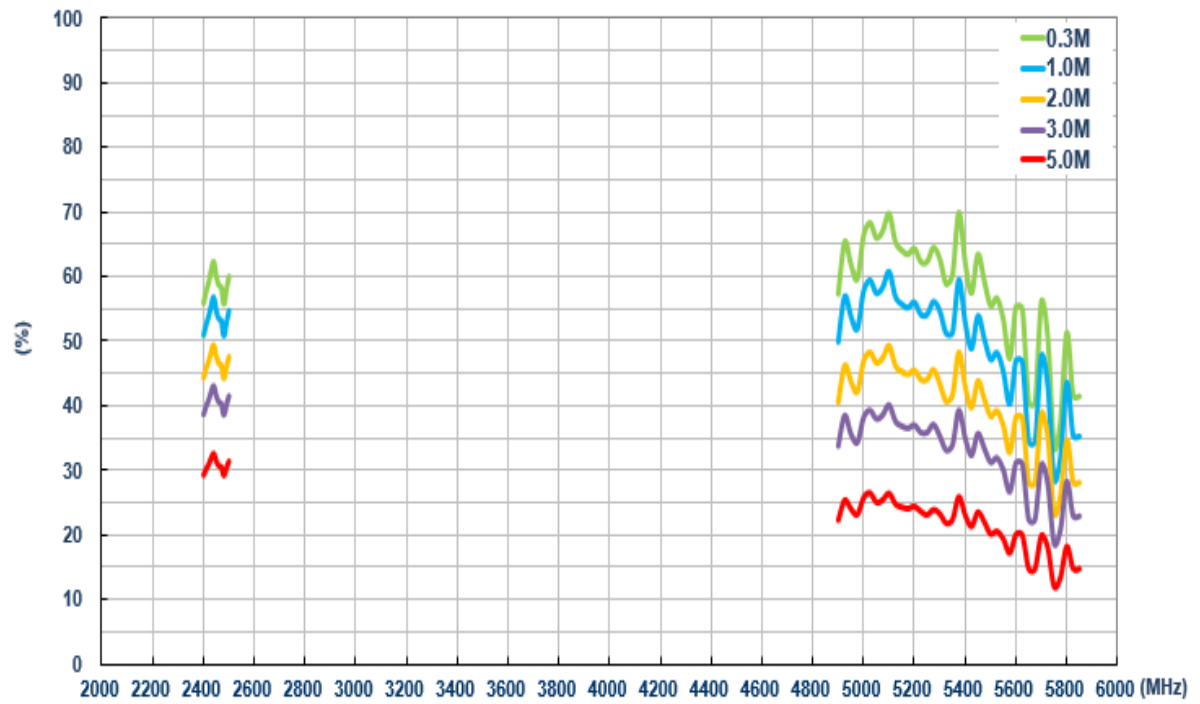


6.4.5. Efficiency (Wi-Fi MIMO_2)

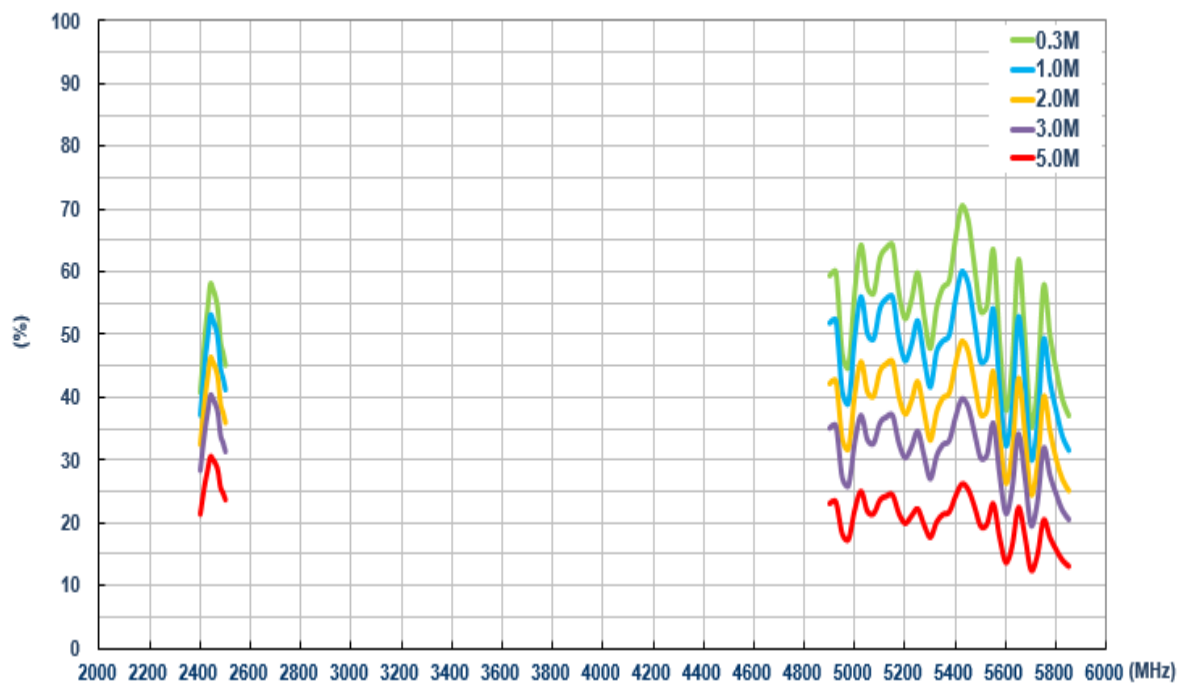


6.4.6. Average Gain (Wi-Fi MIMO_1)

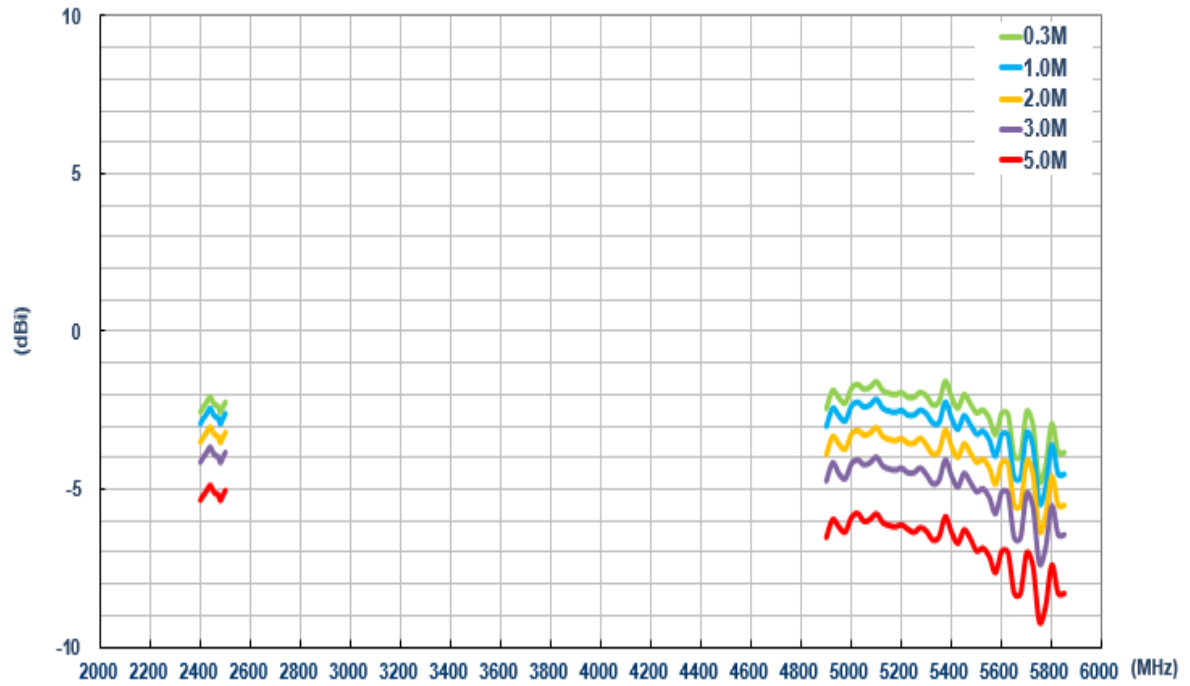


6.4.7. Average Gain (Wi-Fi MIMO_2)

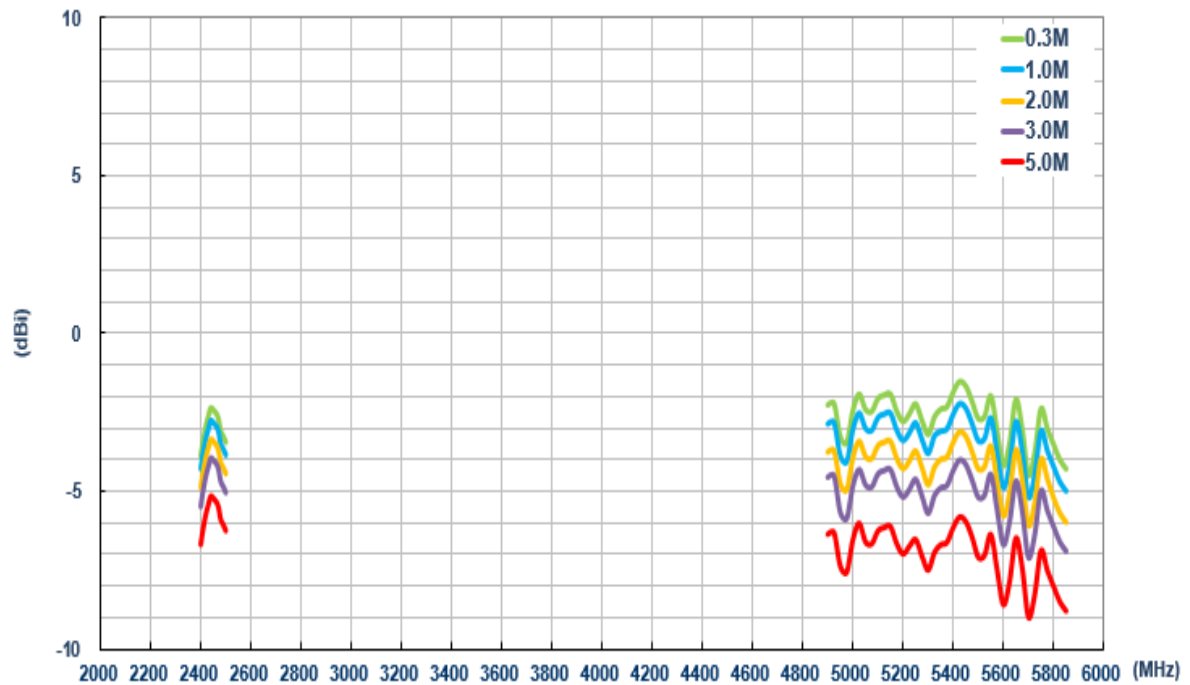

6.4.8. Peak Gain (Wi-Fi MIMO_1)

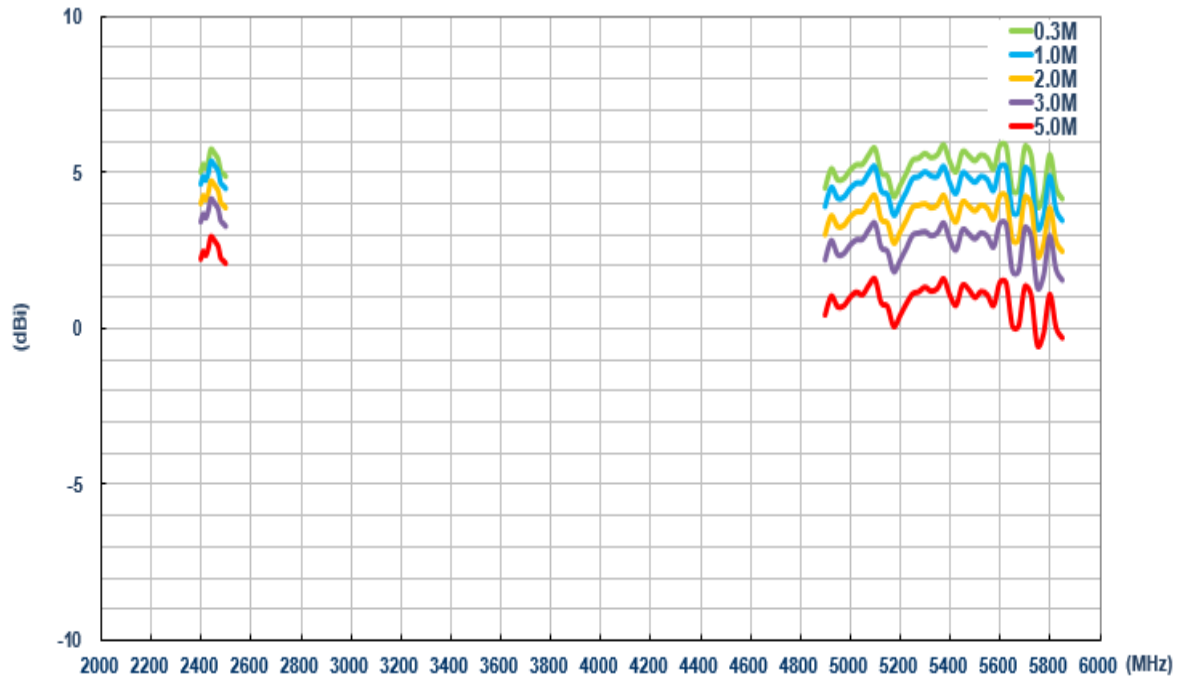


6.4.9. Peak Gain (Wi-Fi MIMO_2)

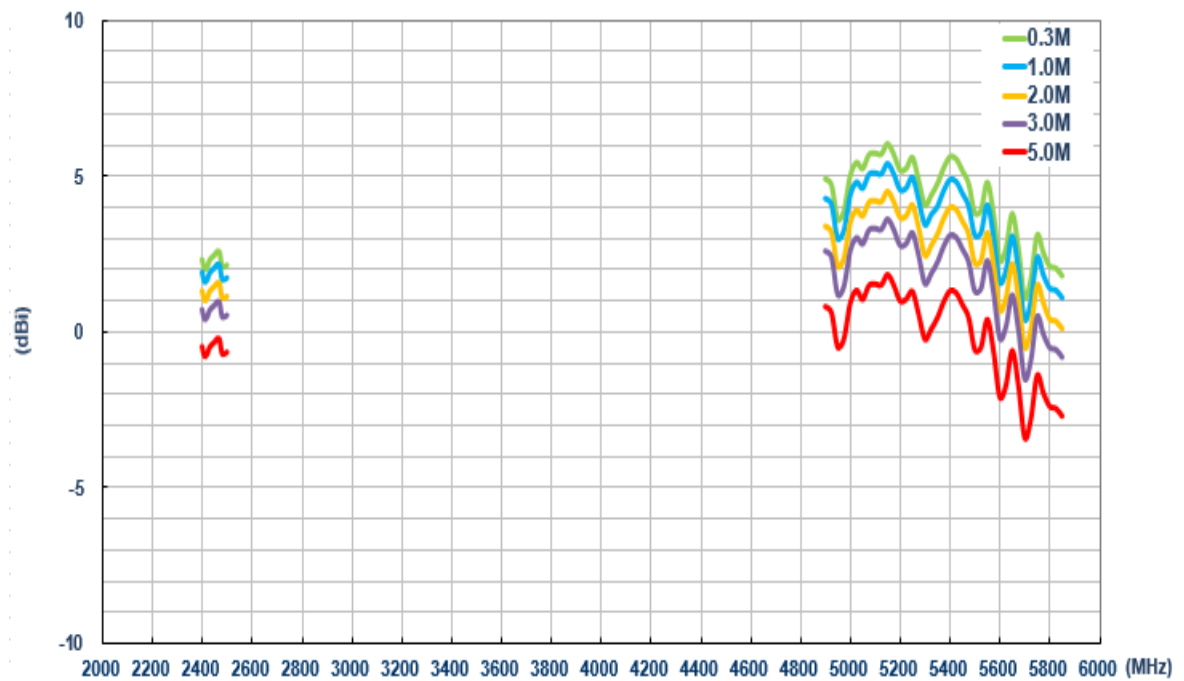


6.5. On glass (LTE)


6.5.1. Return Loss (LTE_MIMO_1)

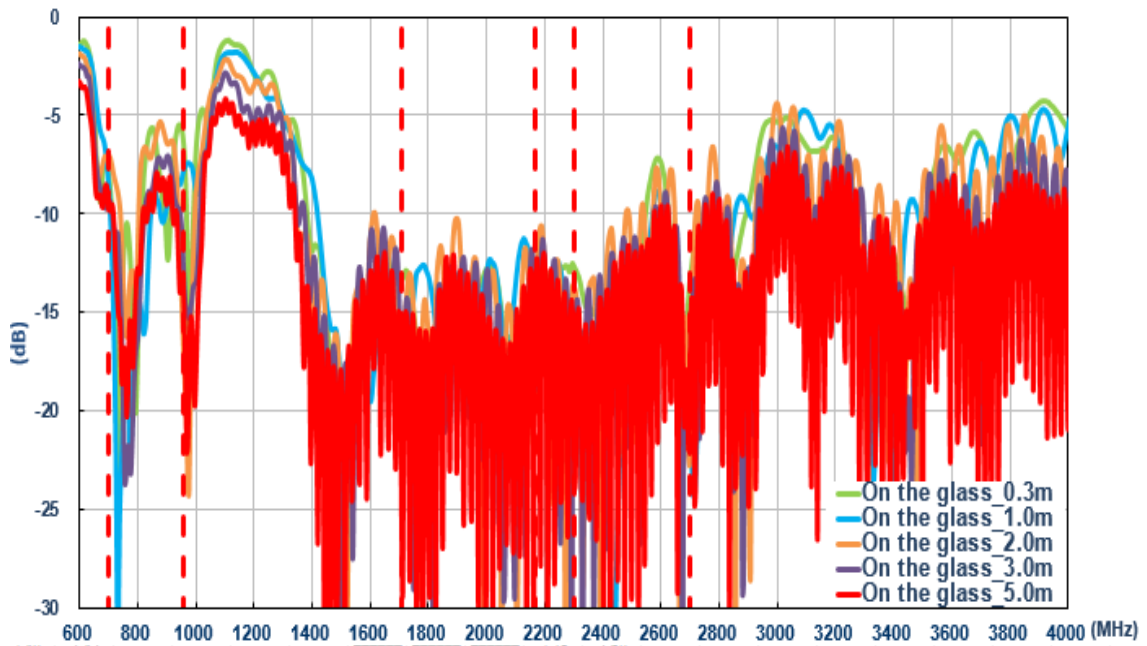


6.5.2. Return Loss (LTE_MIMO_2)

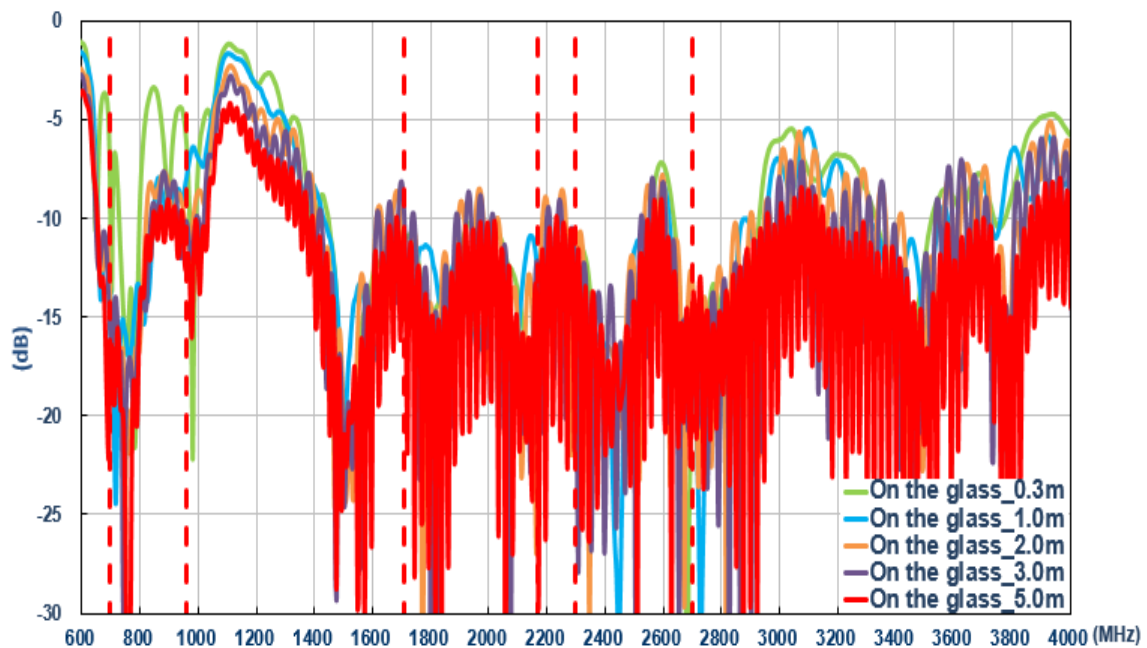


6.5.3. Isolation (LTE antenna)

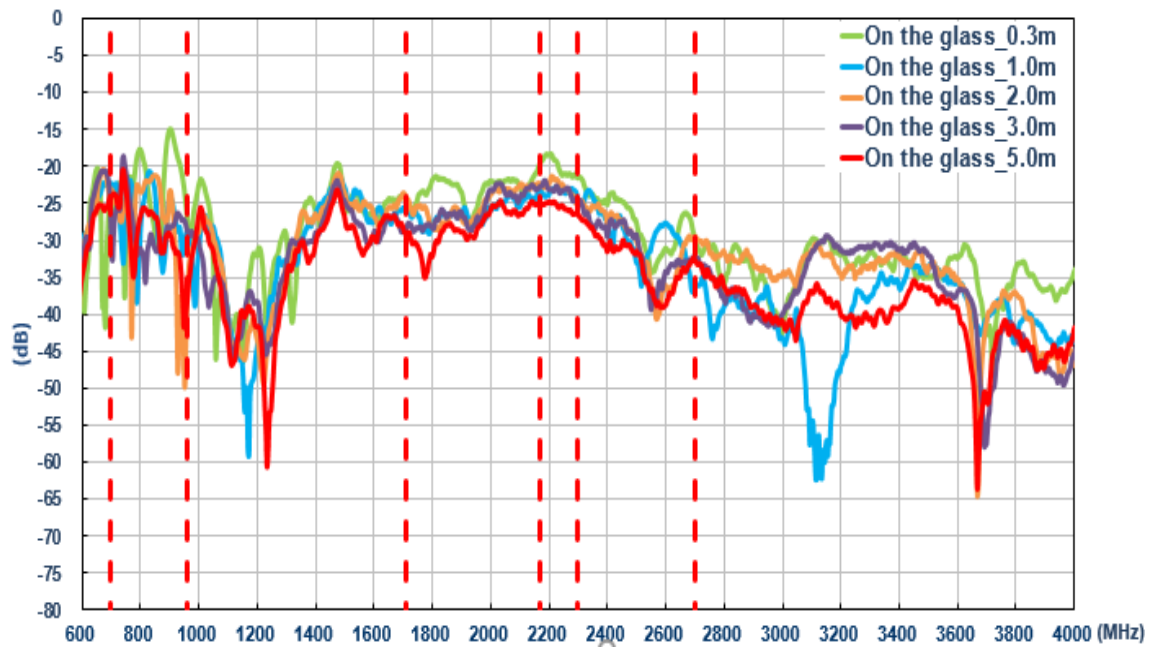


6.5.4. Efficiency (LTE MIMO_1)

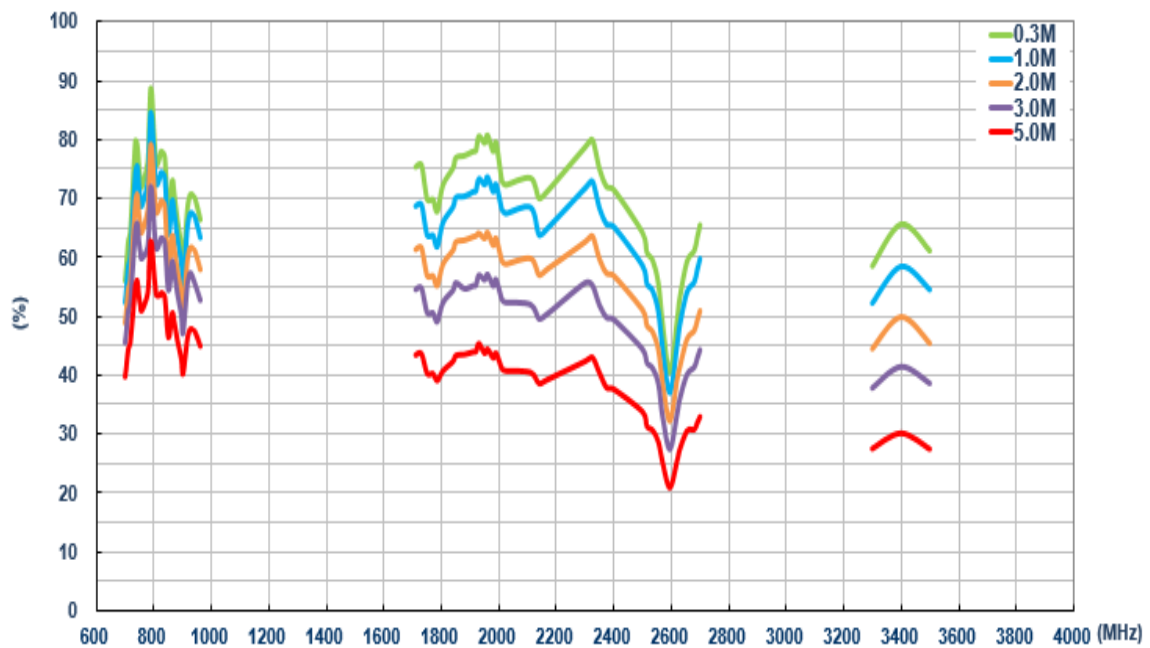


6.5.5. Efficiency (LTE MIMO_2)

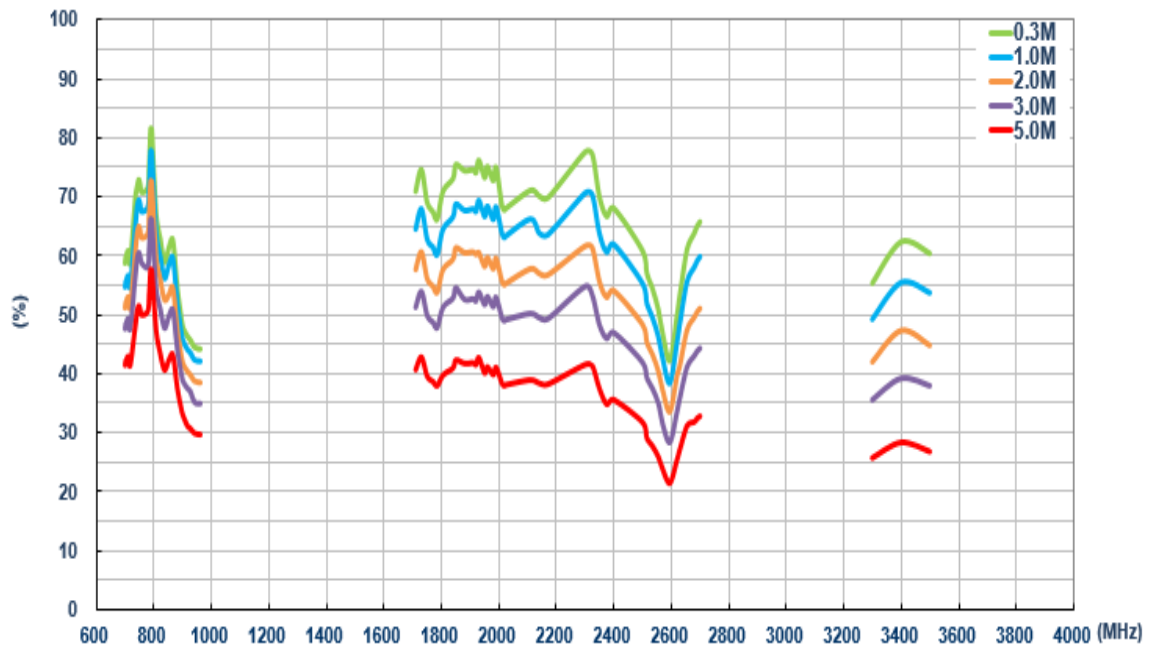


6.5.6. Average Gain (LTE MIMO_1)

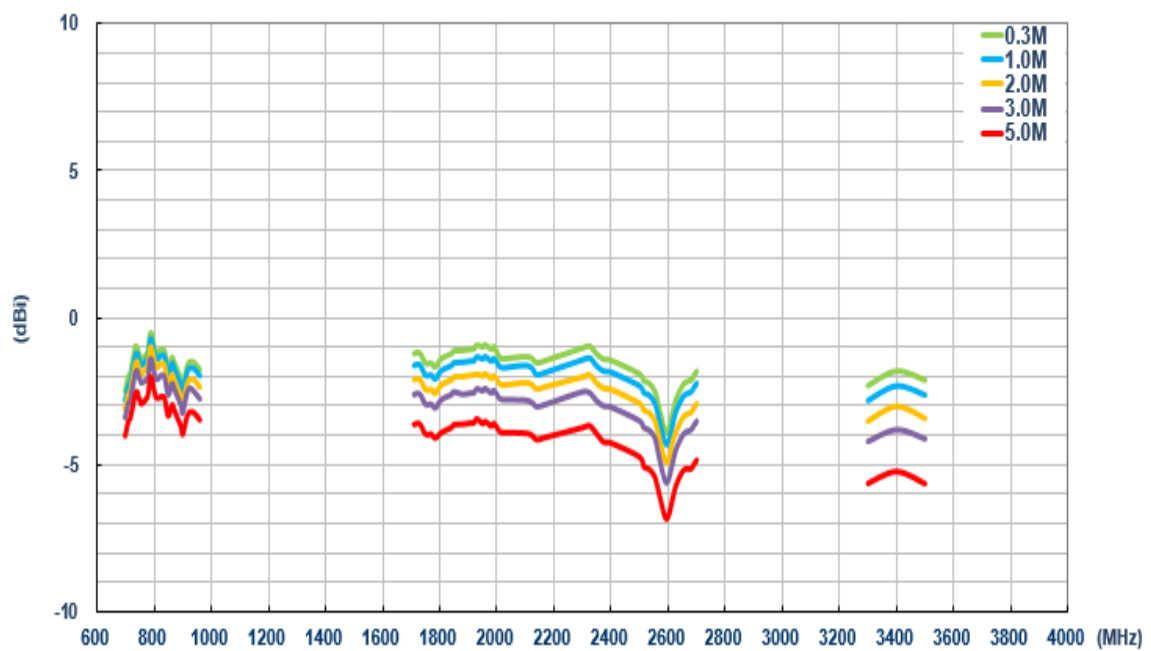


6.5.7. Average Gain (LTE MIMO_2)

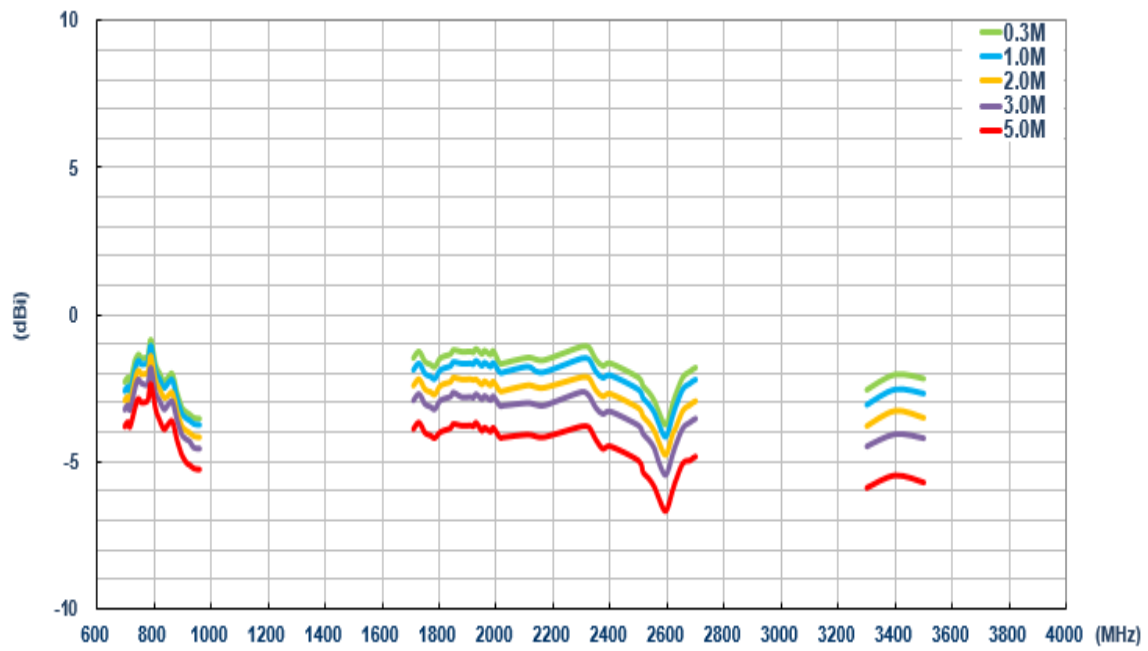

6.5.8. Peak Gain (LTE MIMO_1)

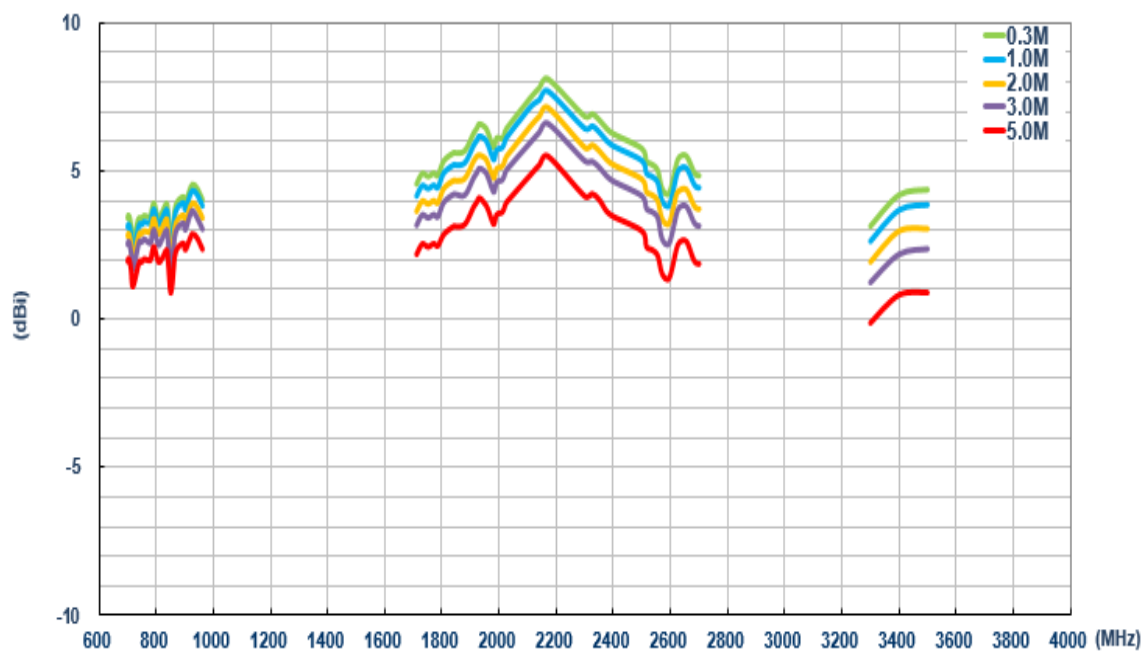


6.5.9. Peak Gain (LTE MIMO_2)

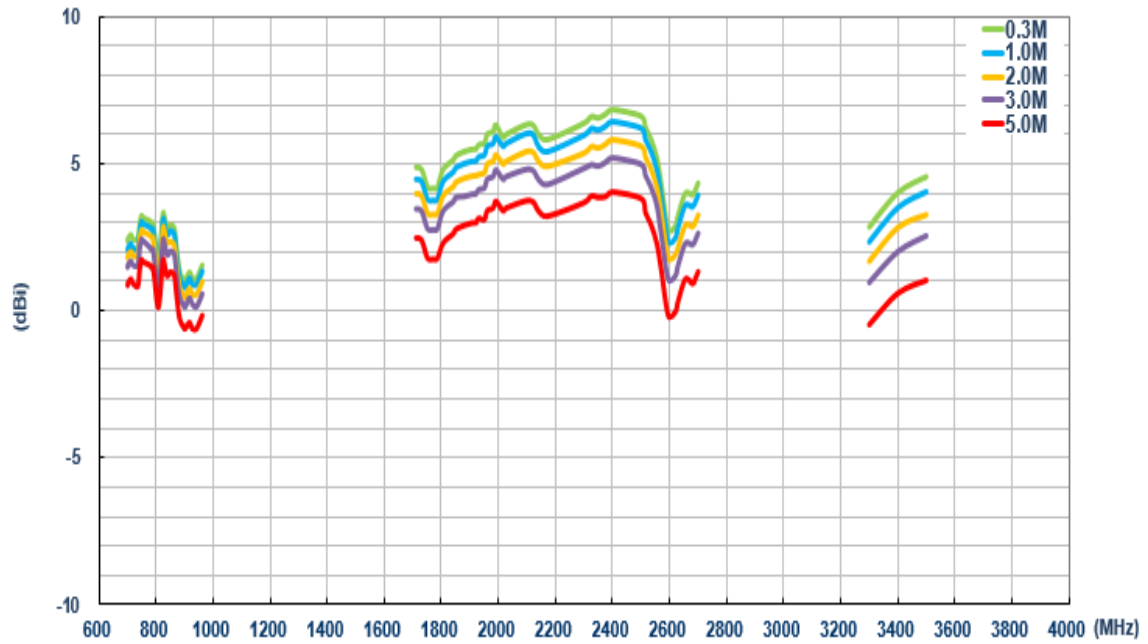


6.6. On glass (Wi-Fi)


6.6.1. Return Loss (Wi-Fi _MIMO_1)

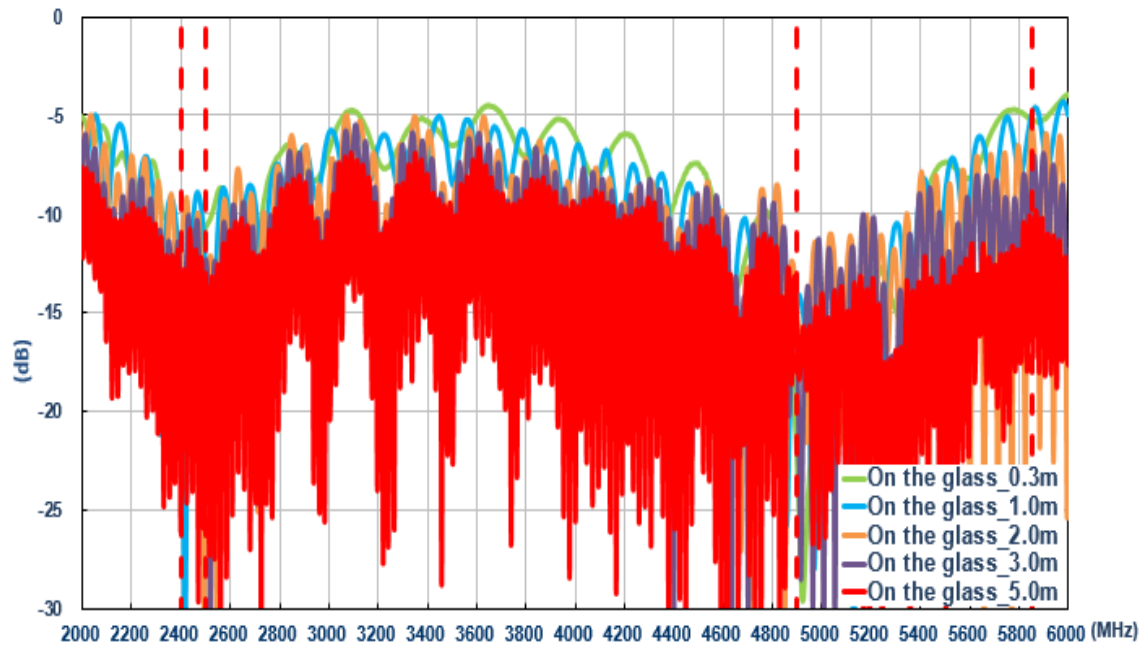


6.6.2. Return Loss (Wi-Fi _MIMO_2)

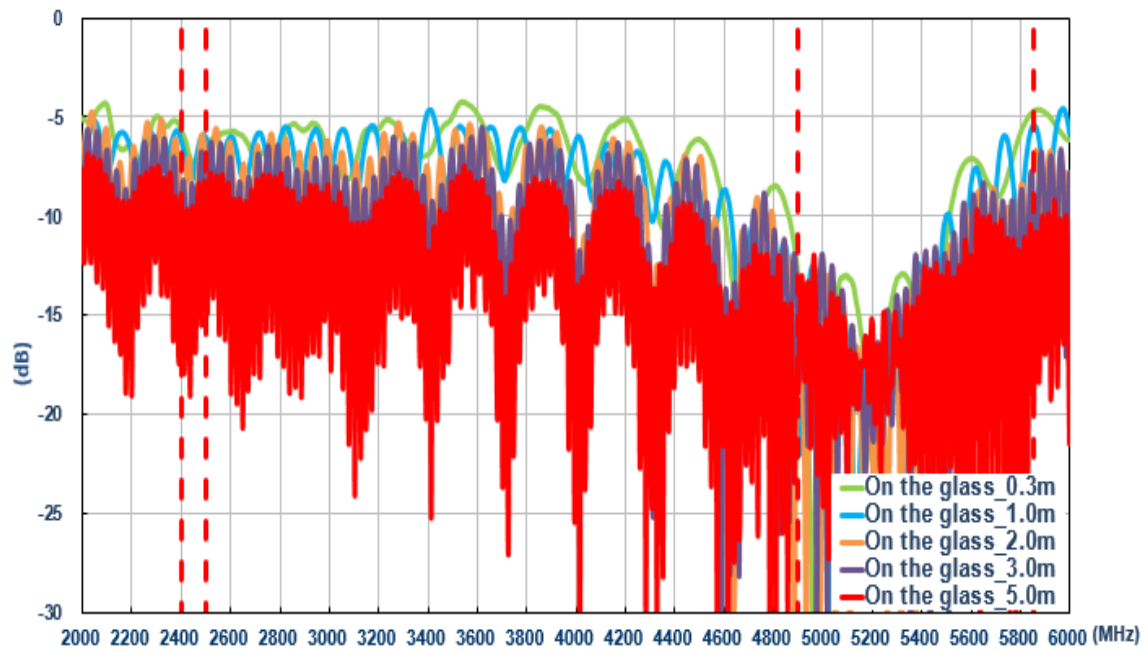


6.6.3. Isolation (Wi-Fi)

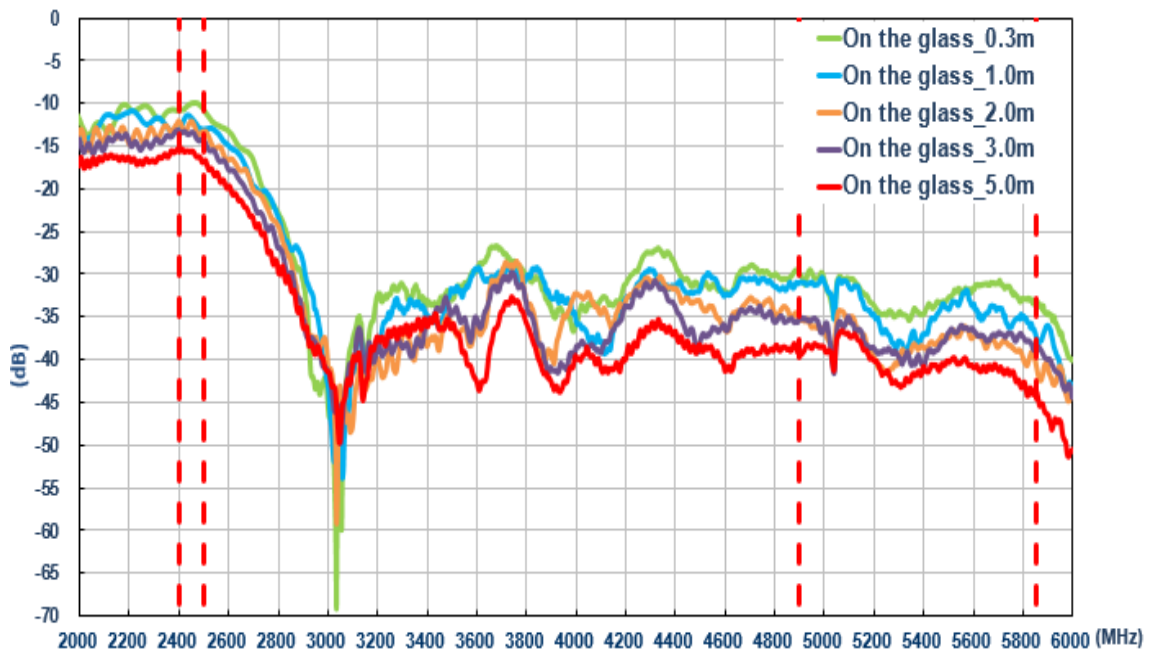


6.6.4. Efficiency (Wi-Fi _MIMO_1)

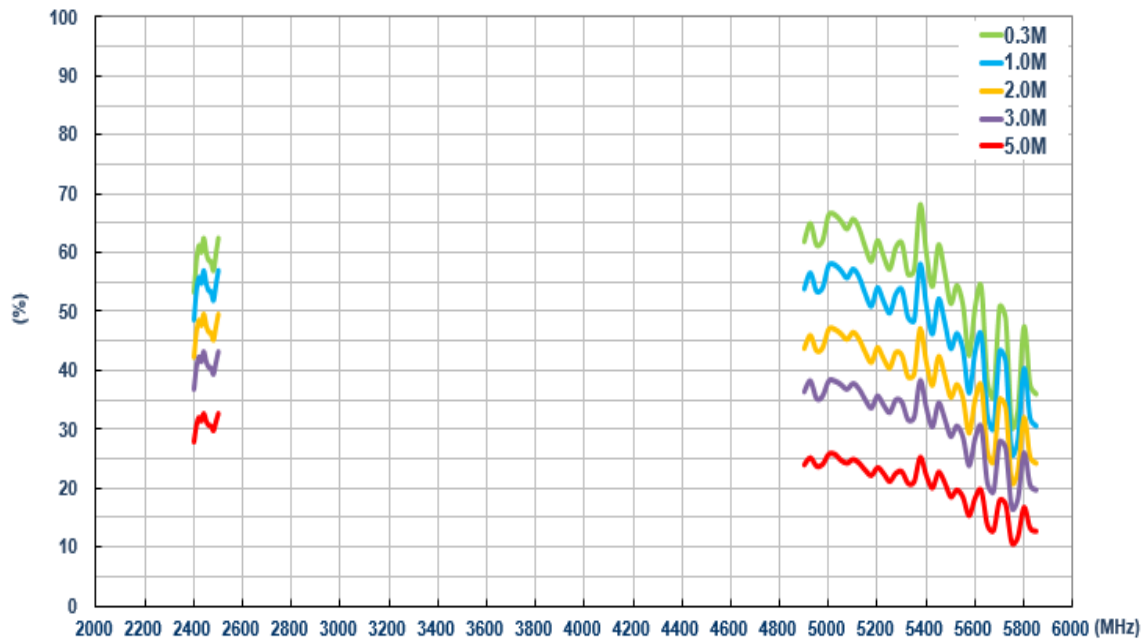


6.6.5. Efficiency (Wi-Fi_MIMO_2)

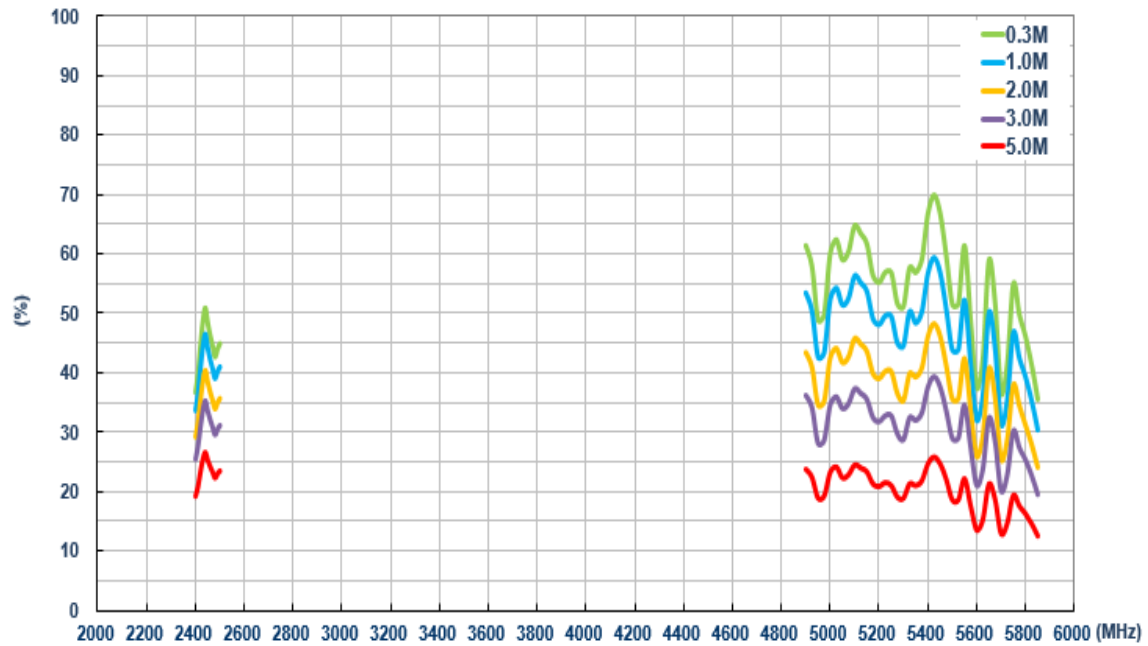


6.6.6. Average Gain (Wi-Fi_MIMO_1)

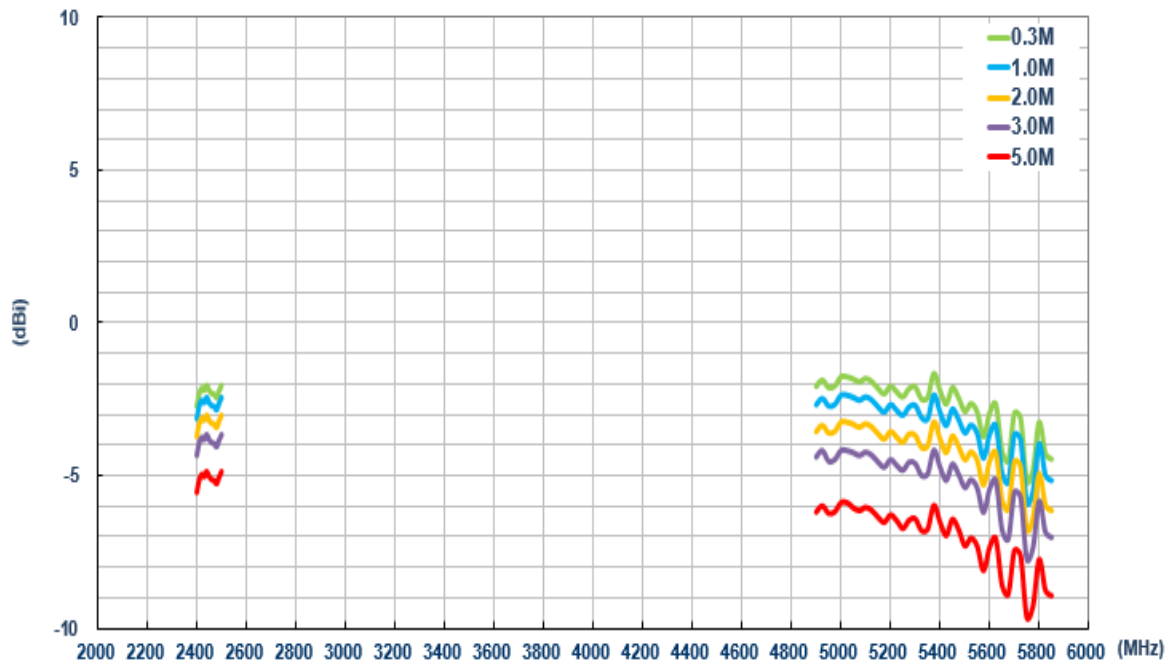


6.6.7. Average Gain (Wi-Fi _MIMO_2)

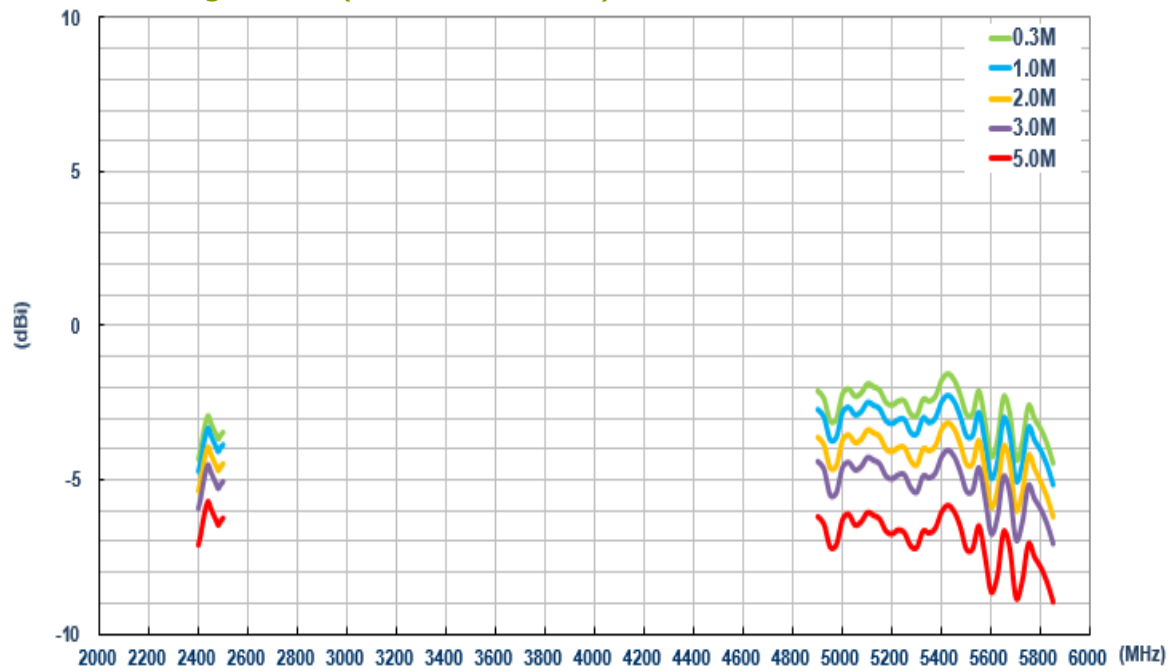

6.6.8. Peak Gain (Wi-Fi _MIMO_1)

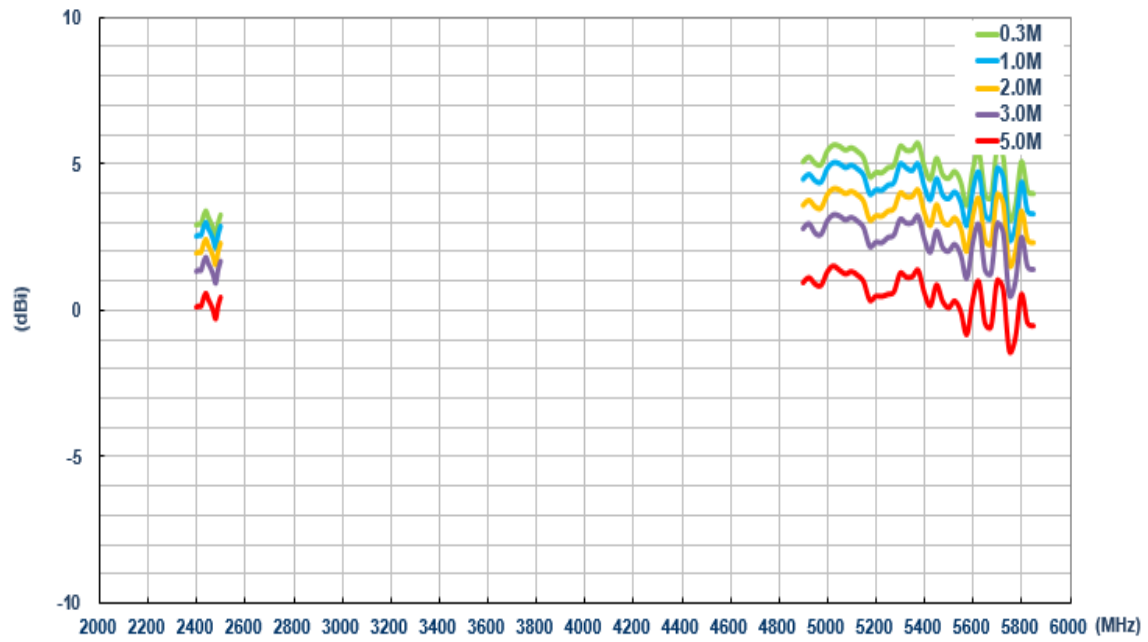


6.6.9. Peak Gain (Wi-Fi _MIMO_2)

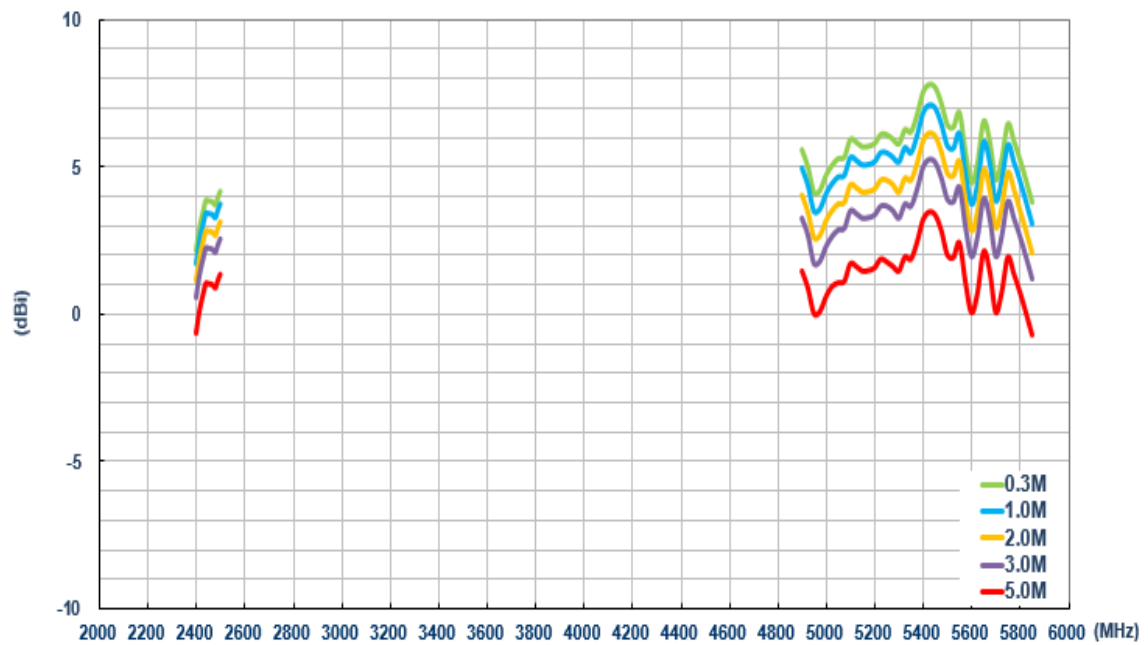


6.7. On metal (LTE)


6.7.1. Return Loss (LTE_MIMO_1)

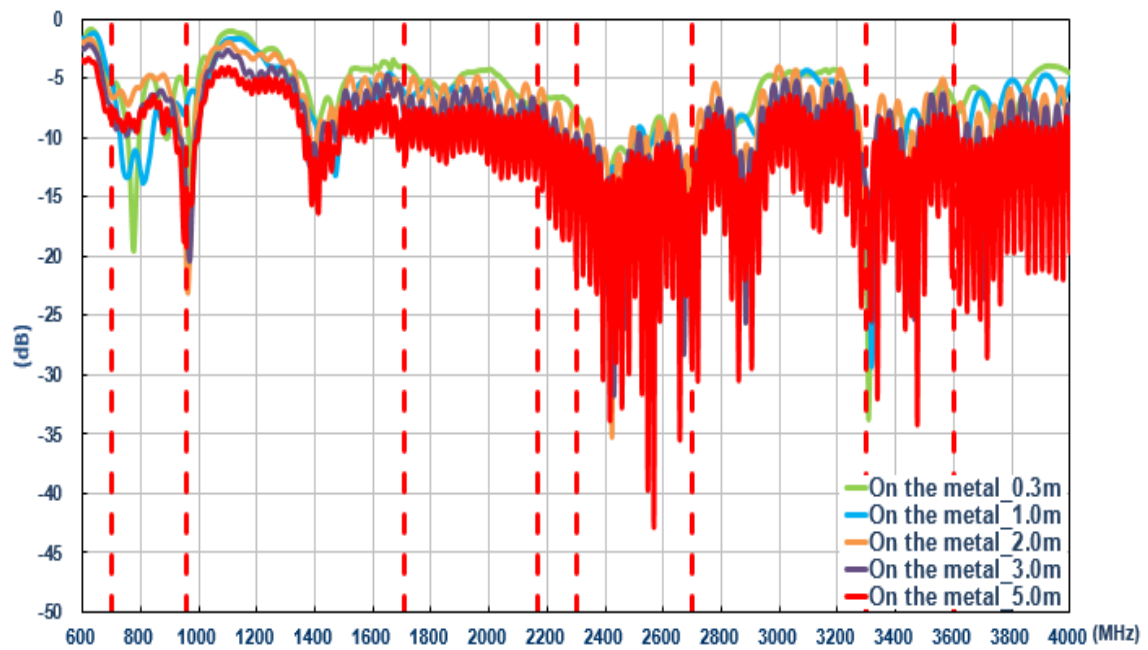


6.7.2. Return Loss (LTE_MIMO_2)

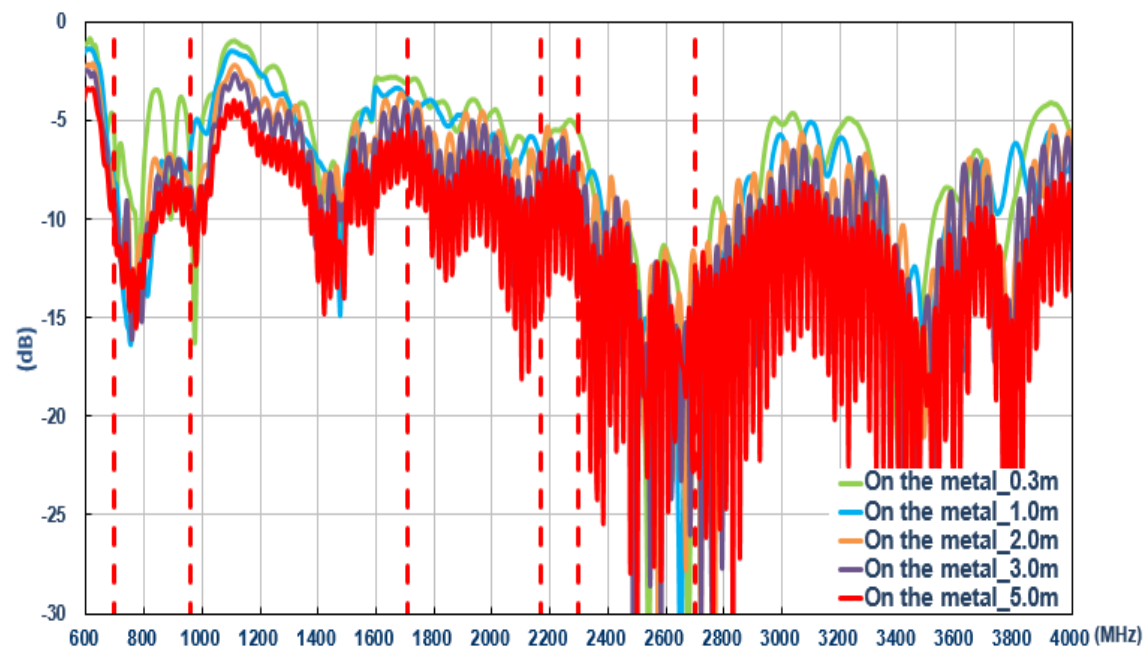


6.7.3. Isolation (LTE antenna)

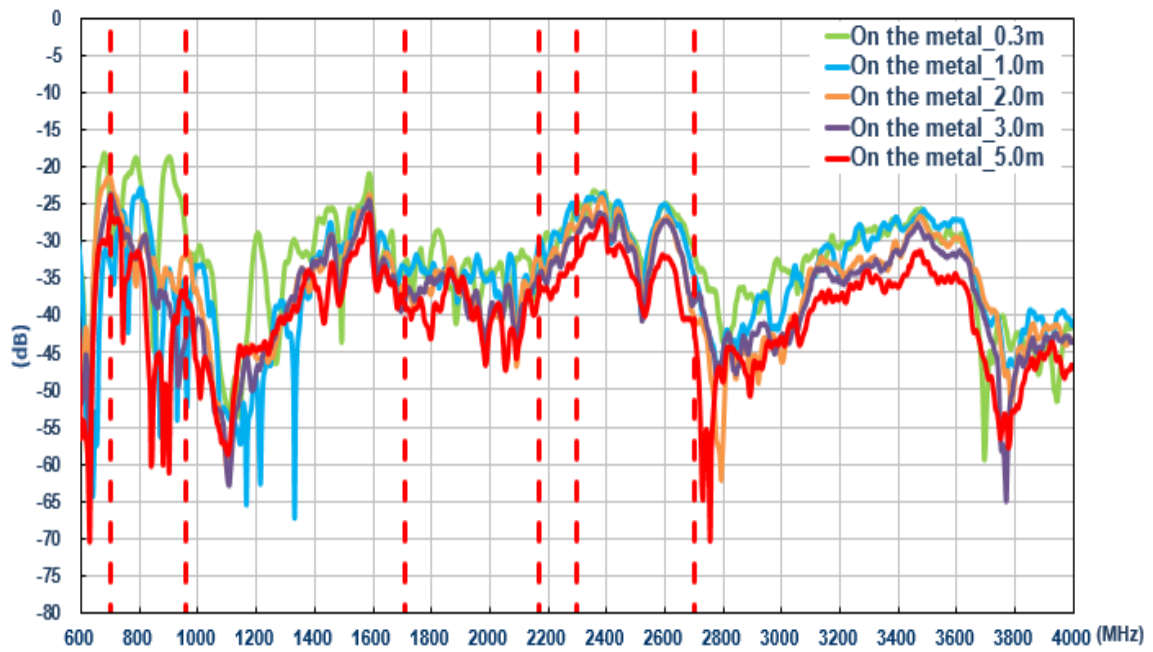


6.7.4. Efficiency (LTE_MIMO_1)

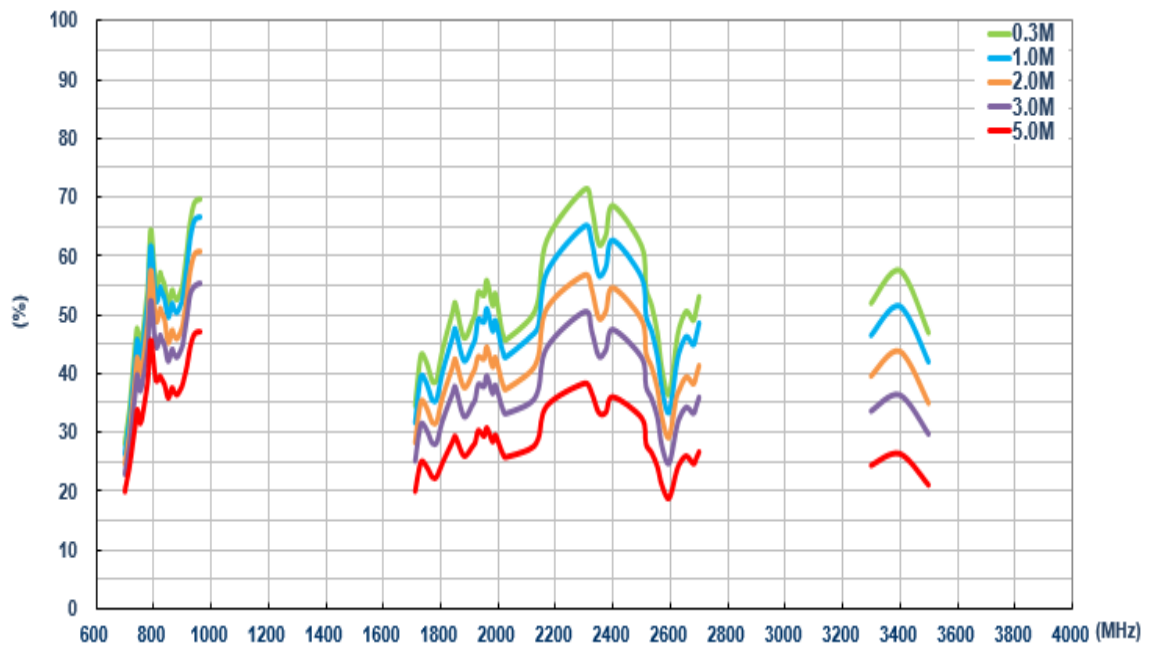


6.7.5. Efficiency (LTE_MIMO_2)

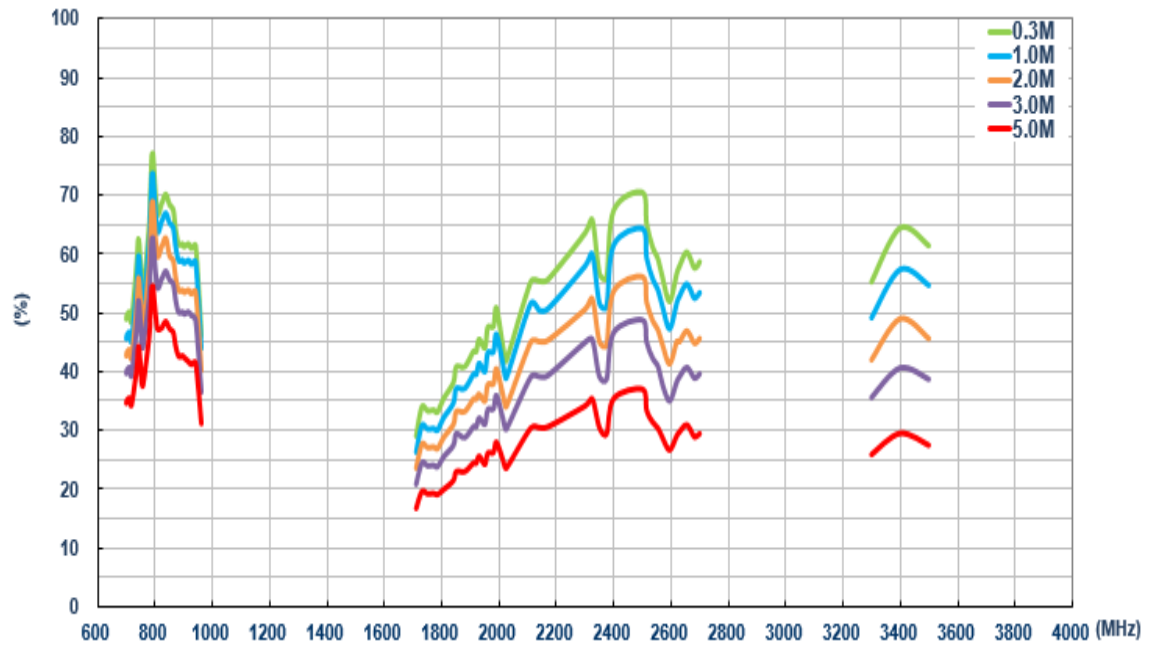


6.7.6. Average Gain (LTE_MIMO_1)

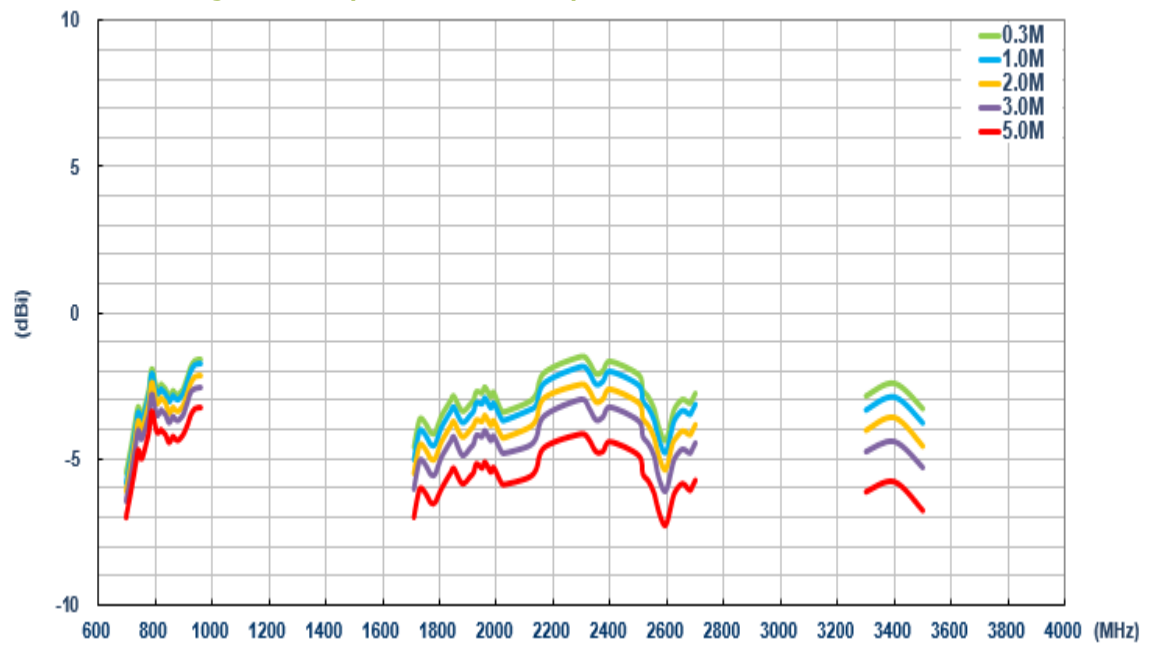


6.7.7. Average Gain (LTE_MIMO_2)

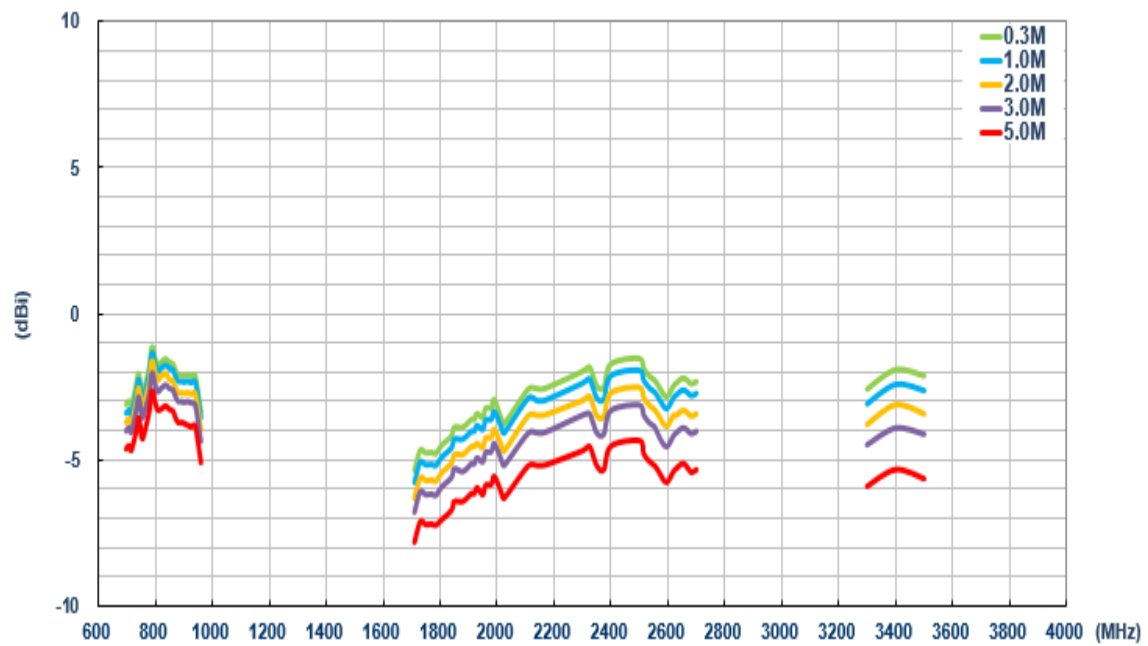

6.7.8. Peak Gain (LTE_MIMO_1)

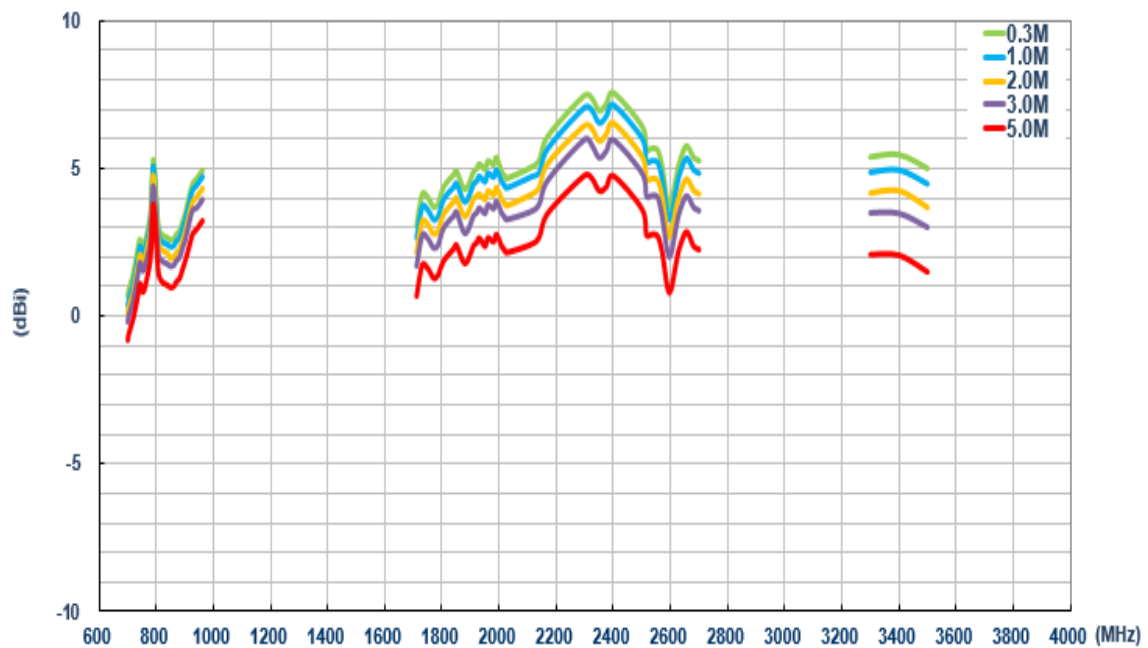


6.7.9. Peak Gain (LTE_MIMO_2)

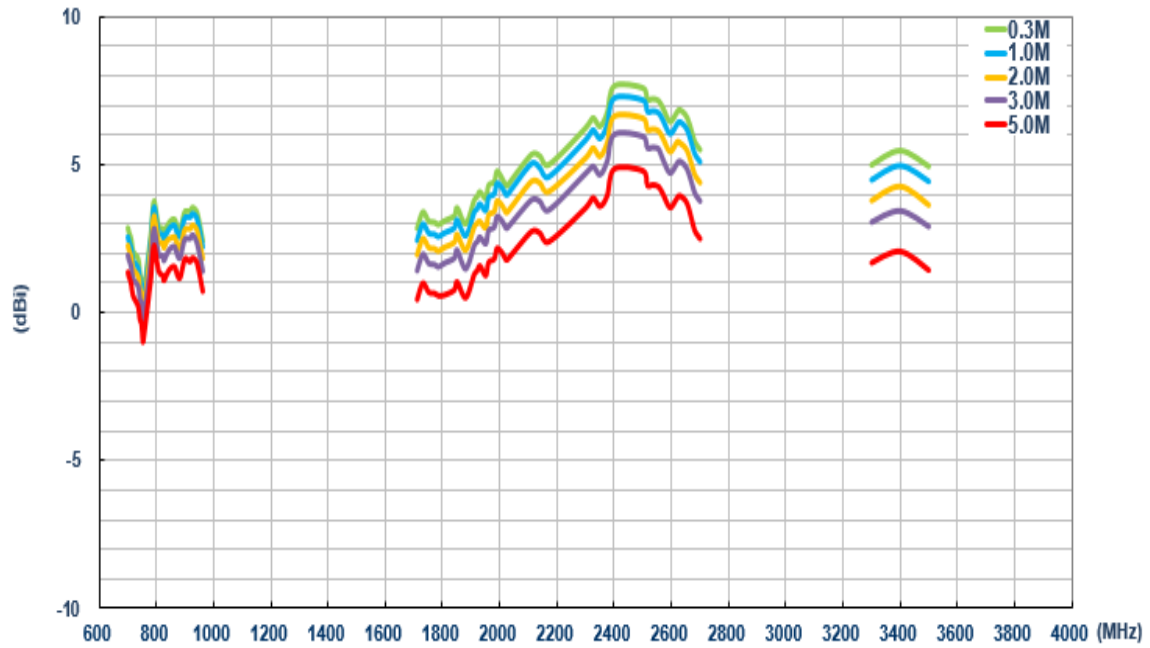


6.8. On metal (Wi-Fi)


6.8.1. Return Loss (Wi-Fi_MIMO_1)

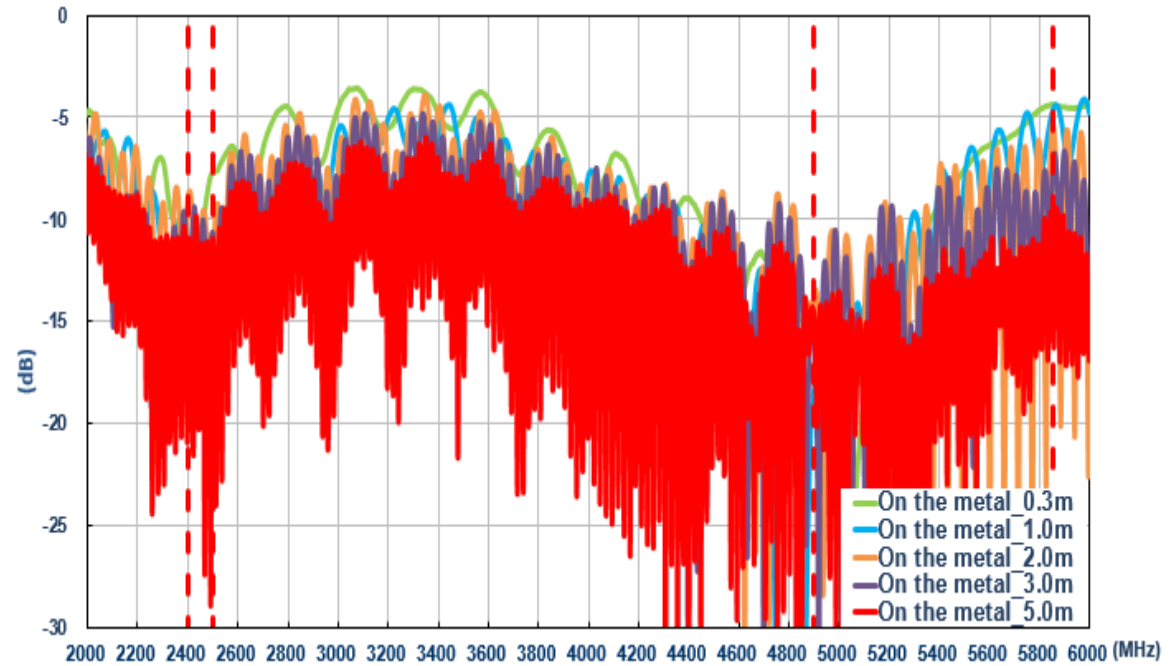


6.8.2. Return Loss (Wi-Fi_MIMO_2)

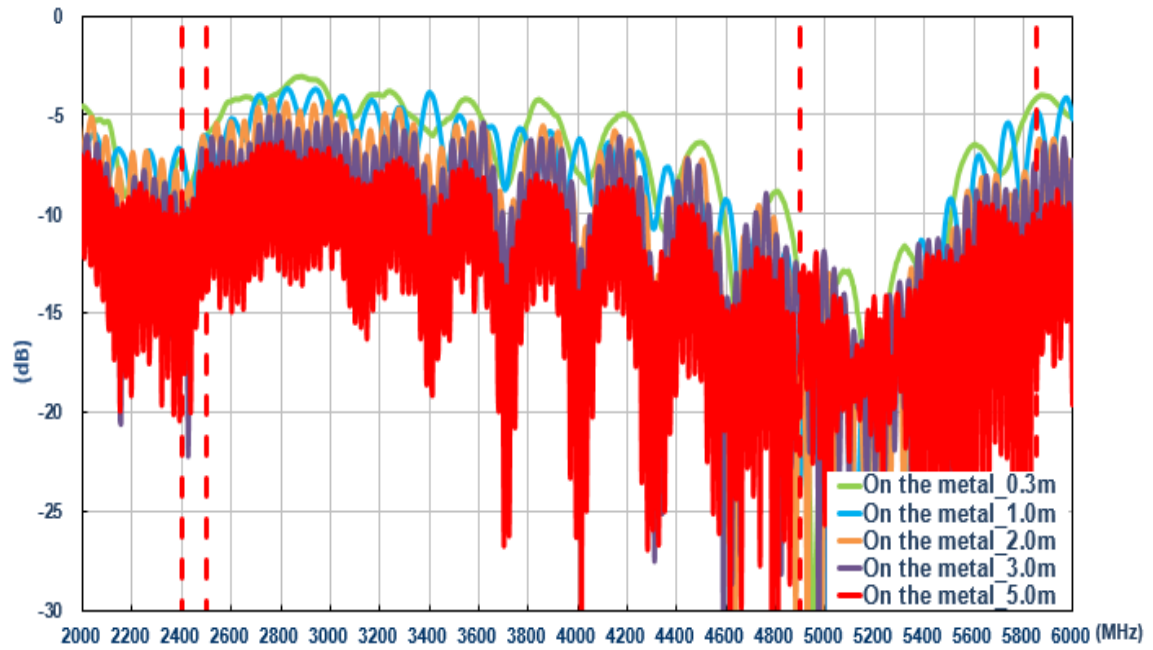


6.8.3. Isolation (Wi-Fi)

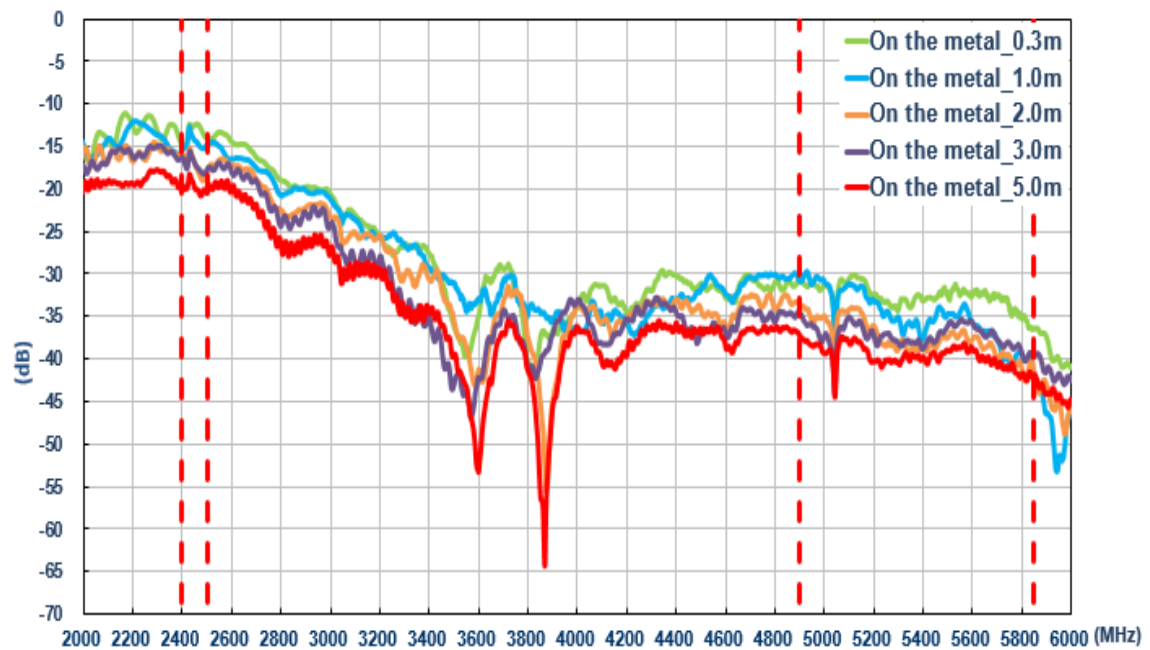


6.8.4. Efficiency (Wi-Fi_MIMO_1)

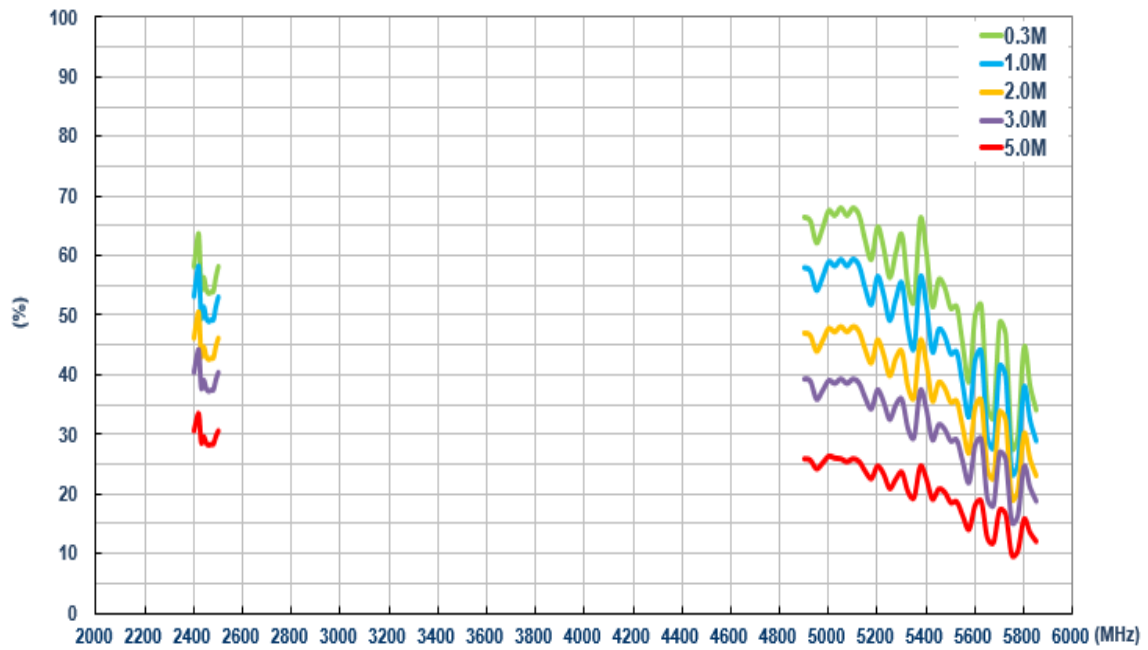


6.8.5. Efficiency (Wi-Fi_MIMO_2)

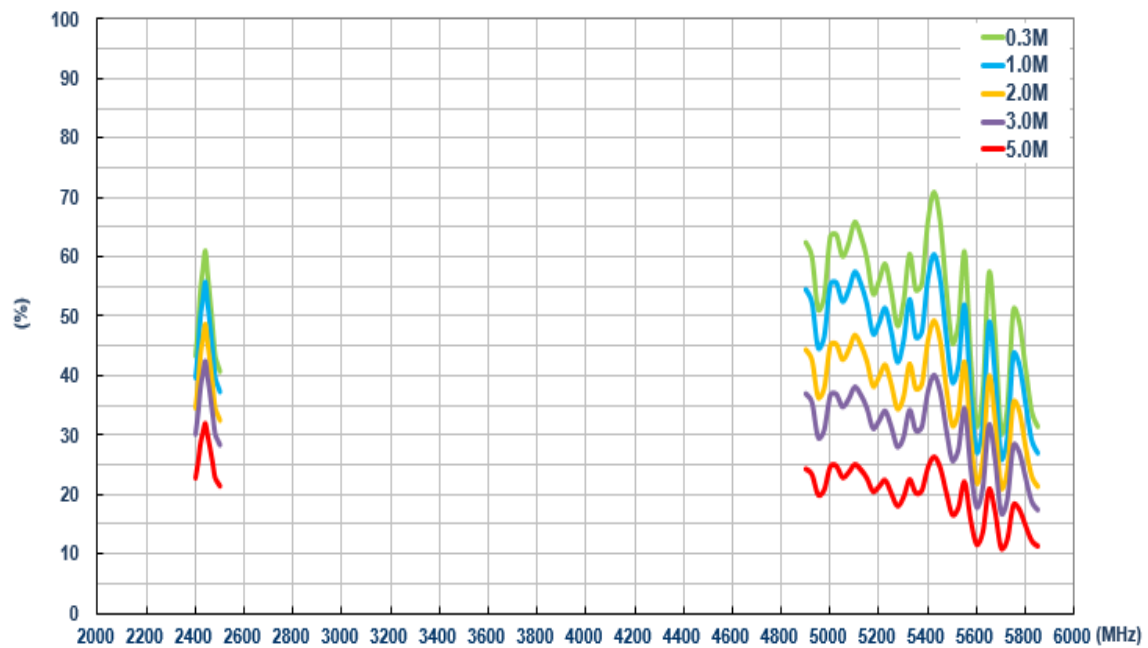


6.8.6. Average Gain (Wi-Fi_MIMO_1)

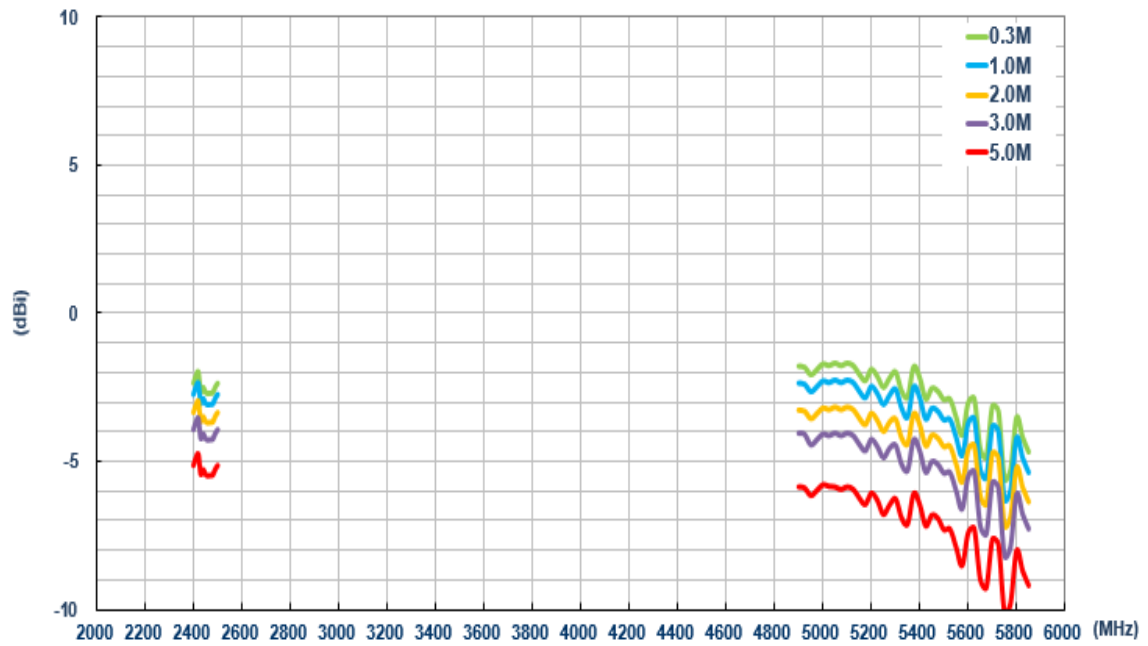


6.8.7. Average Gain (Wi-Fi_MIMO_2)

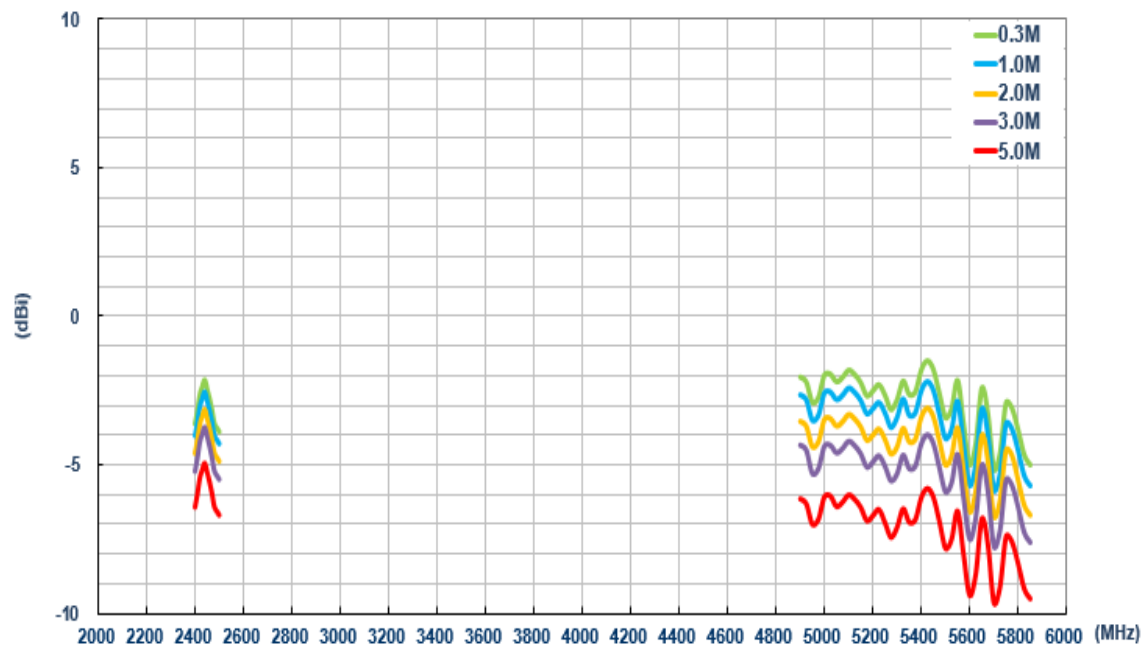

6.8.8. Peak Gain (Wi-Fi_MIMO_1)

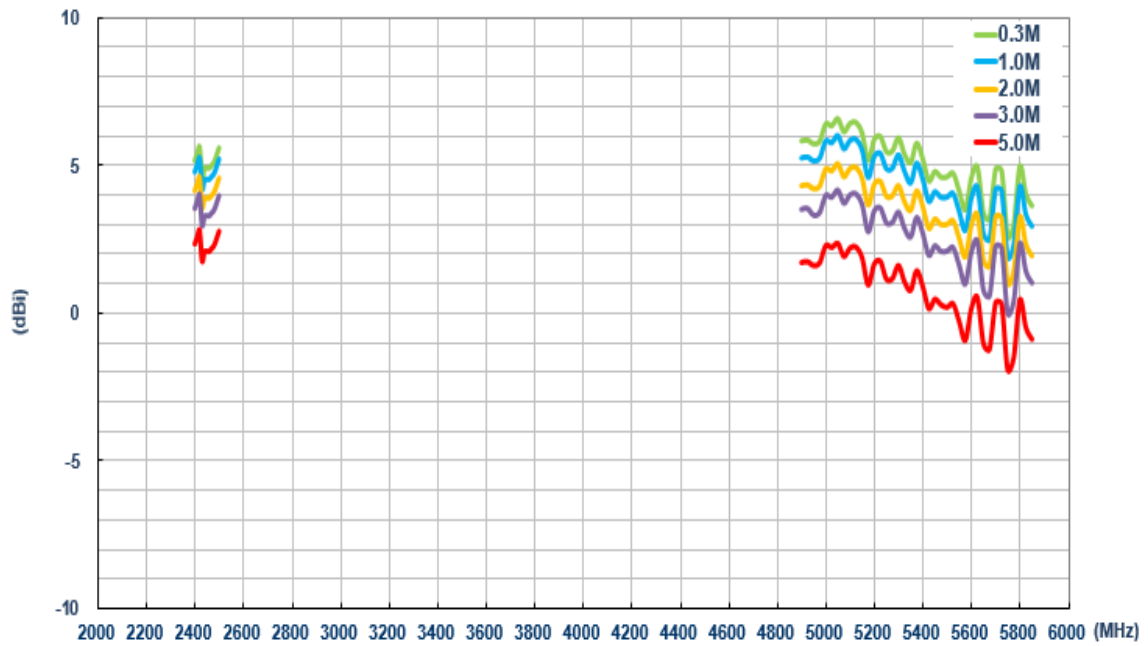


6.8.9. Peak Gain (Wi-Fi_MIMO_2)

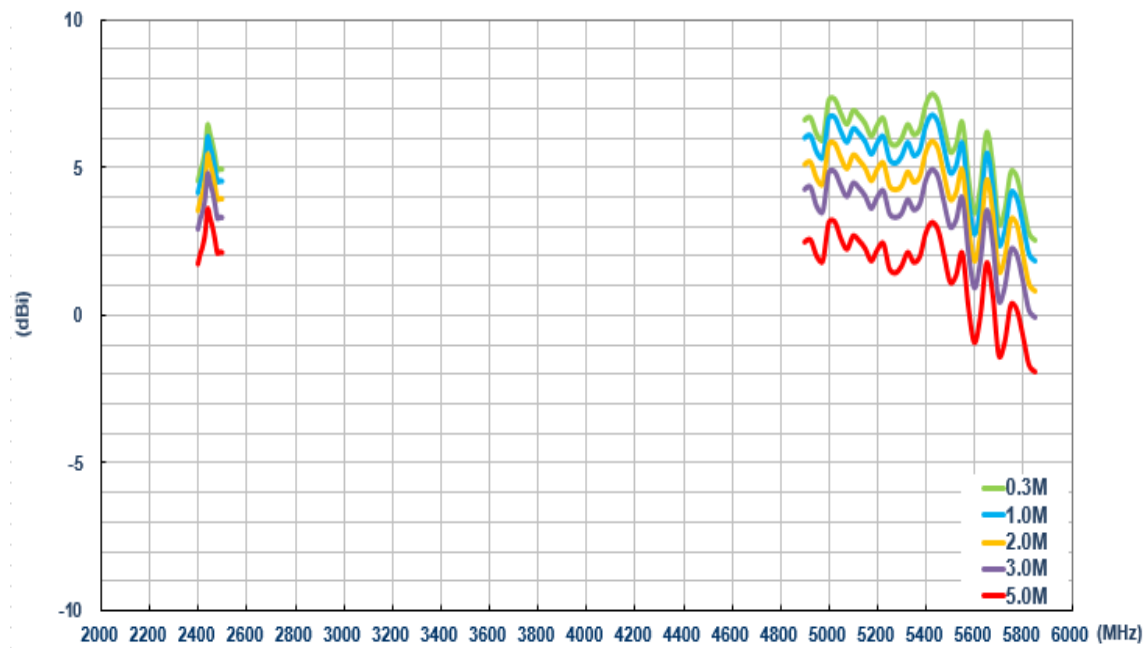


6.9. On the wall (LTE)


6.9.1. Return Loss (LTE_MIMO_1)

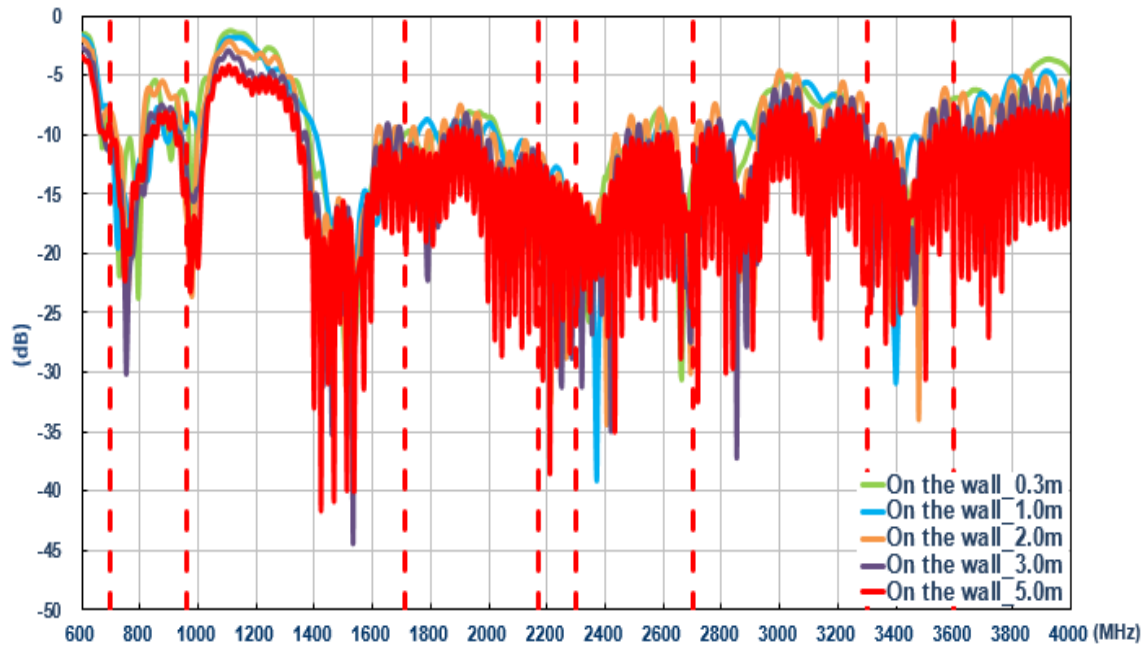


6.9.2. Return Loss (LTE_MIMO_2)

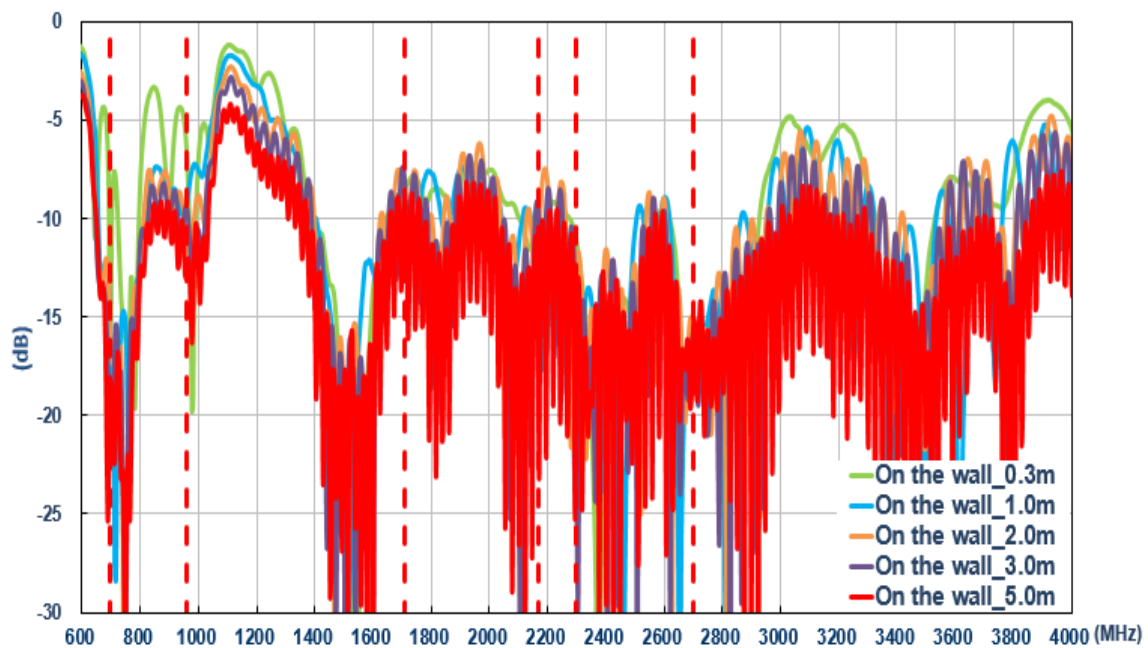


6.9.3. Isolation (LTE antenna)

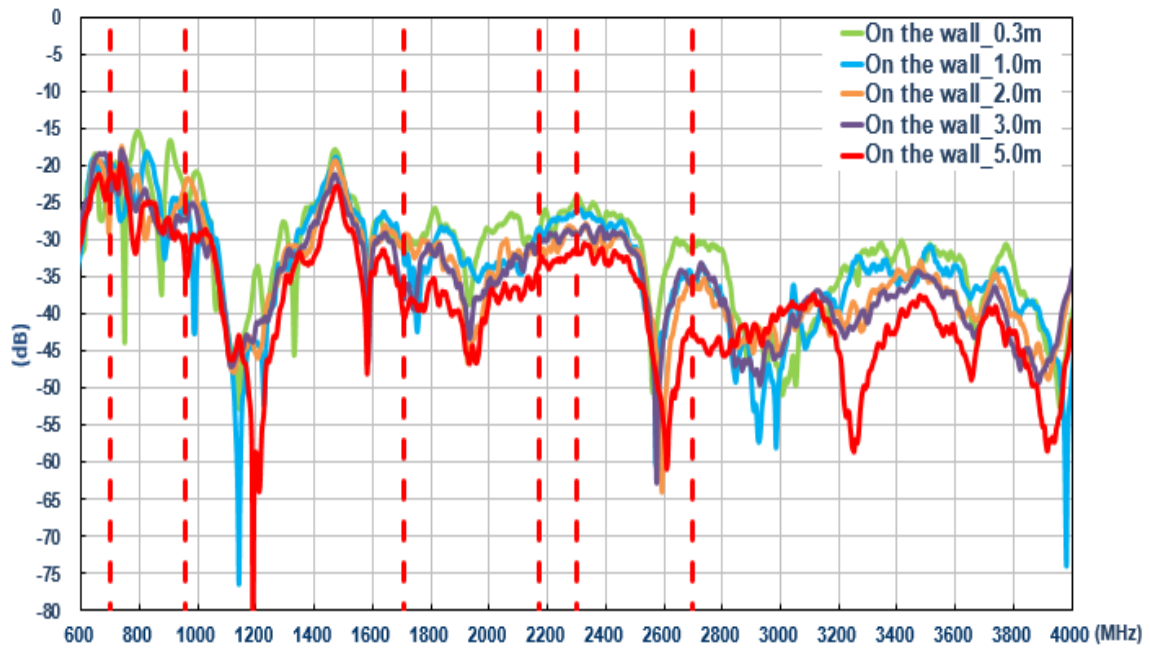


6.9.4. Efficiency (LTE_MIMO_1)

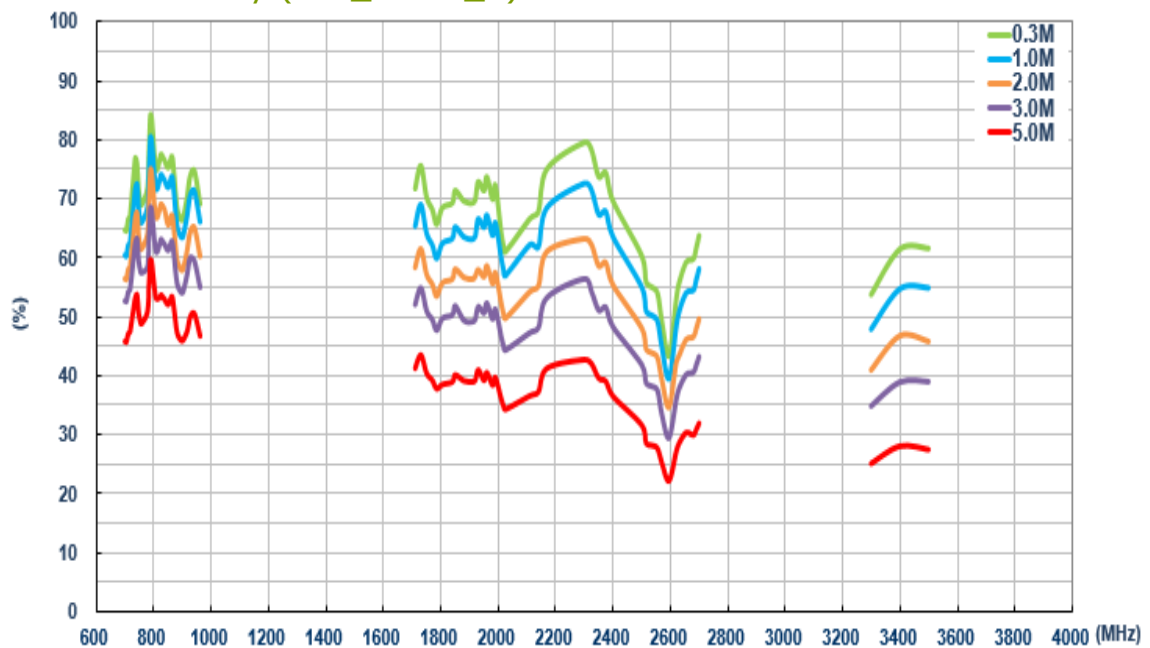


6.9.5. Efficiency (LTE_MIMO_2)

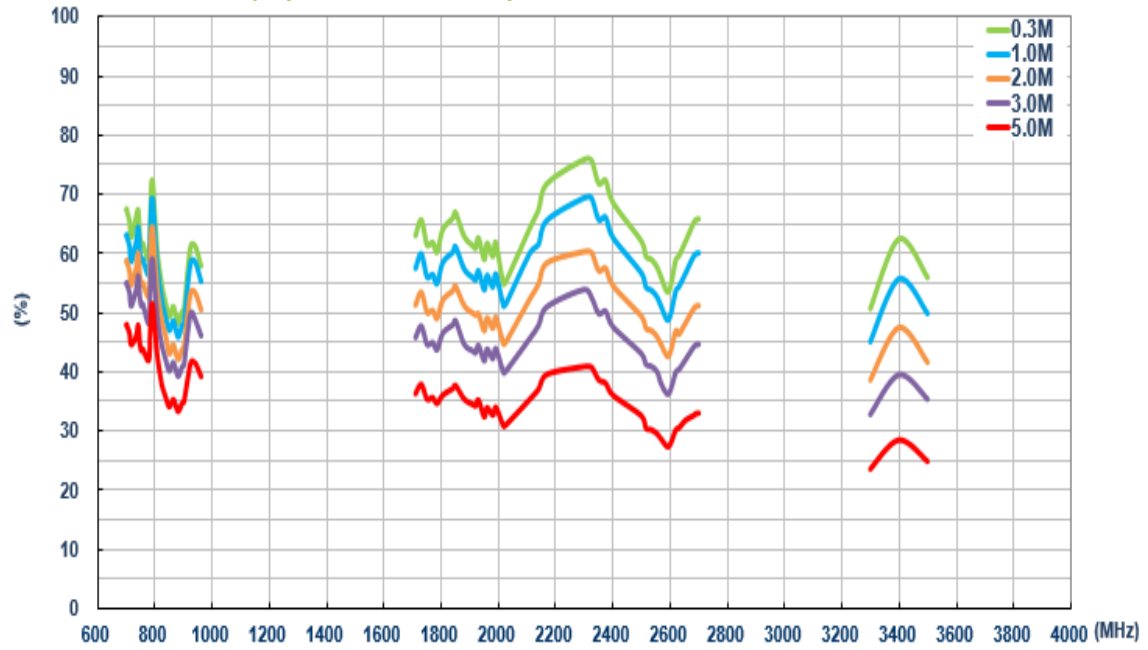


6.9.6. Average Gain (LTE_MIMO_1)

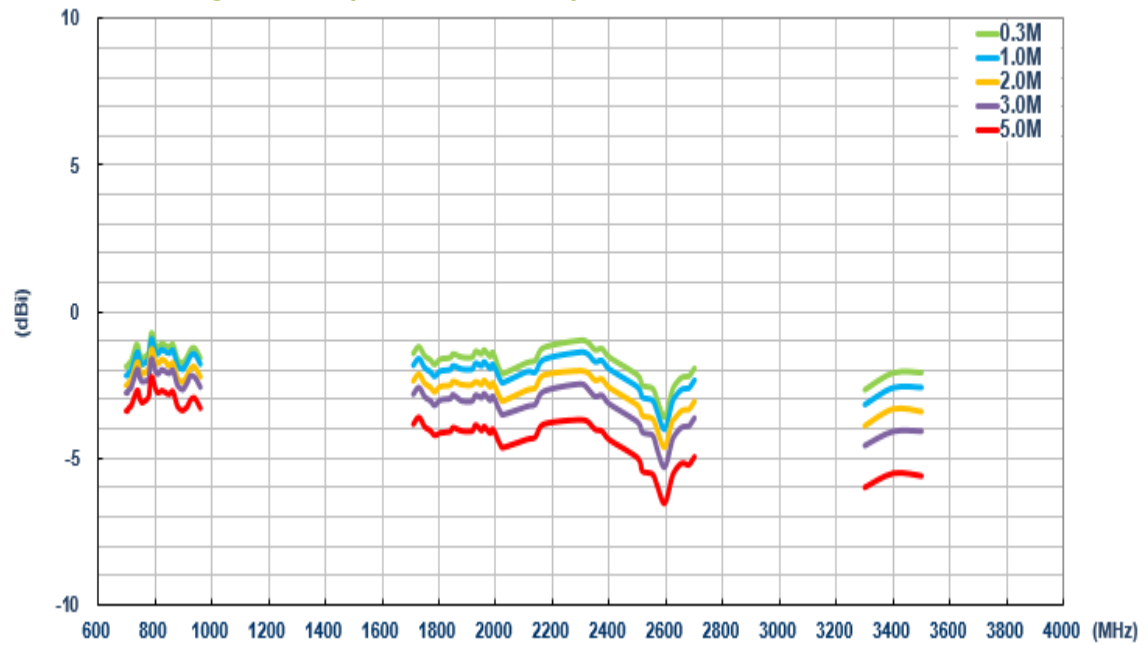


6.9.7. Average Gain (LTE_MIMO_2)

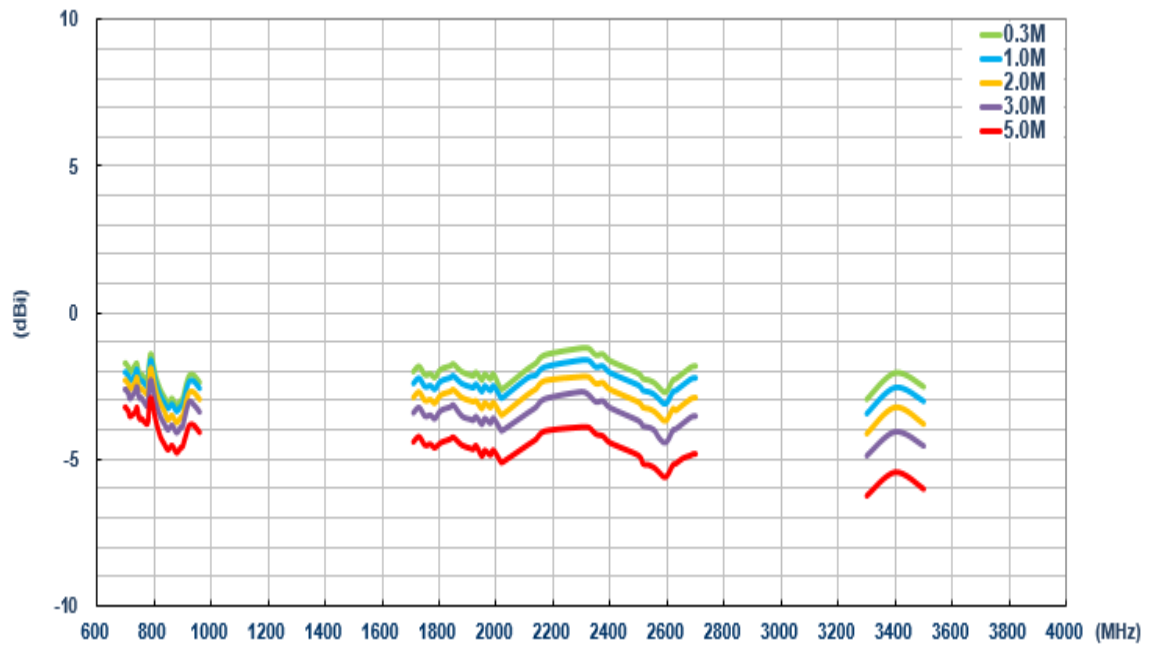

6.9.8. Peak Gain (LTE_MIMO_1)

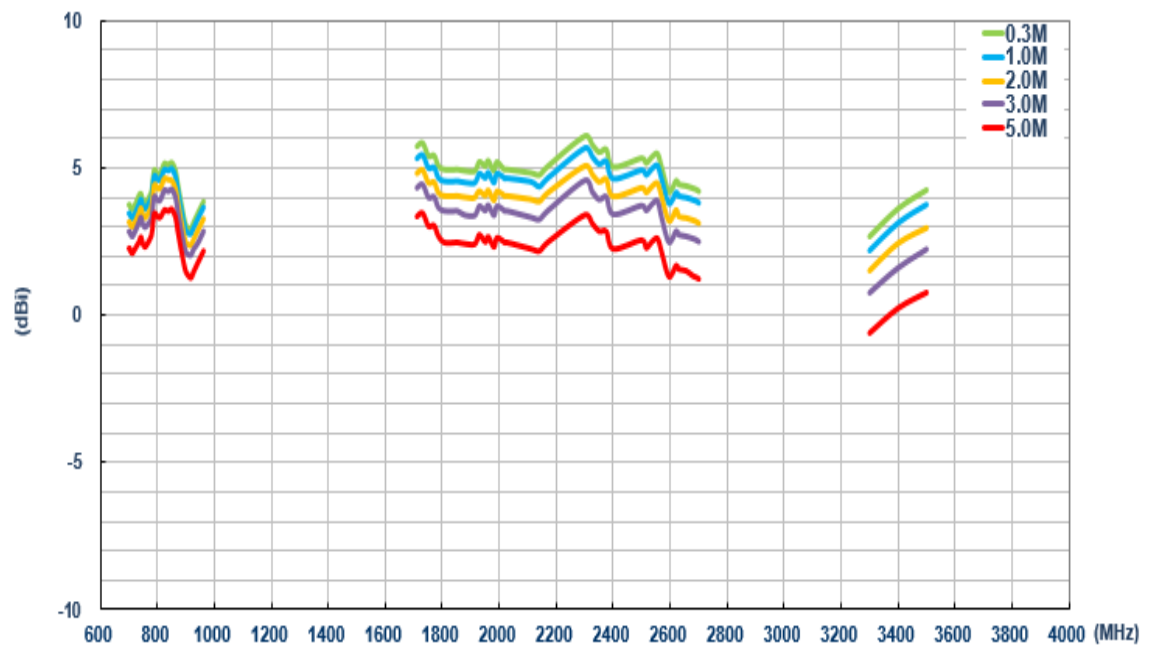


6.1.9 Peak Gain (LTE_MIMO_2)

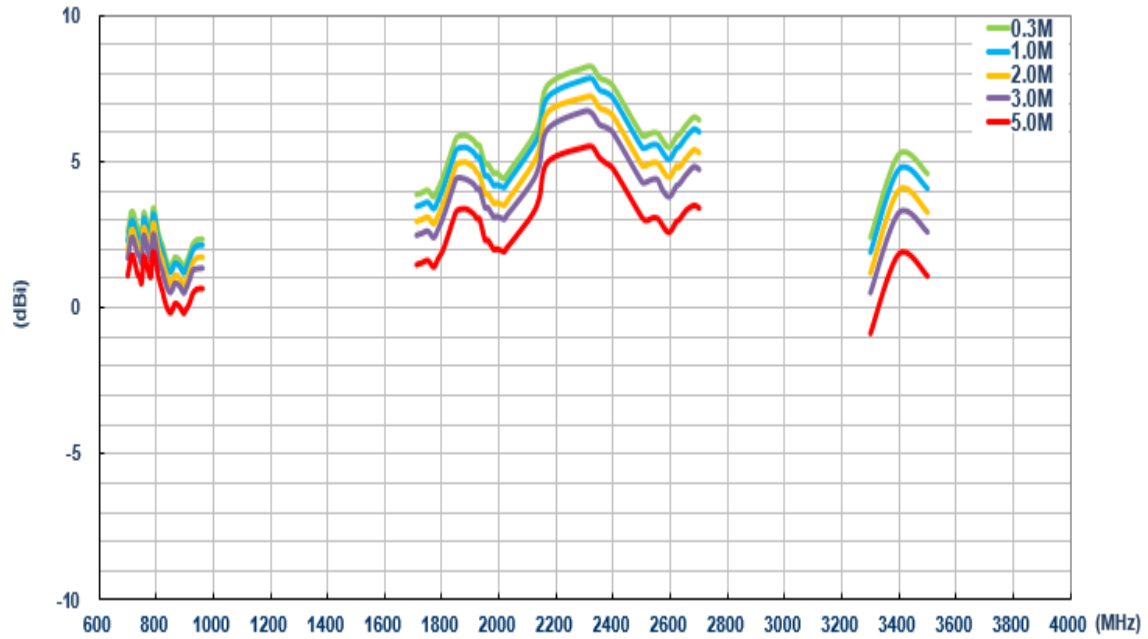


6.10. On the wall (Wi-Fi)


6.10.1. Return Loss (Wi-Fi_MIMO_1)

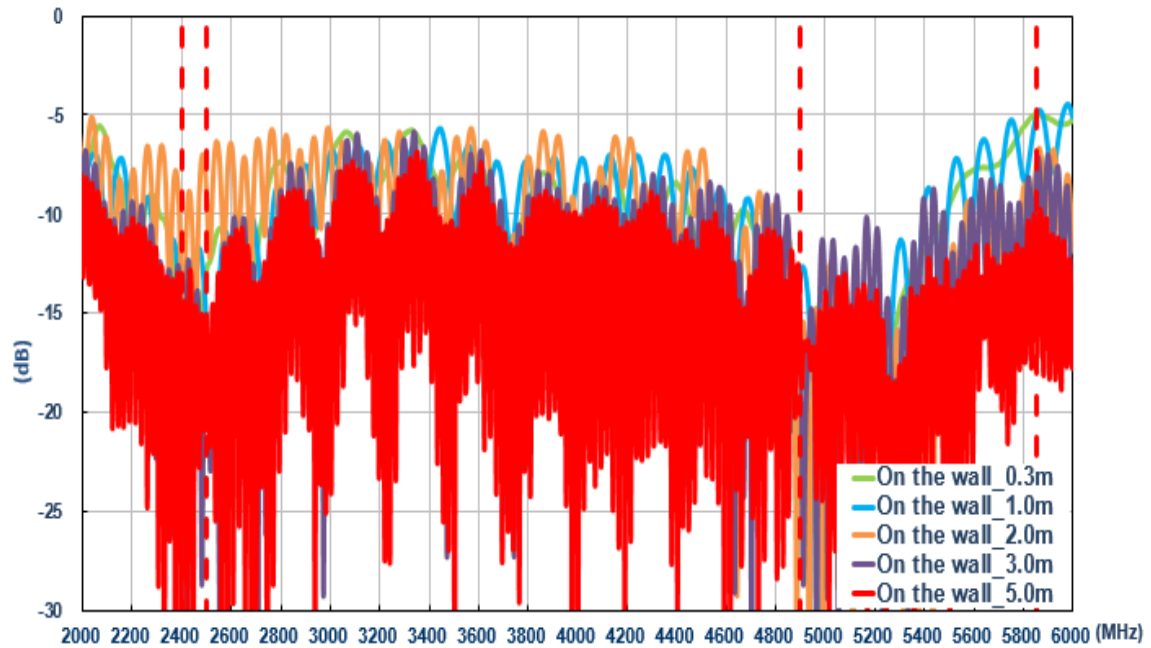


6.10.2. Return Loss (Wi-Fi_MIMO_2)

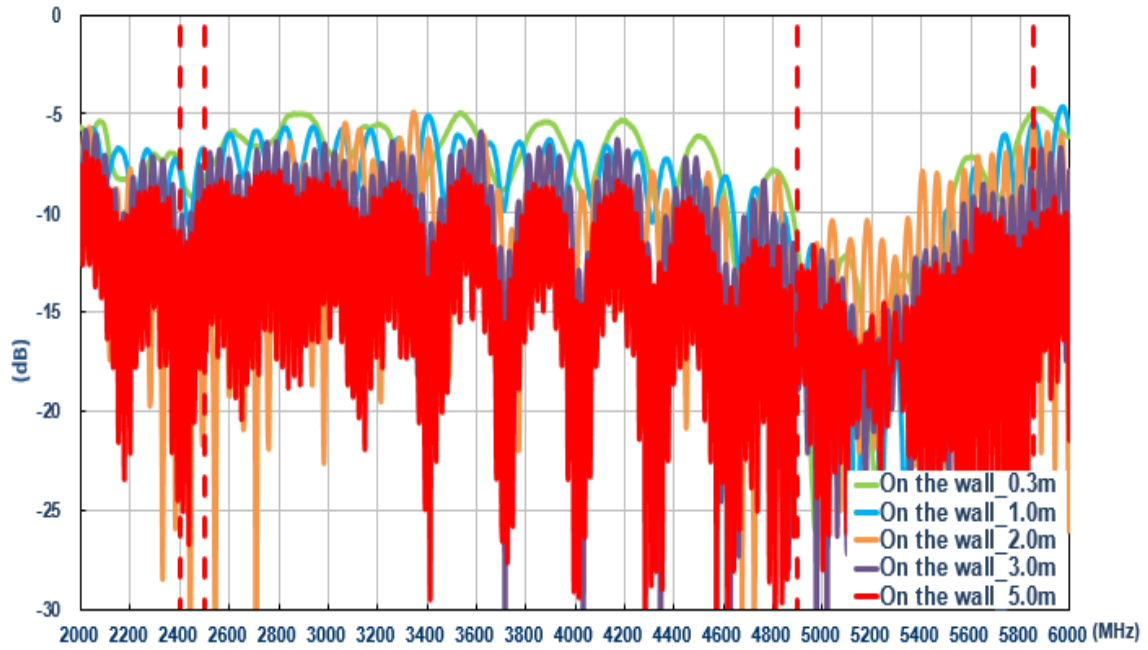


6.10.3. Isolation (Wi-Fi)

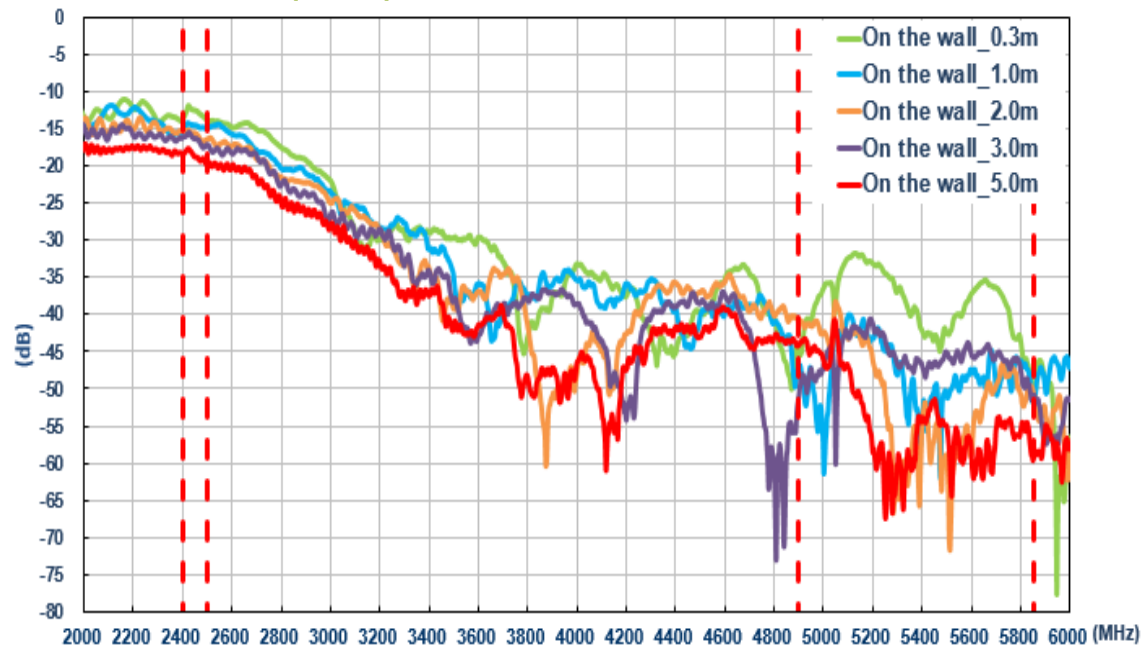


6.10.4. Efficiency (Wi-Fi_MIMO_1)

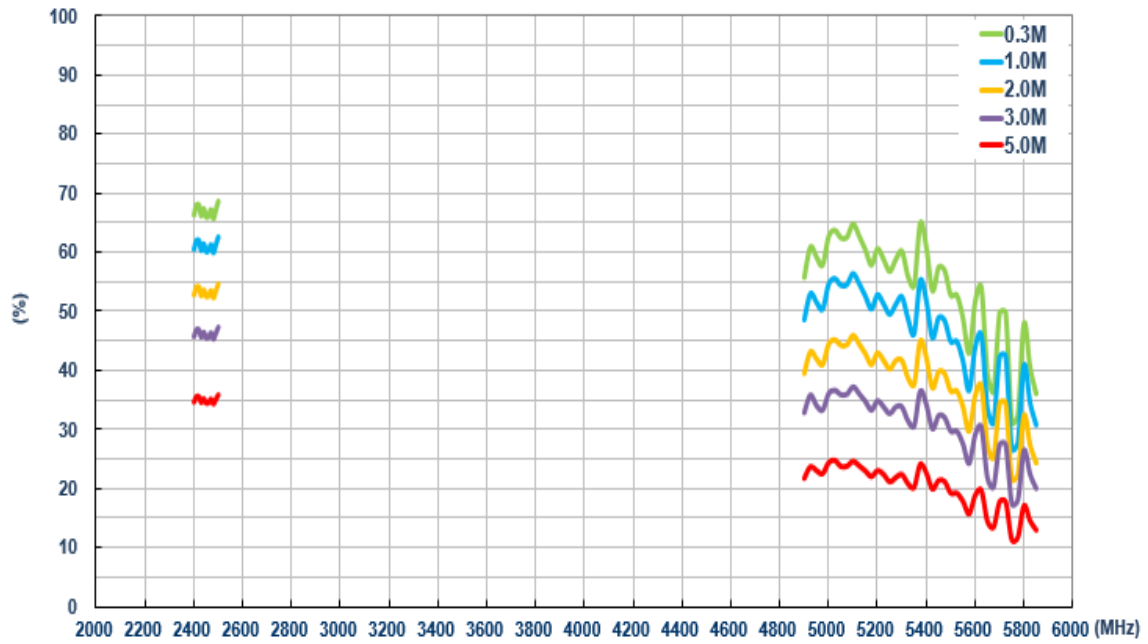


6.10.5. Efficiency (Wi-Fi_MIMO_2)

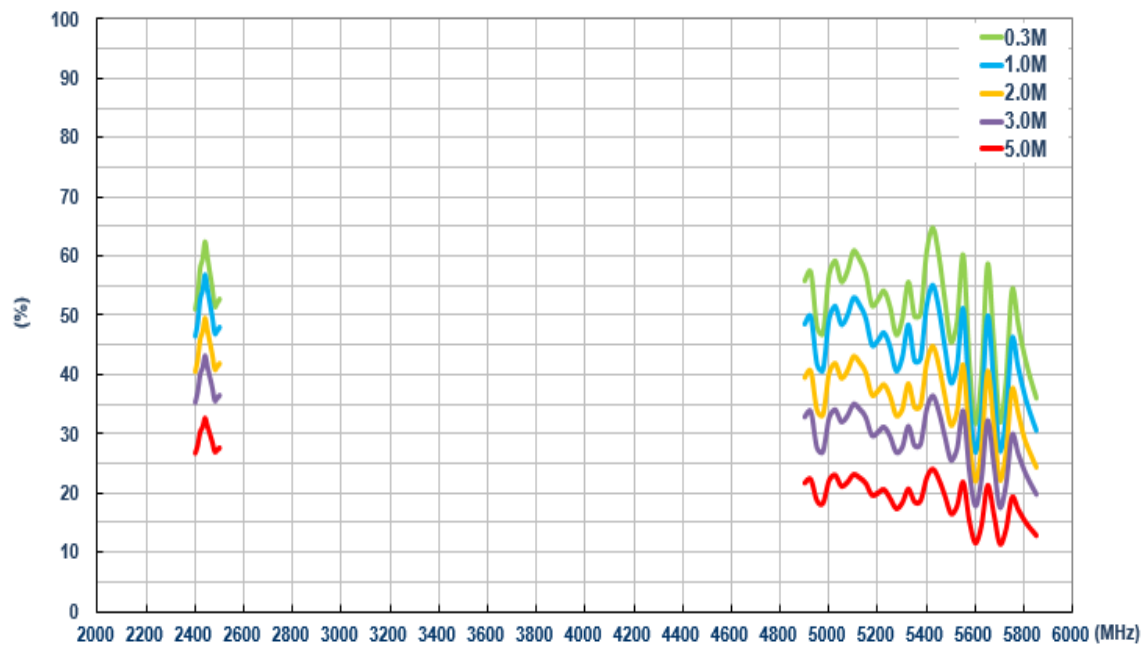


6.10.6. Average Gain (Wi-Fi_MIMO_1)

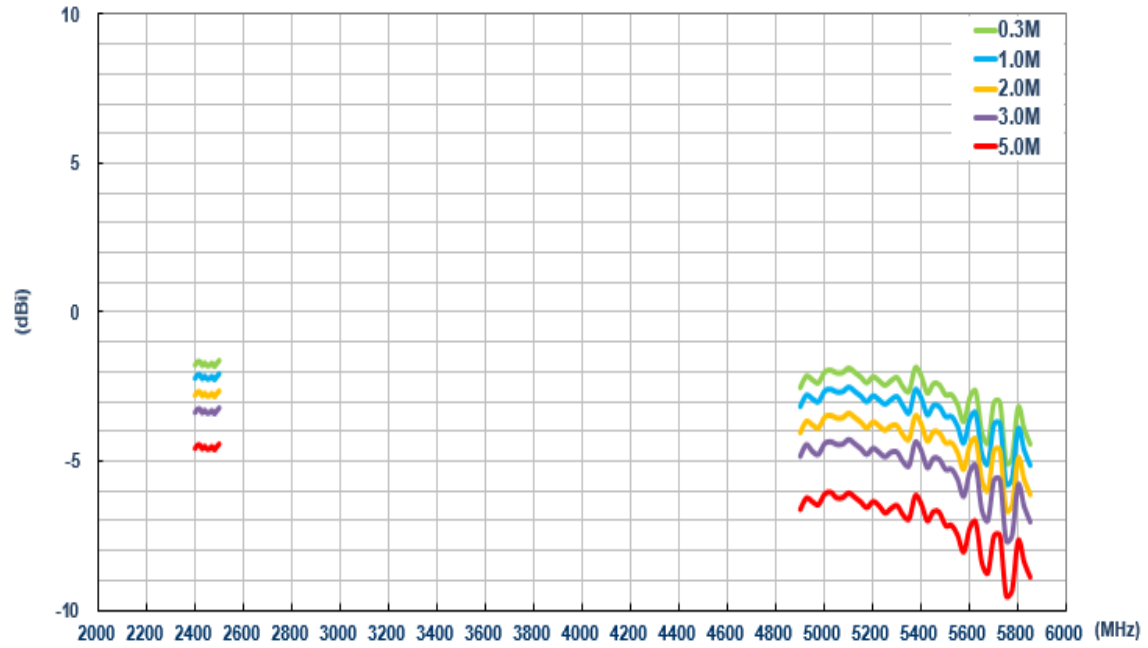


6.10.7. Average Gain (Wi-Fi_MIMO_2)

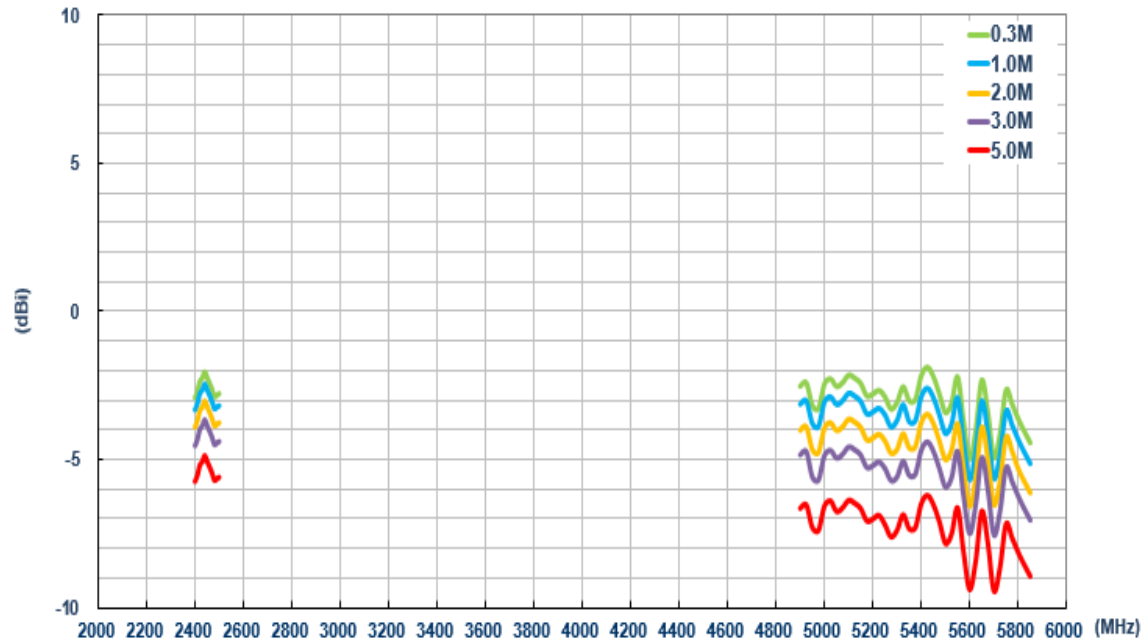

6.10.8. Peak Gain (Wi-Fi_MIMO_1)

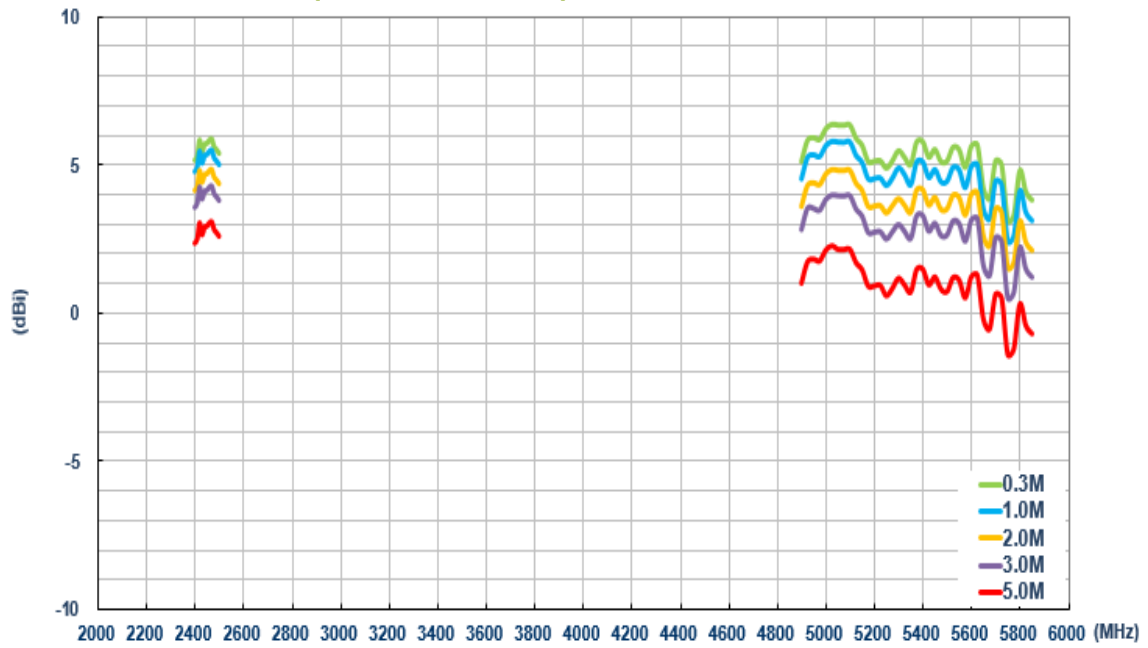

6.10.9. Peak Gain (Wi-Fi_MIMO_2)

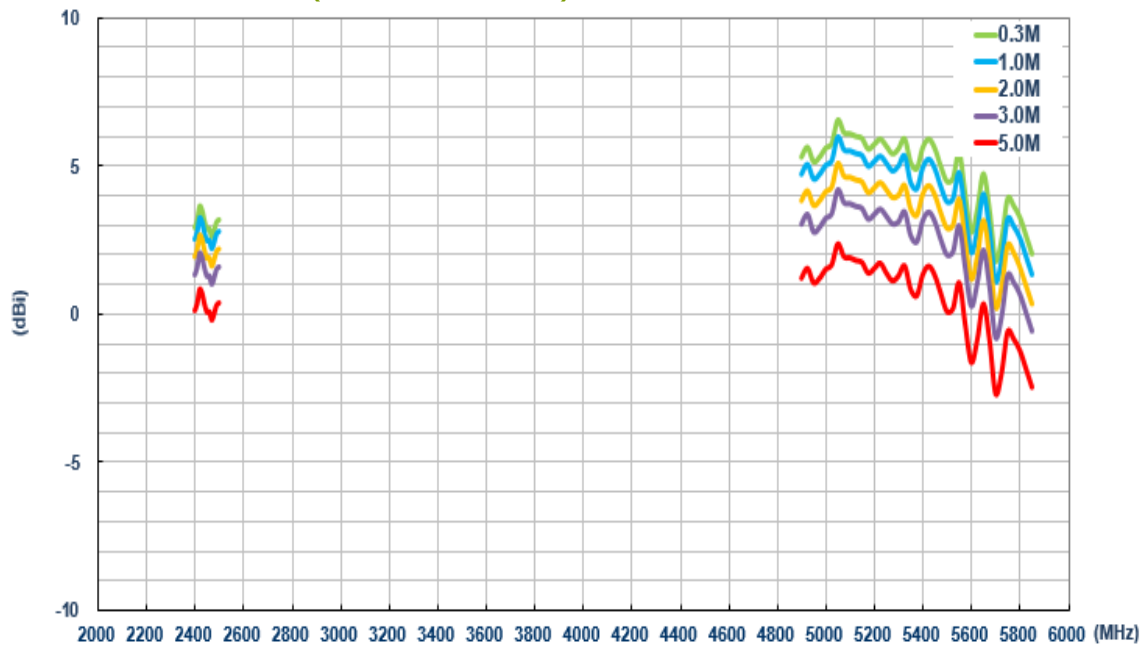

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.