

ET130 DIGITAL LIGHT METER AUTO-RANGING


Easy-to-use precision light meter measures illuminance levels in Foot Candles (FC) and Lux



CE FC

KLEIN TOOLS 
For Professionals... Since 1857™

ET130 Digital Light Meter Auto-Ranging

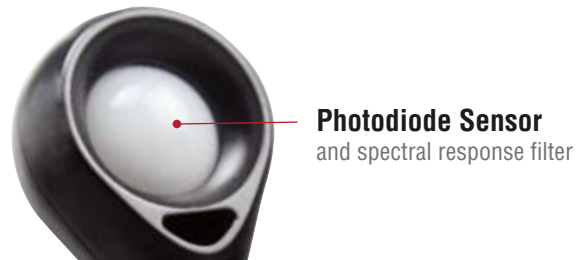

Photodiode Sensor
and spectral response filter



Digital LCD Screen
with backlit display and
40-segment bar graph

MAX/MIN Button
to capture
maximum and
minimum values

Backlight Button
for easy
viewing in
low light

Hold button
to hold the current
measurement on
the display

Included Accessories:
Carrying Pouch, 9V Battery



Power On/Off Button

RANGE/FC/LUX Button
easily toggles between
units and ranges

The **ET130** is an easy-to-use precision light meter with single-handed operation to monitor light levels in both Foot Candles (FC) and Lux.

- **Spectral Range:**
400 to 760 nm;
white light CIE standard
- **Range:**
0 to 4,000 FC;
0 to 40,000 Lux
(1 FC \approx 10.76 Lux)
- **Resolution:**
0.01 FC / 0.1 Lux
- **Repeatability:**
 \pm 3%
- **Sample Rate:**
2 times per second
- **Drop Protection:**
3.3 ft. (1 m)



| Cat. No. | UPC# 0-92644+ | Batteries | Height | Width | Depth | Weight (oz.) |
|----------|---------------|-----------|---------------|--------------|--------------|--------------|
| ET130 | 69066-2 | 1 x 9V | 8.1" (206 mm) | 2.1" (54 mm) | 1.4" (36 mm) | 5.5 (156 g) |

See our complete line of Test & Measure products

www.kleintools.com



© 2017 Klein Tools, Inc.
Lincolnshire, IL 60069-1418
96503 Rev. 04/16 A

KLEIN TOOLS
EST. 1857
For Professionals... Since 1857™