
TABLE 1	
MODEL NUMBER	LENGTH
415-0203-006	6.00±.15
415-0203-012	12.00±.25
415-0203-024	24.00±.25
415-0203-036	36.00±.50
415-0203-060	60.00±.50

REV	ECO	DATE
1	INITIAL RELEASE	7/8/2019

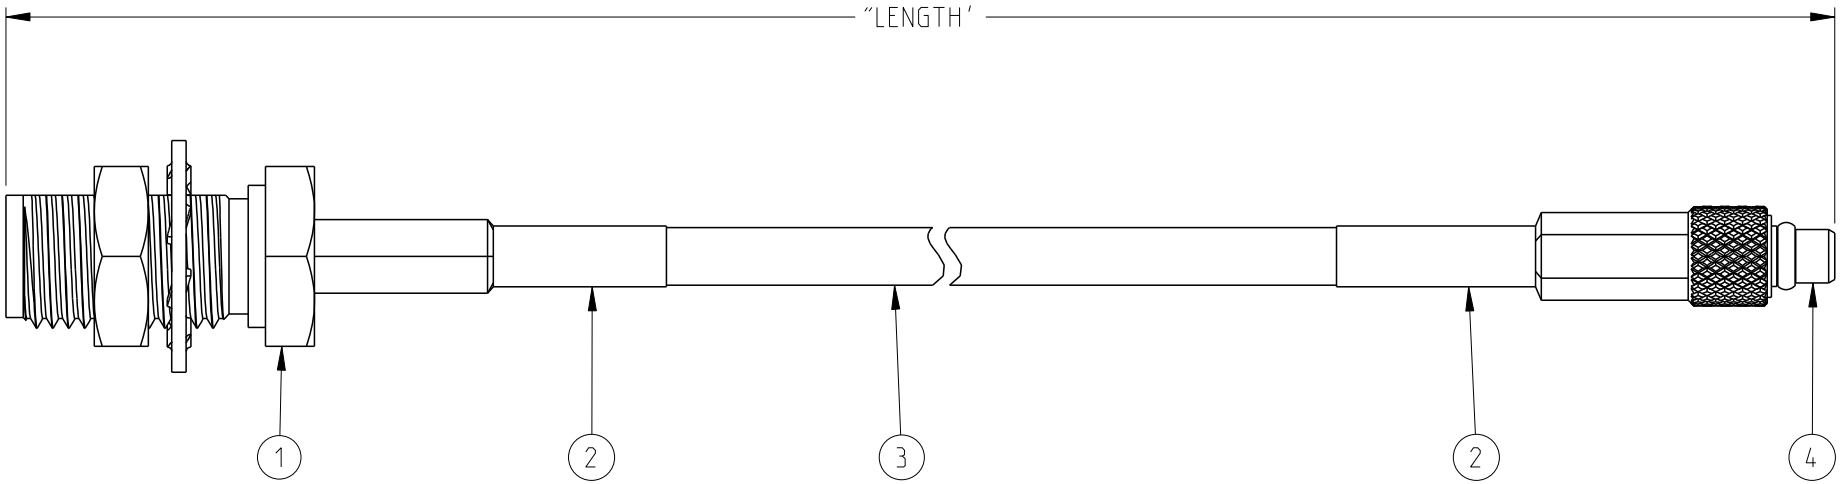

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMA BULKHEAD JACK
2	2X 1.00±0.10	HEAT SHRINK TUBING
3	AR	CABLE
4	1	MMCX PLUG

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.

This PROPRIETARY Document is property of Cinch Connectivity Solutions.It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

Model No: 415-0203-001/999

RoHS2 ☑ 2011/65/EU

Cage Code 34078

3RD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°

Drawn by: TOMMY REN

Date: 7/8/2019

JOHNSON

Title: CABLE ASSY, STR SMA BKHD JACK TO STR MMCX PLUG, RG174

Drawing No. 415-0203-001/999

REV. 1

Size A | DO NOT SCALE DRAWING | Workmanship Std: NONE | Sheet 1 OF 1