

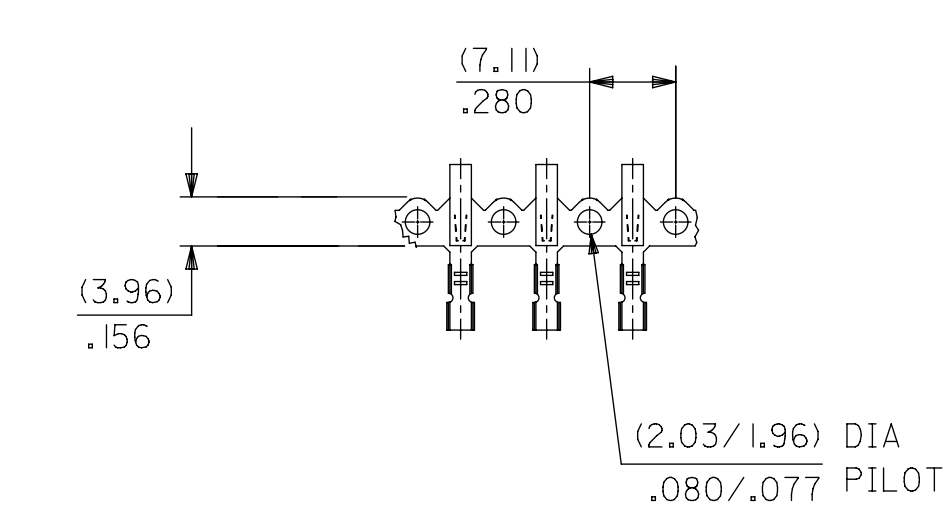
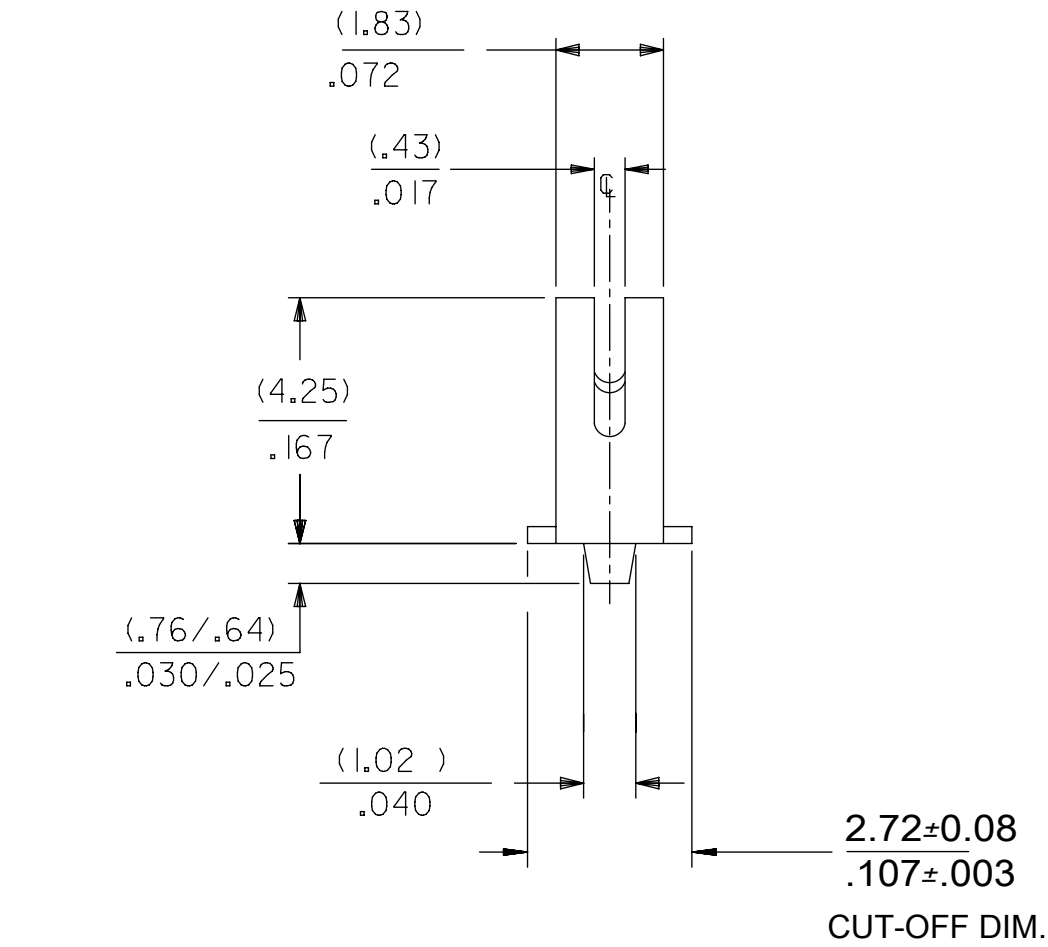
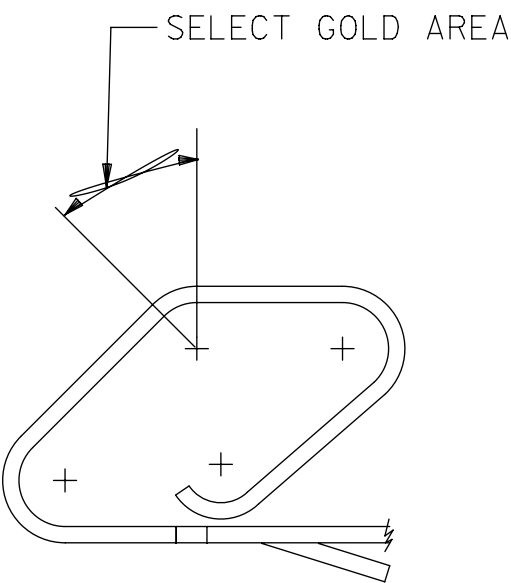


12	11	10
PART NO.	ENG NO.	PLATING
008-56-0113	2477-G	565
008-56-0114	2477-GL	565
008-50-0109	2477-(P909)	P909
008-50-0110	2477-(P909)L	P909

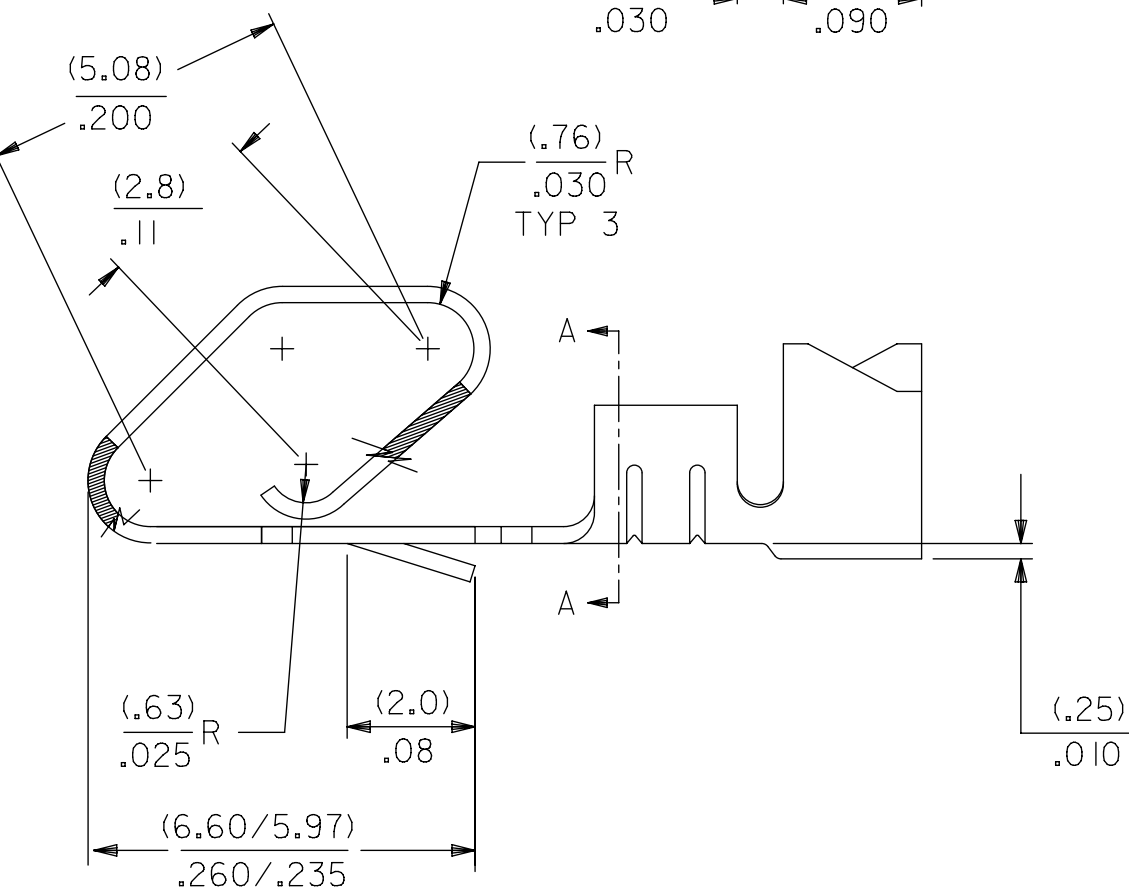

- NOTES:
1. MATERIAL: SEE LEGEND
 2. FINISH: P909: OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
565: SELECT GOLD: (0.00051)/.000020 MIN.
OVERALL NICKEL: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
 3. PRODUCT SPECIFICATION: PS-08-50
 4. PACKAGING SPECIFICATION: LOOSE TERMINALS: PK-2759-001
CHAIN FORM TERMINALS: PER PK-2759-002
 5. CRIMP ACCEPTS 18 TO 24 GA. WIRE WITH (2.79)/.110 MAX. INSULATION DIA.
 6. TERMINAL FOR USE IN 2139 AND 3069 SERIES HOUSINGS WITH (2.54)/.100 MAX. INSULATION DIAMETER AND 172159 SERIES HOUSINGS WITH (2.79)/.110 MAX. INSULATION DIAMETER.
 7. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 8. MATING TERMINALS TO ROUND PINS IS NOT RECOMMENDED.

DOCUMENT STATUS	P1	RELEASE DATE	2018/10/05 09:56:19
-----------------	----	--------------	---------------------

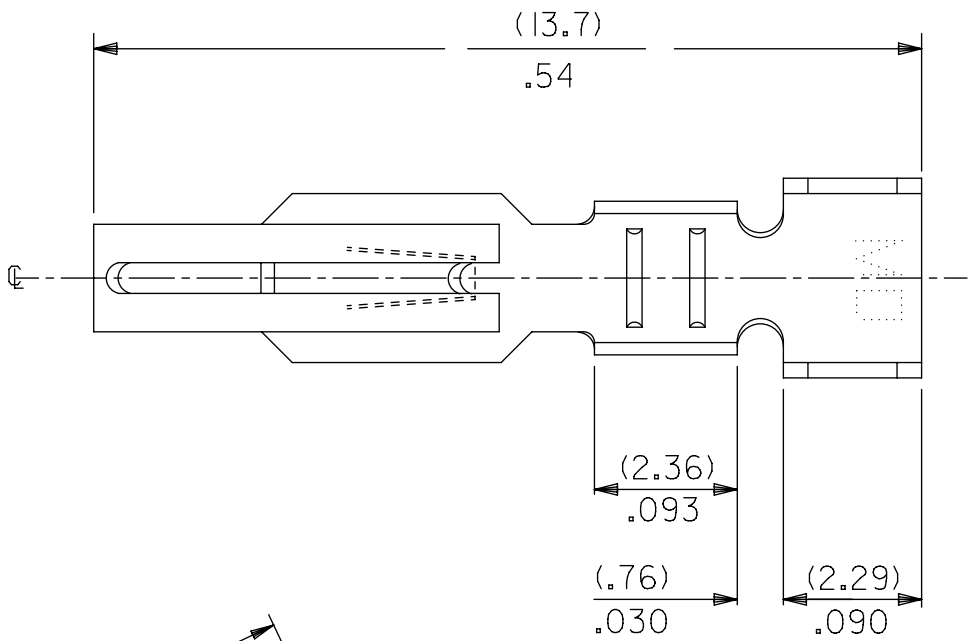

2477- * * - * - *



MATERIAL CODE
(.25)/.010 THK
BLANK= BRASS

WINDING SPEC.
BLANK=CHAIN, PER WINDING DETAIL "B"
L=LOOSE

OPTION CODE
BLANK=AS SHOWN

PLATING
SEE NOTE 2

SECTION A-A

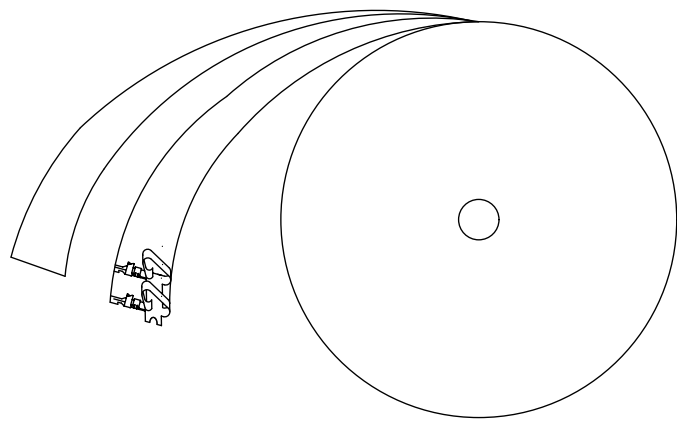

PAPER
INTERLEAF

WINDING DETAIL "B"

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
<										