
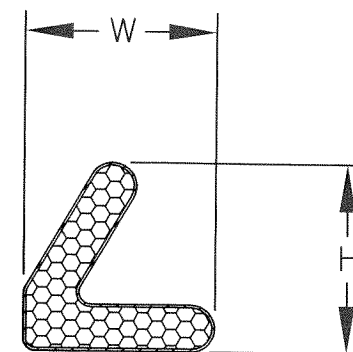


C Fold Shapes		Part Number
H	W	
0.196	0.325	2541-1011-1015
0.250	0.250	2541-1011-0137
0.252	0.280	2541-1011-1016
0.385	0.420	2541-1011-0138
0.395	0.430	2541-1011-0139
0.465	0.420	2541-1011-1017
0.675	0.590	2541-1011-0140

REV	DESCRIPTION	DATE	APPR. BY
-	INITIAL RELEASE	10/27/23	K. COSTA

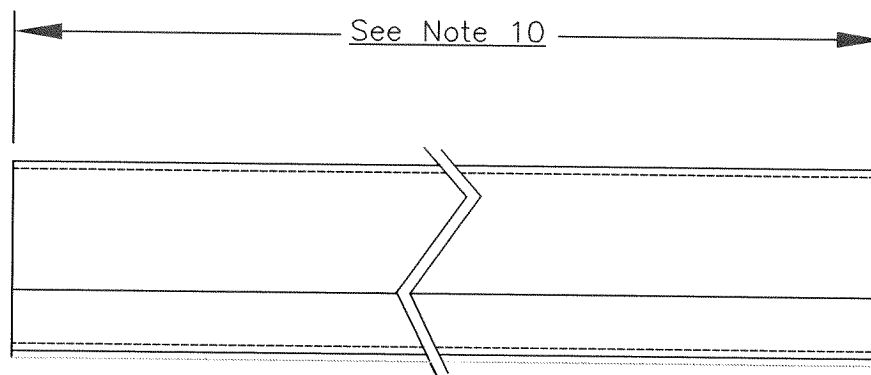

NOTE \triangle 3

MASTER COPY
WHEN INK IS RED

TEPN: 2541

ACCEPTED BY: KC

DATE: 12/1/23

NOTES:

NOTE 1: POLYURETHANE FOAM CORE.

NOTE 2: NICKEL PLATING OVER COPPER SUBSTRATE FABRIC.

NOTE 3: 3M ADHESIVE TRANSFER TAPE 467MP OR EQUIVALENT.

NOTE 4: FLAMMABILITY RATING UL 94 V-0 RATED.

NOTE 5: COMPRESSION PERMANENT DEFORMATION ASTM D395 $\leq 20\%$.

NOTE 6: SURFACE RESISTANCE ASTM F390 ≤ 0.07 OHMS/INCH².

NOTE 7: WORKING TEMPERATURE WITHOUT PSA: -40C - 90C.

NOTE 8: WORKING TEMPERATURE WITH PSA: -40C - 90C.

NOTE 9: UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

NOTE 10: CONSULT MANUFACTURER FOR AVAILABLE LENGTHS.

FOR ITEM:

MAT'L: SEE NOTES

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES TO BE:

$\leq 0.787 \pm 0.011$
 $0.787 - 1.969 \pm 0.019$
 $1.969 - 3.937 \pm 0.027$
 $3.937 - 19.685 \pm 0.038$
 $19.685 - 39.369 \pm 0.118$
 $> 39.369 \pm 0.315$

TECH|ETCH

TECH-ETCH, INC.
45 Aldrin Road
Plymouth MA 02360

FILE: 2541

DATE: 10/27/23

CAT. NO.:

2541-1011-XXXX-XX.XX

PART NAME

Metalized Fabric Gasket

TOOL NO.:

N/A

DRAWN BY:

K. Costa

APPR. BY:

K. Costa

SHEET:
1 OF 1

SIZE:

SCALE:
1:1