

DESCRIPTION: SCSI 2 & 3 DIE CAST WITH THUMBSCREWS

No. OF PINS	DIMENSIONS				
	A	B	C	D	E
50	1.252 [31.80]	2.98 [53.30]	0.461 [11.70]	0.535 [13.60]	1.520 [38.60]
68	1.673 [42.50]	2.516 [63.90]	0.465 [11.80]	0.543 [13.80]	1.508 [38.30]
	ALL TOLERANCES = 0.012 [0.30]				



MATERIAL:

BACK SHELL: ZINC PLATED NICKEL OVER COPPER
JACKSCREWS: STEEL, NICKEL PLATED OVER COPPER
SCREWS: STEEL, NICKEL PLATED OVER COPPER
CLAMP: STEEL, NICKEL PLATED

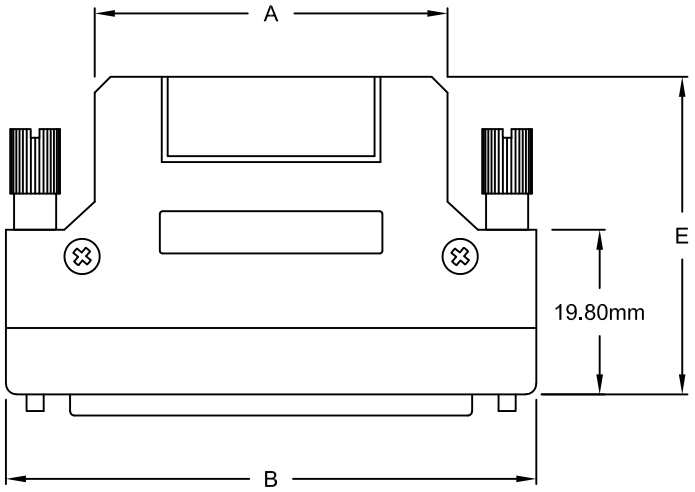


KIT INCLUDES:


(1) MALE CONNECTOR - SOLDER CUP
(2) METAL SHELL HALVES
(2) THUMBSCREWS (2-56 THREADS)
(1) STRAIN RELIEF CLAMP
(2) STRAIN RELIEF SCREWS
(2) HOUSING SCREWS


BACK SHELL KIT PART NUMBER 989-YYY-130L121

SERIES
POSITIONS
050
068
CONTACTS
SOLDER
MATERIAL
30 = DIE CAST (NICKEL)
RoHS COMPLIANT
L = LOW TEMP. PROCESS
COLOR
12 = METAL(IZED)
PUT-UP
1 = KIT



STRAIN RELIEF CLAMP





RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: N. KOVALSKY
DATE: 04/18/2008

NorComp

SCALE: NTS
SHEET 1 OF 3
REV 3
DWG NO. 989-YYY-130L121

DESCRIPTION: CONNECTOR FOR 988 SERIES BACK SHELL KIT


No. OF PINS	DIMENSIONS A	B	C
50	1.545 [39.30]	1.372 [34.85]	0.366 [9.30]
68	1.996 [50.70]	1.825 [46.35]	0.366 [9.30]


MATERIAL:

HOUSING: THREMOPLASTIC, BLACK, P.B.T. UL94V-0
CONTACTS: PHOSPHOR BRONZE, 5u" GOLD MATING AREA 100u" MIN TIN SOLDER AREA
FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER

ELECTRICAL:

CURRENT RATING: 0.5 AMPS
INSULATOR RESISTANCE: 500 MOHMS Min.
DIELECTRIC WITHSTANDING: 500VAC
CONTACT RESISTANCE: 35 mOhms Max.
OPERATING TEMPERATURE: -55° ~ +85° C

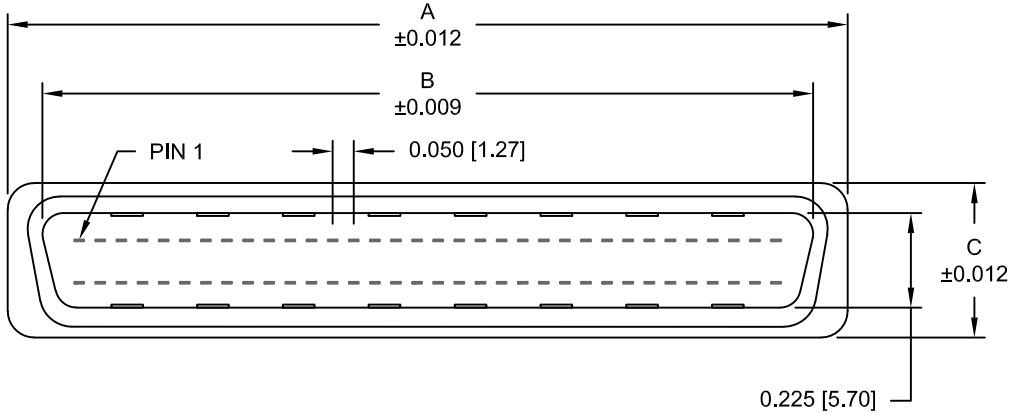

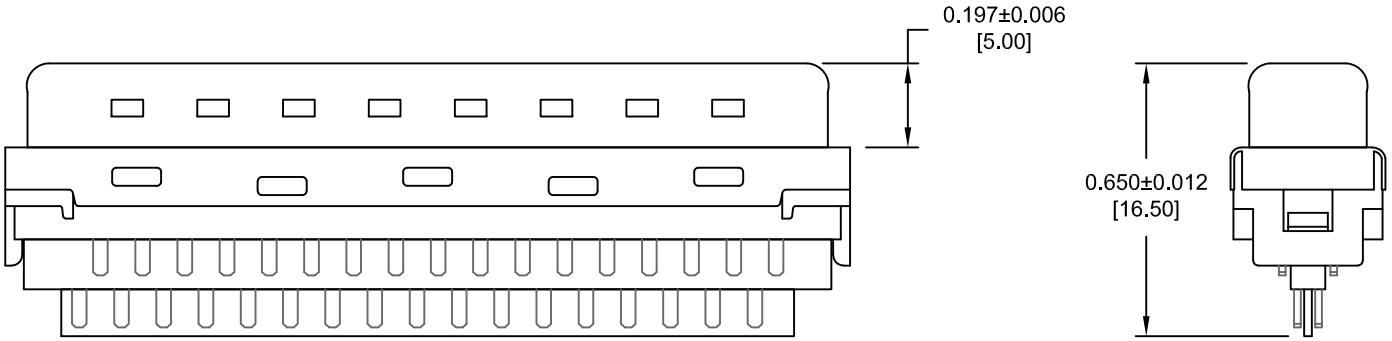

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


DRAWN: N. KOVALSKY
DATE: 04/18/2008


NorComp


SCALE: NTS
SHEET 2 OF 3
REV 3
DWG NO. 989-YYY-130L121

DESCRIPTION: PIN CONFIGURATION FOR 988 SERIES BACK SHELL KIT


50 POSITION

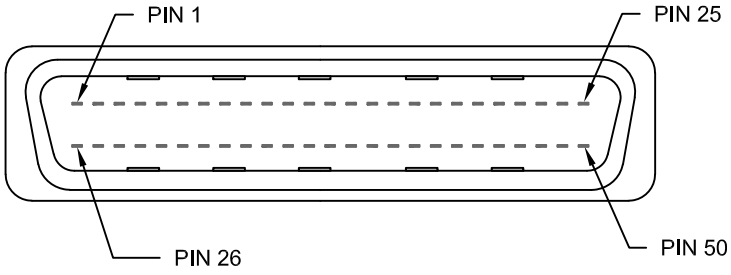


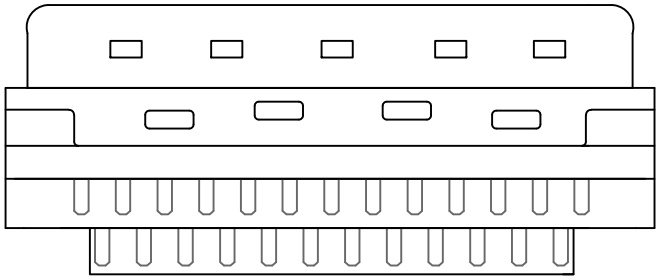


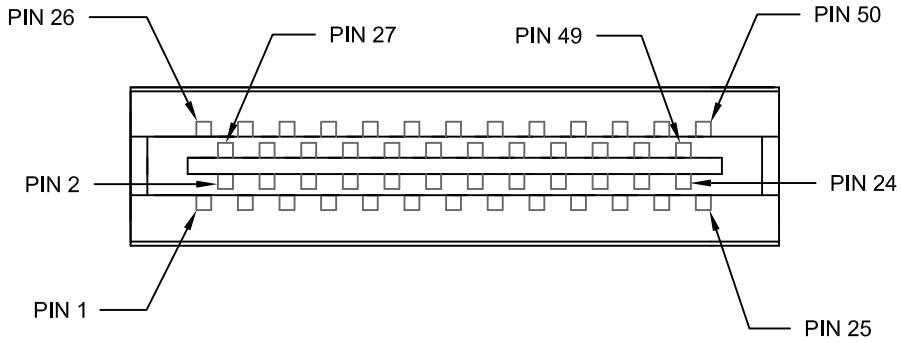

68 POSITION

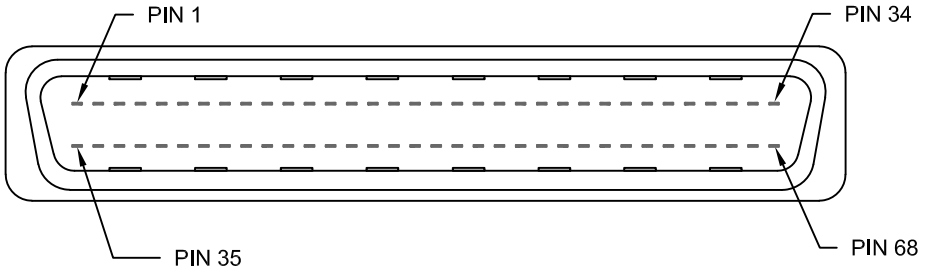

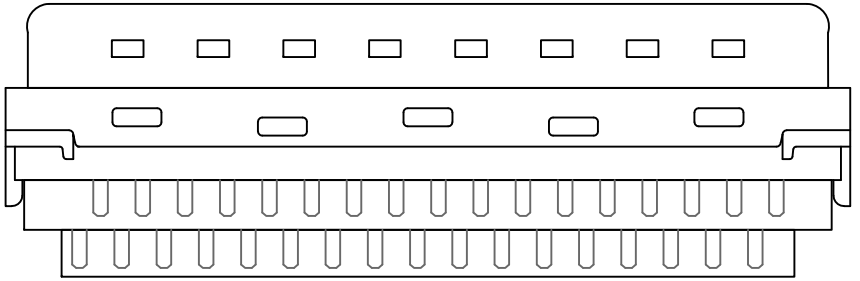

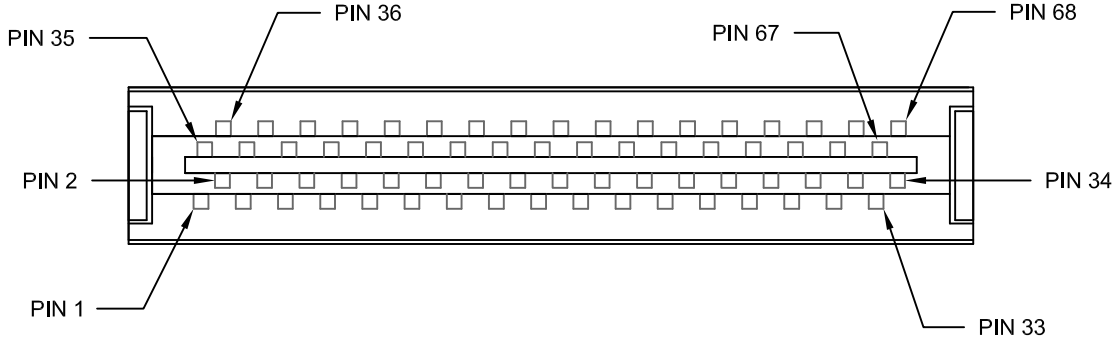

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:
N. KOVALSKY	04/18/2008

NorComp

SCALE:	SHEET	OF	REV
NTS	3	3	3

DWG NO. 989-YYY-130L121