
This document was generated on 11/30/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0014562051
Status: Active
Overview: SL Modular Connectors
Description: 2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version A, Non-polarized, Wire Size 24 AWG, 0.38µm Gold (Au), 5 Circuits

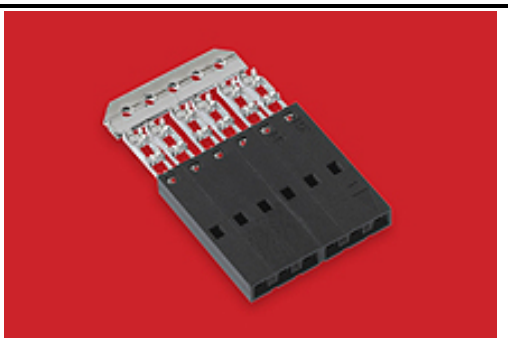

Series image - Reference only

Documents:

3D Model
3D Model (PDF)
Drawing (PDF)
Packaging Specification PK-70873-0001-001 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Ribbon Cable / Wire Trap Connectors
Series	70400
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Capable	No
Overview	SL Modular Connectors
Product Name	SL
UPC	800754215794
Physical	
Circuits (Loaded)	5
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Net Weight	1.809/g
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm max.
Wire Size AWG	24
Wire/Cable Type	Discrete Wire, Ribbon Cable
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Material Info	
Engineering Number	704000529

EU ELV
Not Relevant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free Status
Not Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
70400 Series

Mates With
Single Row Headers and Housings, 8624 , 70203 , 42375 , 42377

Use With
7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG

Application Tooling | **FAQ**

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
IDT Discrete Handtool Module	621000700

Reference - Drawing Numbers

Packaging Specification	PK-70873-0001-001
Sales Drawing	SD-70400-010-001, SDA-70400-0526-0549-001

Ribbon Cable Tool Kit, Press Not Included	622016600
Hawk Semi-Automatic Discrete Wire Terminator	623003100

This document was generated on 11/30/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION