


Cat6 Gigabit Molded (UTP) Ethernet Cable (RJ45 M/M), Orange, 20 ft. (6.09 m)

MODEL NUMBER: N200-020-OR

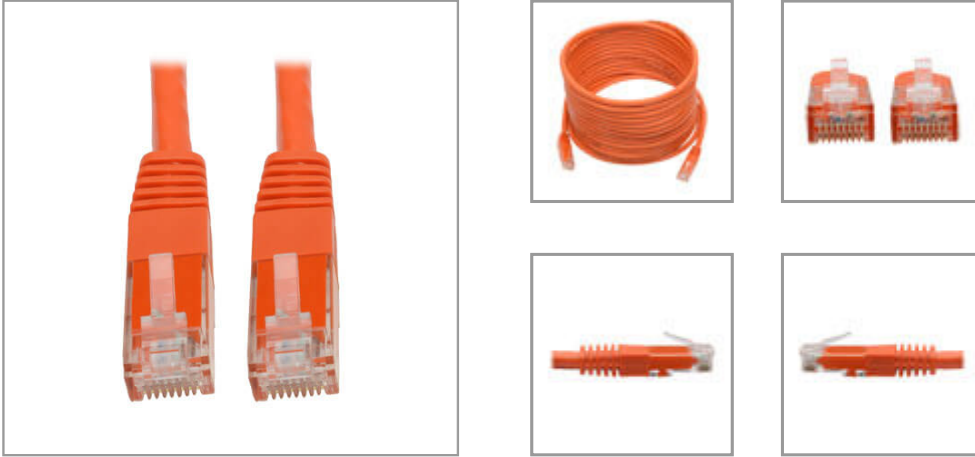

Ideal for connecting high-speed network components, such as computers, printers, video game systems, Blu-ray™ players, copy machines, routers and modems, in a home or office Cat5/5e/6 application.

Description

The N200-020-OR Cat6 Gigabit Molded Patch Cable ensures ultra-fast performance throughout your Cat5/5e/6 network application. It connects high-speed network components like computers, printers, video game systems, Blu-ray players, copy machines, routers and modems in a home or office Cat5/5e/6 application.

This 20-ft. (6.09 m) orange cable is designed for 1000Base-T (1 Gbps Ethernet), 10/100Base-T (Ethernet), 100 Mbps TPDDI, 155 Mbps ATM, ISDN, voice, Token Ring Type 3 and EIA/TIA applications. Manufactured from 24 AWG 4-pair stranded UTP with a PVC jacket, staggered-pin plug design and male RJ45 connectors, each cable provides high-speed connections up to 550 MHz/1 Gbps and flawless signal delivery, while keeping near-end crosstalk levels to a minimum.

The N200-020-OR is constructed of top-quality materials for long life and durability. Corrosion-resistant gold-plated copper contacts provide maximum conductivity and minimize data loss. Integral strain relief gives the cable extra flexibility, reduces stress, and helps the cable and connectors move freely without cracking. Meets most current industry standards, including IEEE 802.3ab, IEEE 802.5, ANSI/EIA/TIA 568, ISO/IEC 11801 and ETL (category 6 draft 11).

Features

The Ideal Solution for All High-Speed Cat5/5e/6 Networking

- Connects high-speed network components, such as computers, printers, video game systems, Blu-ray players, copy machines, routers and modems
- Designed for 1000Base-T, 10/100Base-T (Ethernet), 100 Mbps TPDDI, 155 Mbps ATM, ISDN, voice, Token Ring Type 3 and EIA/TIA applications
- Recommended for home or office applications
- Provides high-speed connections up to 550 MHz/1 Gbps
- Flawless signal delivery with minimal near-end crosstalk levels

Premium Construction Ensures Error-Free Signal Transfer

- Manufactured from 24 AWG 4-pair stranded UTP with staggered-pin plug design
- Molded RJ45 connectors and gold-plated copper contacts for maximum conductivity and minimum data loss

Highlights

- Premium cabling for Cat5/5e/6 home/office network applications
- Rated for 550 MHz/1 Gbps communication
- 24 AWG 4-pair stranded UTP with PVC jacket
- Gold-plated copper contacts minimize data loss
- Integral strain relief protects connectors from stress and cracking

Package Includes

- N200-020-OR Cat6 Gigabit Molded Patch Cable, Orange, 20-ft. (6.09 m)



- Integral strain relief protects cable and connectors from stress and cracking
- Meets most current industry standards, including IEEE 802.3ab, IEEE 802.5, ANSI/EIA/TIA 568, ISO/IEC 11801 and ETL (category 6 draft 11)

Specifications

| OVERVIEW | |
|------------------------------------|--|
| UPC Code | 037332204639 |
| Technology | Cat6 |
| PRODUCT OVERVIEW | |
| Product Overview | Cat6 Gigabit Orange Patch Cable RJ45 - 20' |
| POWER | |
| Power Over Cable (PoC) Support | No |
| PHYSICAL | |
| Cable Jacket Color | Orange |
| Cable Jacket Material | PVC |
| Cable Jacket Rating | CM |
| Cable Shielding | UTP |
| Cable Outer Diameter (OD) | 6.0mm |
| Number of Conductors | 4 Pair |
| Conductor Material | Stranded Copper |
| Conductor Gauge | 24 AWG |
| Wire Gauge (OD - mm ²) | 24 |
| Cable Length (ft.) | 20 |
| Cable Length (m) | 6.10 |
| Cable Length (in.) | 240 |
| Cable Length (cm) | 609.6 |
| Shipping Dimensions (hwd / cm) | 25.40 x 20.32 x 1.27 |
| Shipping Dimensions (hwd / in.) | 10.00 x 8.00 x 0.50 |
| Shipping Weight (kg) | 0.29 |
| Shipping Weight (lbs.) | 0.65 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 14 to 104 F (-10 to 40 C) |



| | |
|--------------------------------------|-------------------------------------|
| Storage Temperature Range | 5 to 122 F (-15 to 50 C) |
| Operating Humidity Range | 0% to 90% RH, Non-Condensing |
| Storage Humidity Range | 0% to 90% RH, Non-Condensing |
| COMMUNICATIONS | |
| Bandwidth per TIA Standard | 250 MHz |
| Maximum Bandwidth as Tested | 500 MHz |
| Network Compatibility | 1 Gbps (Gigabit) |
| IEEE Standards Supported | 802.3an |
| CONNECTIONS | |
| Side A - Connector 1 | RJ45 (MALE) |
| Side B - Connector 1 | RJ45 (MALE) |
| Crossover Wiring | No |
| Contact Plating | Gold |
| Connector Type | Molded |
| Wiring Configuration | EIA/TIA 568B |
| FEATURES & SPECIFICATIONS | |
| IP68 Rated | No |
| Snagless Connector | No |
| Antibacterial | No |
| IP20 Rated | No |
| STANDARDS & COMPLIANCE | |
| Certification & Compliance | RoHS; REACH; IEEE 802.3an 10GBASE-T |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>