


C2268FNL

TRANSFORMER
SURFACE MOUNT

NOTES: UNLESS OTHERWISE SPECIFIED


1. OPERATING TEMPERATURE: 0°C TO +70°C
2. STORAGE TEMPERATURE: -20°C TO +125°C
3. JEDEC MOISTURE: LEVEL 1.
4. DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCE:
.XX= ±.01
.XXX= ±.005
5. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER. ie: C2268FNLT
6. ROHS COMPLIANT



ELECTRICAL SPECIFICATIONS: @ 25°C

PARAMETER	SPECIFICATIONS
URNS RATIO	1:1 ± 5%
POLARITY	PER SCHEMATIC
PRIMARY INDUCTANCE	7.5 uH MIN @100KHZ, .20 VRMS
LEAKAGE INDUCTANCE	.10 uH MAX @100KHZ, 20 mVRMS
C _{ww}	5 PF MAX @100KHZ, 20 mVRMS
DC RESISTANCE	.20 OHMS MAX
HIPOT	1500 VRMS MIN @ 60 SECONDS

MECHANICAL SPECIFICATIONS:

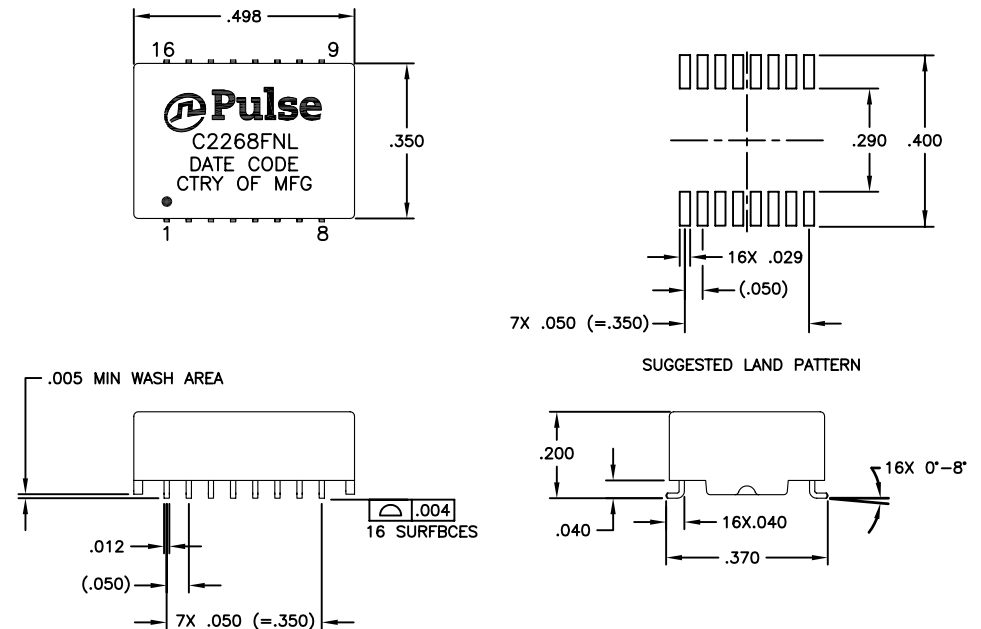

© Copyright, 2013. Pulse Engineering, Inc. All rights reserved. Drawing specifications subject to change without notice. Date (08/15/13)

PULSE CONFIDENTIAL
&
PROPRIETARY

PRODUCT SPECIFICATION:
XFMR,FC,DUAL,1:1,75UH,OH,SM

DWG. NO./ PART NO.	SHEET:	REV.
C2268FNL	1	MP1