

EMILY-RS

~8° spot beam. 14.74 mm high lens.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 26.0 mm
Height	14.7 mm
Fastening	tape
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
EMILY-RS	Single lens	PMMA	clear	
SPUTNIK-TAPE	Tape	Acrylic foam	black	



ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CA13546_EMILY-RS » Box size: 480 x 280 x 300 mm	Single lens	1690	260	130	10.3

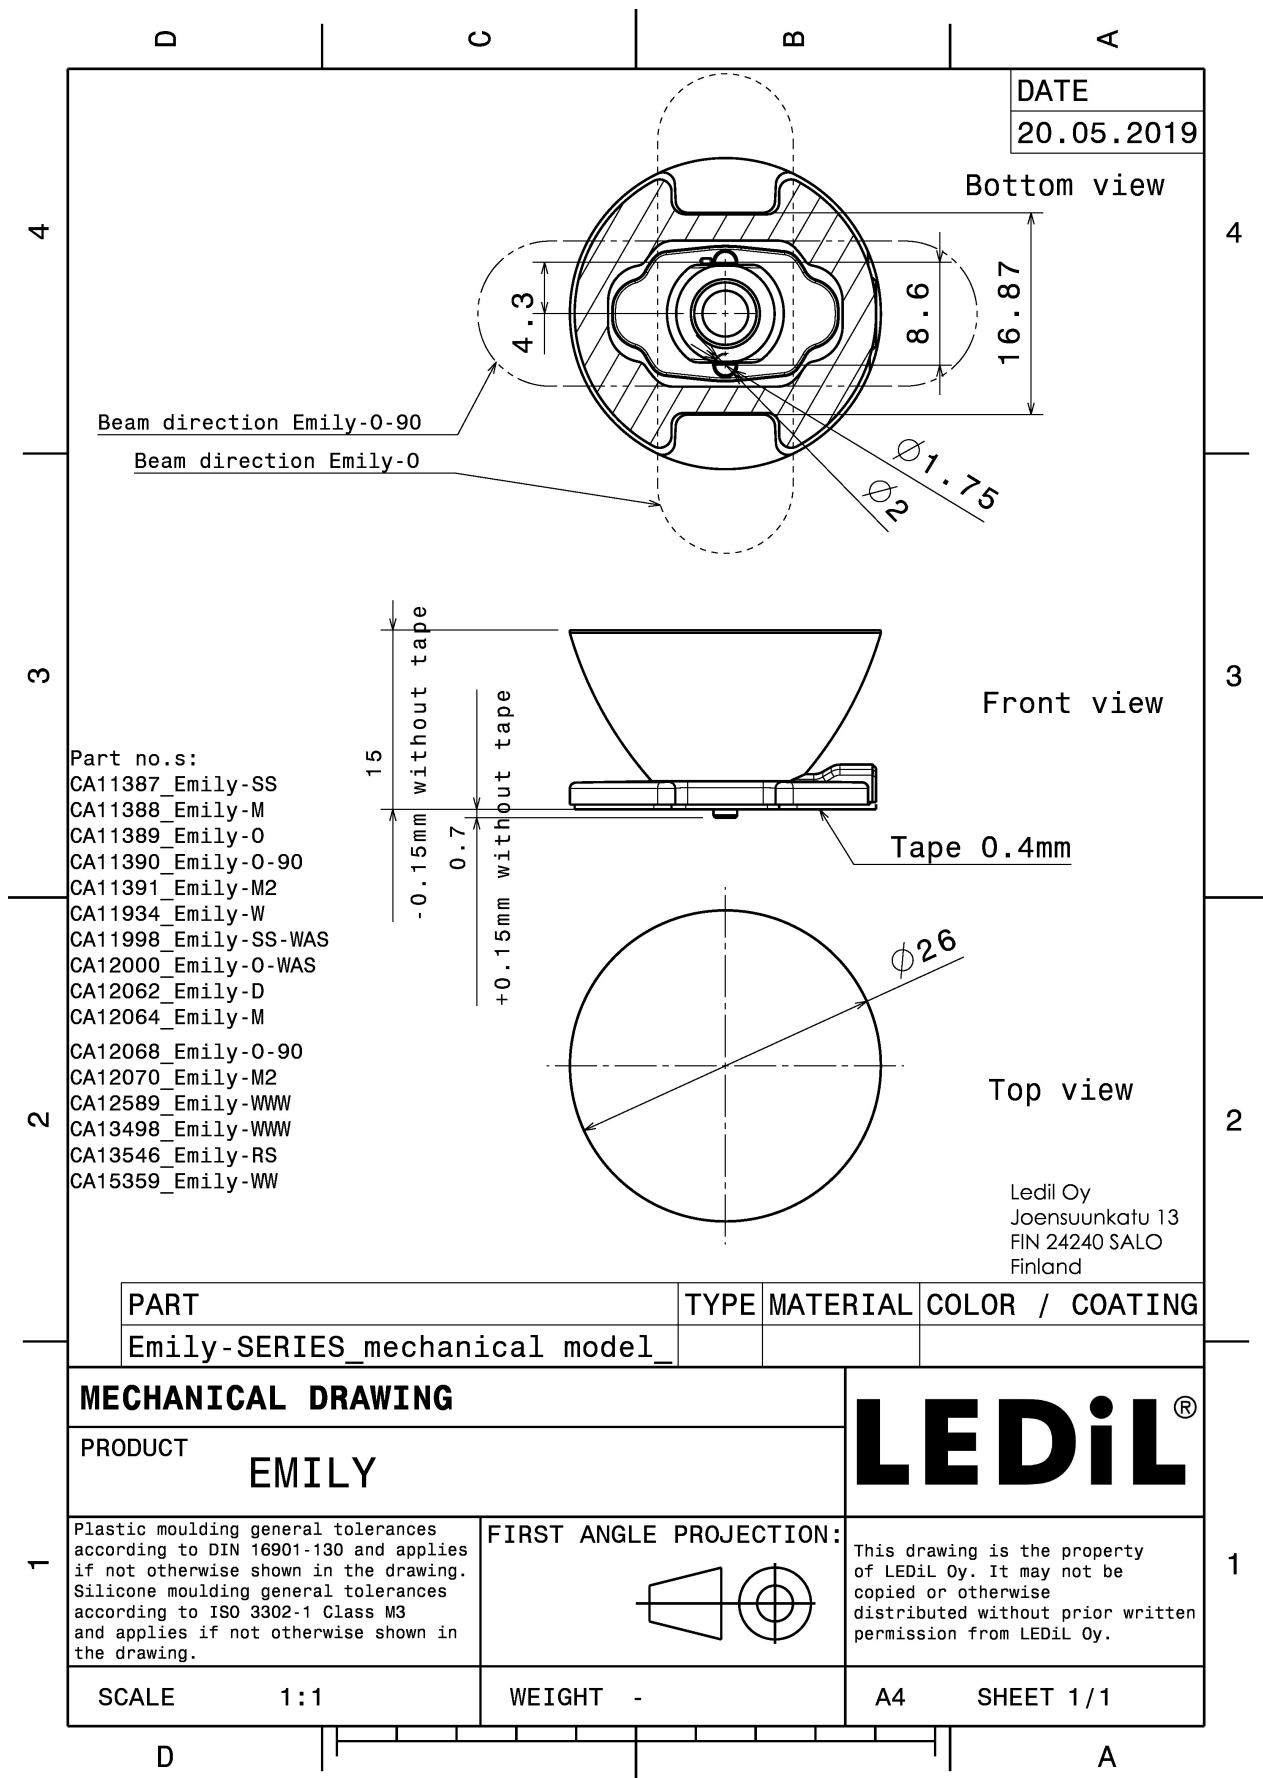


See also our general installation guide: www.ledil.com/installation_guide

PHOTOMETRIC DATA (MEASURED):


CREE → LED

LED XB-H
 FWHM / FWTM 9.0° / 17.0°
 Efficiency 88 %
 Peak intensity 24.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

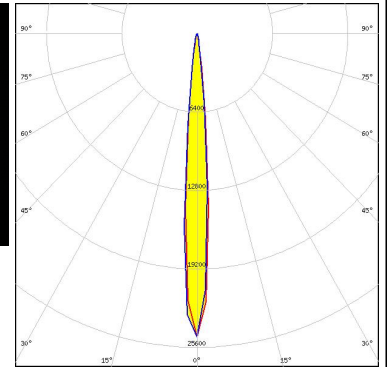


CREE → LED

LED XP-G3
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 94 %
 Peak intensity 18 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

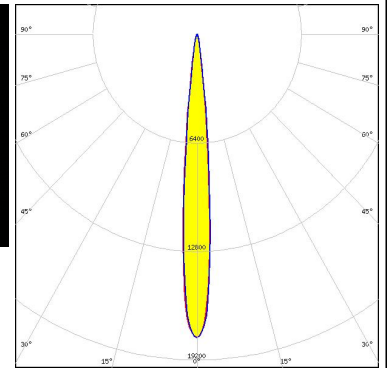


CREE → LED

LED XP-L HD
 FWHM / FWTM 13.0° / 23.0°
 Efficiency 89 %
 Peak intensity 13.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

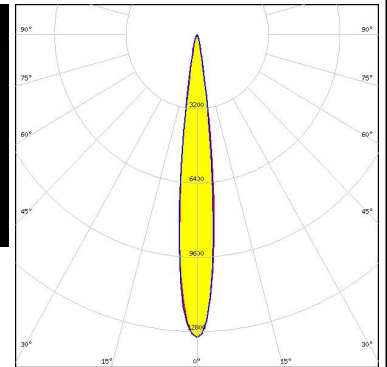
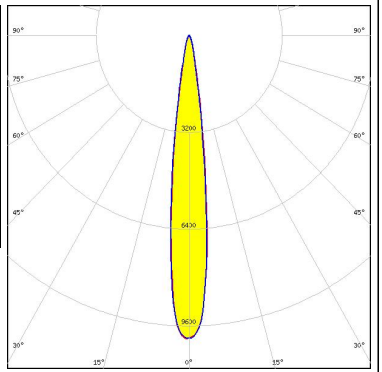

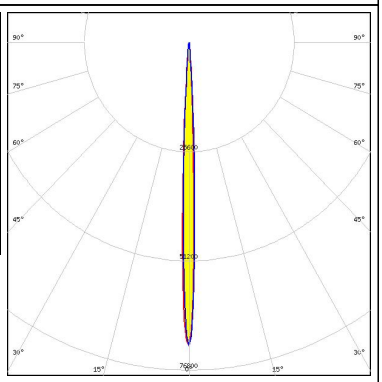

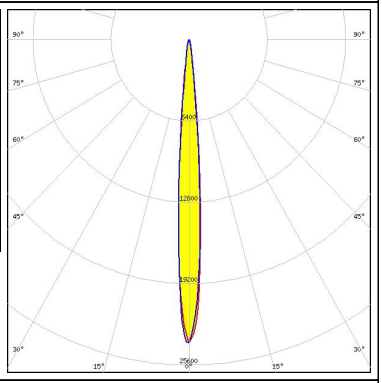

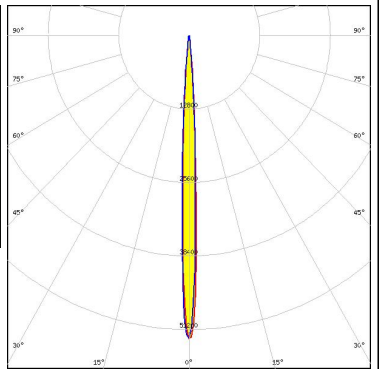


CREE → LED


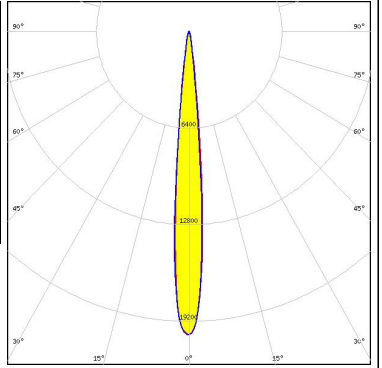

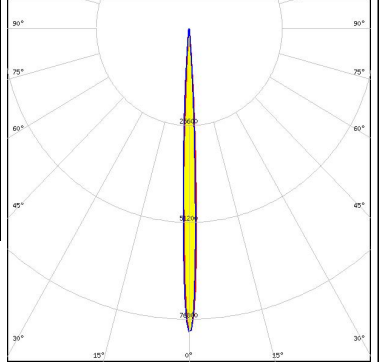
LED XP-L HI
 FWHM / FWTM 8.0° / 15.0°
 Efficiency 88 %
 Peak intensity 28 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

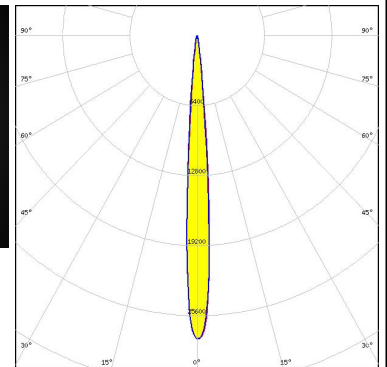

PHOTOMETRIC DATA (MEASURED):

<p>CREE LED</p> <p>LED: XP-L2 FWHM / FWTM: 13.0° / 25.0° Efficiency: 93 % Peak intensity: 10 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>CREE LED</p> <p>LED: XQ-E HI FWHM / FWTM: 4.0° / 9.0° Efficiency: 94 % Peak intensity: 71.1 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>CREE LED</p> <p>LED: XT-E FWHM / FWTM: 8.0° / 16.0° Efficiency: 91 % Peak intensity: 23.9 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>LUMILEDS</p> <p>LED: LUXEON Z ES FWHM / FWTM: 5.0° / 11.0° Efficiency: 91 % Peak intensity: 52 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):

<p>NICHIA</p> <p>LED NVSW219D FWHM / FWTM 10.0° / 18.0° Efficiency 94 % Peak intensity 20.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED OSLON Square EC FWHM / FWTM 8.0° / 15.0° Efficiency 90 % Peak intensity 29.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED PLPVEC2 850A FWHM / FWTM 4.0° / 11.0° Efficiency % LEDs/each optic 1 Light colour IR Required components:</p>		
<p>SEOUL SEMICONDUCTOR</p> <p>LED nPola FWHM / FWTM 5.0° Efficiency 94 % Peak intensity 81.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		


PHOTOMETRIC DATA (MEASURED):



PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED XHP35 HI
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 96 %
 Peak intensity 22 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

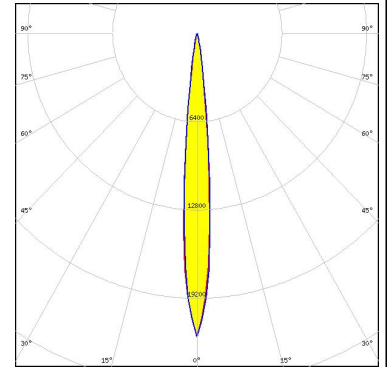


CREE LED

LED XP-E2
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 94 %
 Peak intensity 51.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

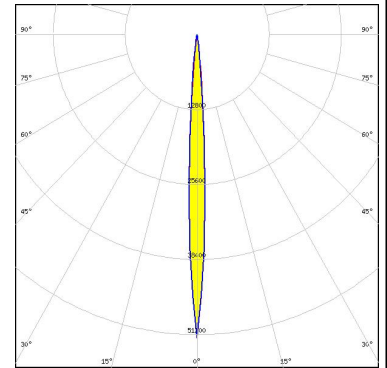


CREE LED

LED XP-G2
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 94 %
 Peak intensity 30.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

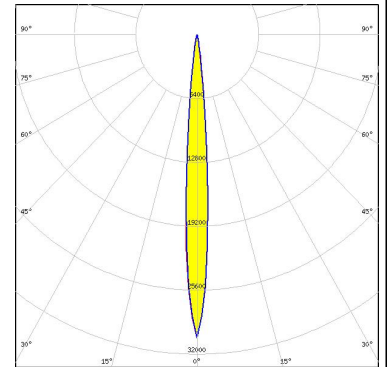

CREE LED

LED XP-G2 HE
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 95 %
 Peak intensity 19.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

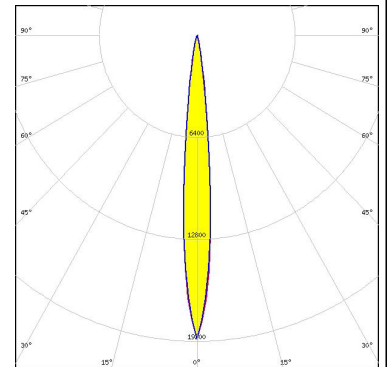

PHOTOMETRIC DATA (SIMULATED):

<p>CREE LED</p> <p>LED: XP-P FWHM / FWTM: 6.0° / 12.0° Efficiency: 96 % Peak intensity: 63.8 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON C FWHM / FWTM: 7.0° / 16.0° Efficiency: 94 % Peak intensity: 37.3 cd/lm LEDs/each optic: 1 Light colour: Royal Blue Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON MZ FWHM / FWTM: 14.0° / 26.0° Efficiency: 95 % Peak intensity: 10.7 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON Rebel FWHM / FWTM: 6.0° / 14.0° Efficiency: 94 % Peak intensity: 41.5 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	


PHOTOMETRIC DATA (SIMULATED):

<p>LUMILEDS</p> <p>LED LUXEON Rebel Plus</p> <p>FWHM / FWTM 6.0° / 14.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 42.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON Rubix</p> <p>FWHM / FWTM 6.0° / 12.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 67.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Red</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON Rubix</p> <p>FWHM / FWTM 6.0° / 12.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 64.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Green</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON Rubix</p> <p>FWHM / FWTM 6.0° / 12.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 63.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Blue</p> <p>Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED LUXEON Rubix
 FWHM / FWTM 6.0° / 12.0°
 Efficiency 96 %
 Peak intensity 62.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

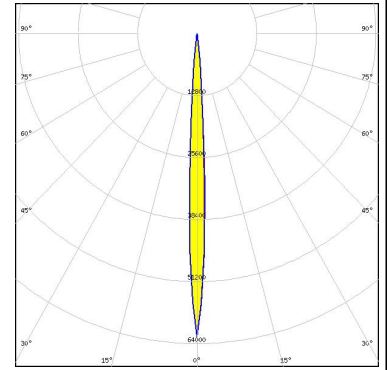


LUMILEDS

LED LUXEON Z
 FWHM / FWTM 5.9° / 12.0°
 Efficiency 94 %
 Peak intensity 65.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

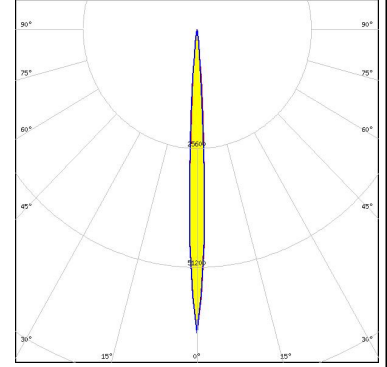


NICHIA

LED NCSxE17A
 FWHM / FWTM 6.0° / 16.0°
 Efficiency 93 %
 Peak intensity 35.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:




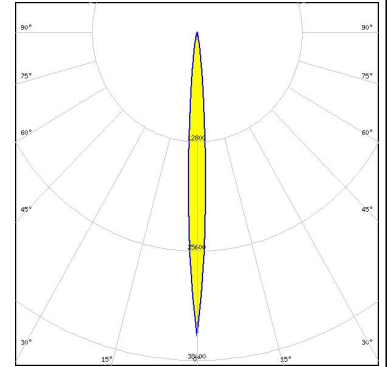


NICHIA

LED NCSxE17A
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 92 %
 Peak intensity 32.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

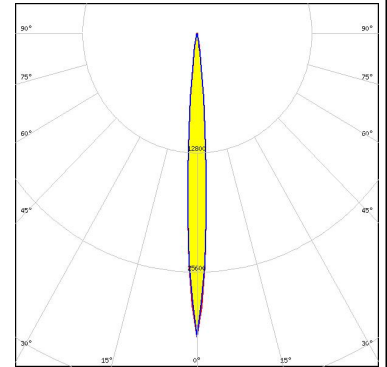


PHOTOMETRIC DATA (SIMULATED):
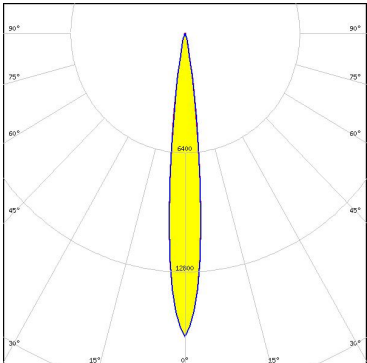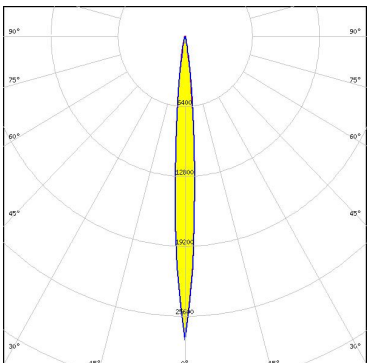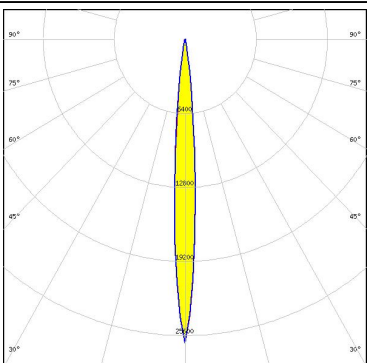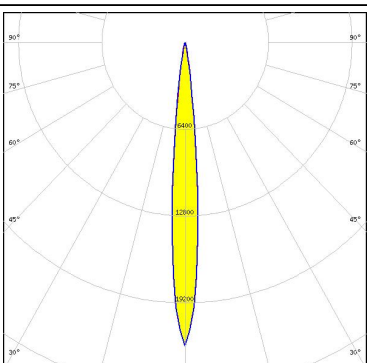
<p>NICHIA</p> <p>LED NVSW3x9A FWHM / FWTM 12.0° / 22.0° Efficiency 95 % Peak intensity 16.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NVSxE21A FWHM / FWTM 8.0° / 18.0° Efficiency 94 % Peak intensity 27.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NVSxE21A FWHM / FWTM 8.0° / 18.0° Efficiency 93 % Peak intensity 26.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NVSxx19B/NVSxx19C FWHM / FWTM 10.0° / 18.0° Efficiency 95 % Peak intensity 22.4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):


OSRAM Opto Semiconductors

LED Duris S5 (Single chip)
 FWHM / FWTM 9.0° / 18.0°
 Efficiency 89 %
 Peak intensity 23.2 cd/lm
 LEDs/each optic 1
 Light colour Purple
 Required components:

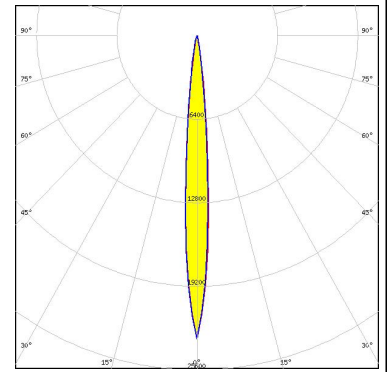


OSRAM Opto Semiconductors

LED Duris S5 (Single chip)
 FWHM / FWTM 8.0° / 18.0°
 Efficiency 96 %
 Peak intensity 25.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

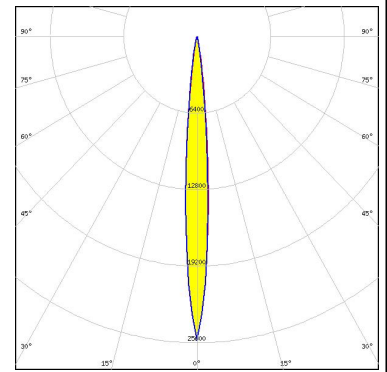


OSRAM Opto Semiconductors

LED OSCONIQ C 2424
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 96 %
 Peak intensity 36.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

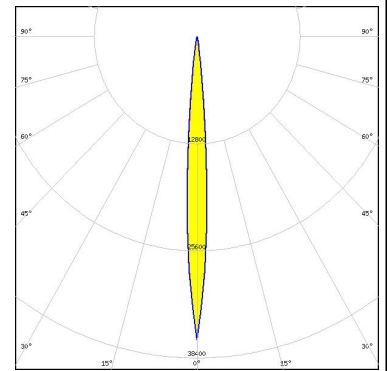

OSRAM Opto Semiconductors

LED OSCONIQ P 3030
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 96 %
 Peak intensity 20.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

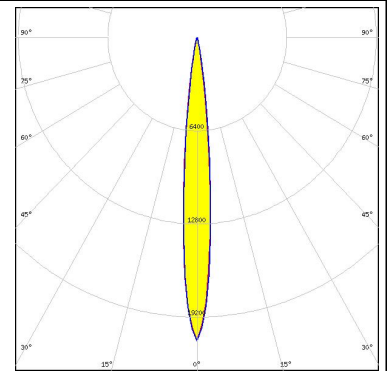

PHOTOMETRIC DATA (SIMULATED):


<p>OSRAM Opto Semiconductors</p> <p>LED: OSLOn Black</p> <p>FWHM / FWTM: 11.0° / 20.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 19.7 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: OSLOn Black Flat</p> <p>FWHM / FWTM: 6.3° / 14.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 50.4 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: OSLOn PURE 1010</p> <p>FWHM / FWTM: 8.0° / 16.0°</p> <p>Efficiency: 93 %</p> <p>Peak intensity: 29.8 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: OSLOn Square CSSRM2/CSSRM3</p> <p>FWHM / FWTM: 11.0° / 21.0°</p> <p>Efficiency: 94 %</p> <p>Peak intensity: 19.4 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLOM SSL 120
 FWHM / FWTM 7.0° / 14.0°
 Efficiency 96 %
 Peak intensity 45.5 cd/lm
 LEDs/each optic 1
 Light colour Amber
 Required components:

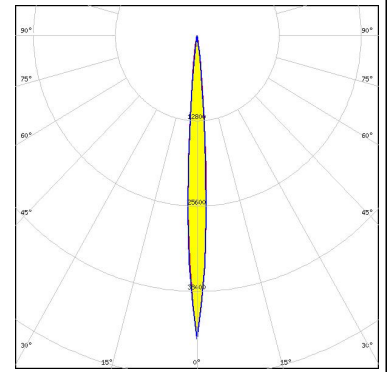

OSRAM

Opto Semiconductors


LED OSLOM SSL 150
 FWHM / FWTM 7.0° / 14.0°
 Efficiency 96 %
 Peak intensity 44.5 cd/lm
 LEDs/each optic 1
 Light colour Amber
 Required components:

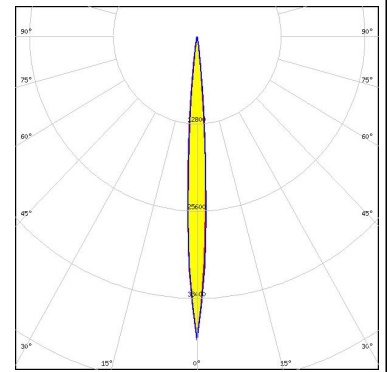

OSRAM

Opto Semiconductors


LED OSLOM SSL 150
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 96 %
 Peak intensity 47.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

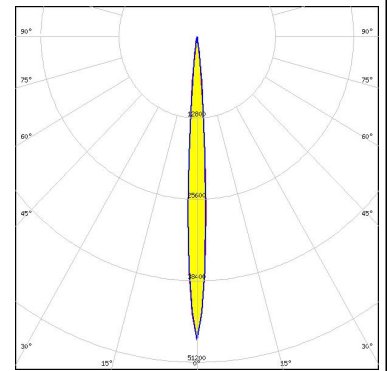

OSRAM

Opto Semiconductors


LED OSLOM SSL 80
 FWHM / FWTM 7.0° / 14.0°
 Efficiency 94 %
 Peak intensity 38 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

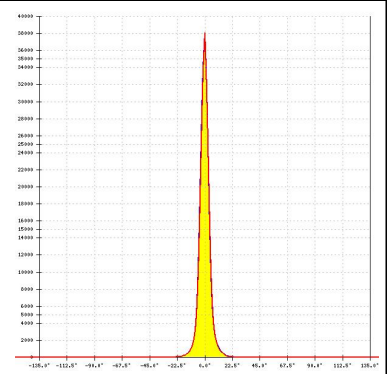

PHOTOMETRIC DATA (SIMULATED):

OSRAM Opto Semiconductors

LED SFH 4170S
 FWHM / FWTM 6.0° / 11.0°
 Efficiency 87 %
 LEDs/each optic 1
 Light colour IR
 Required components:

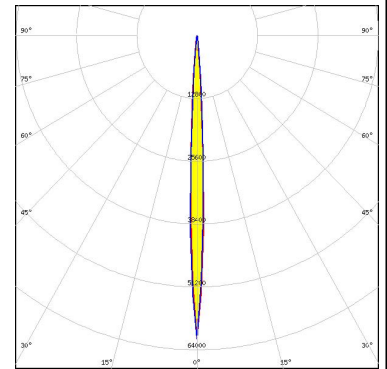


OSRAM Opto Semiconductors

LED SFH 4716AS
 FWHM / FWTM 8.0° / 14.0°
 Efficiency 96 %
 LEDs/each optic 1
 Light colour IR
 Required components:


OSRAM Opto Semiconductors

LED SFH 4725AS
 FWHM / FWTM 8.0° / 18.0°
 Efficiency 95 %
 LEDs/each optic 1
 Light colour IR
 Required components:

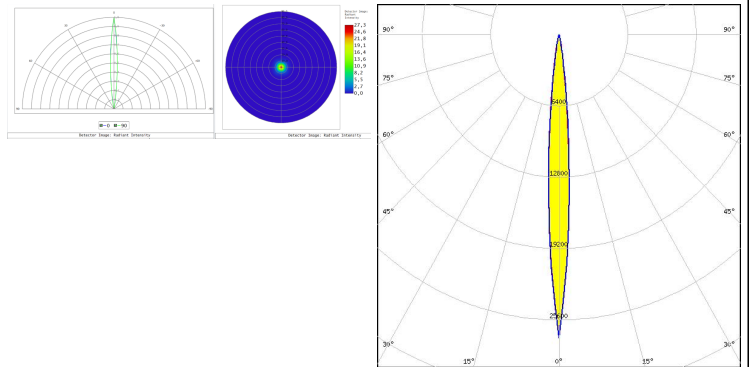

SAMSUNG

LED LM301B
 FWHM / FWTM 9.0° / 18.0°
 Efficiency 94 %
 Peak intensity 28.5 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

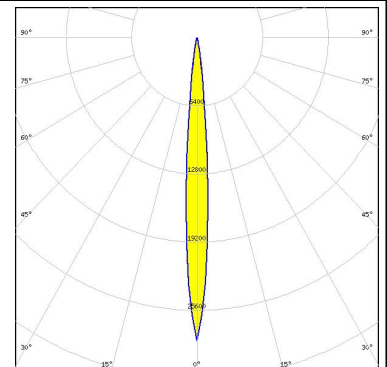

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)