
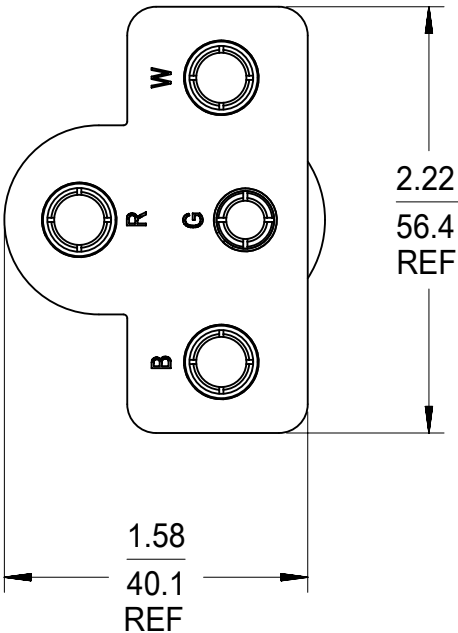
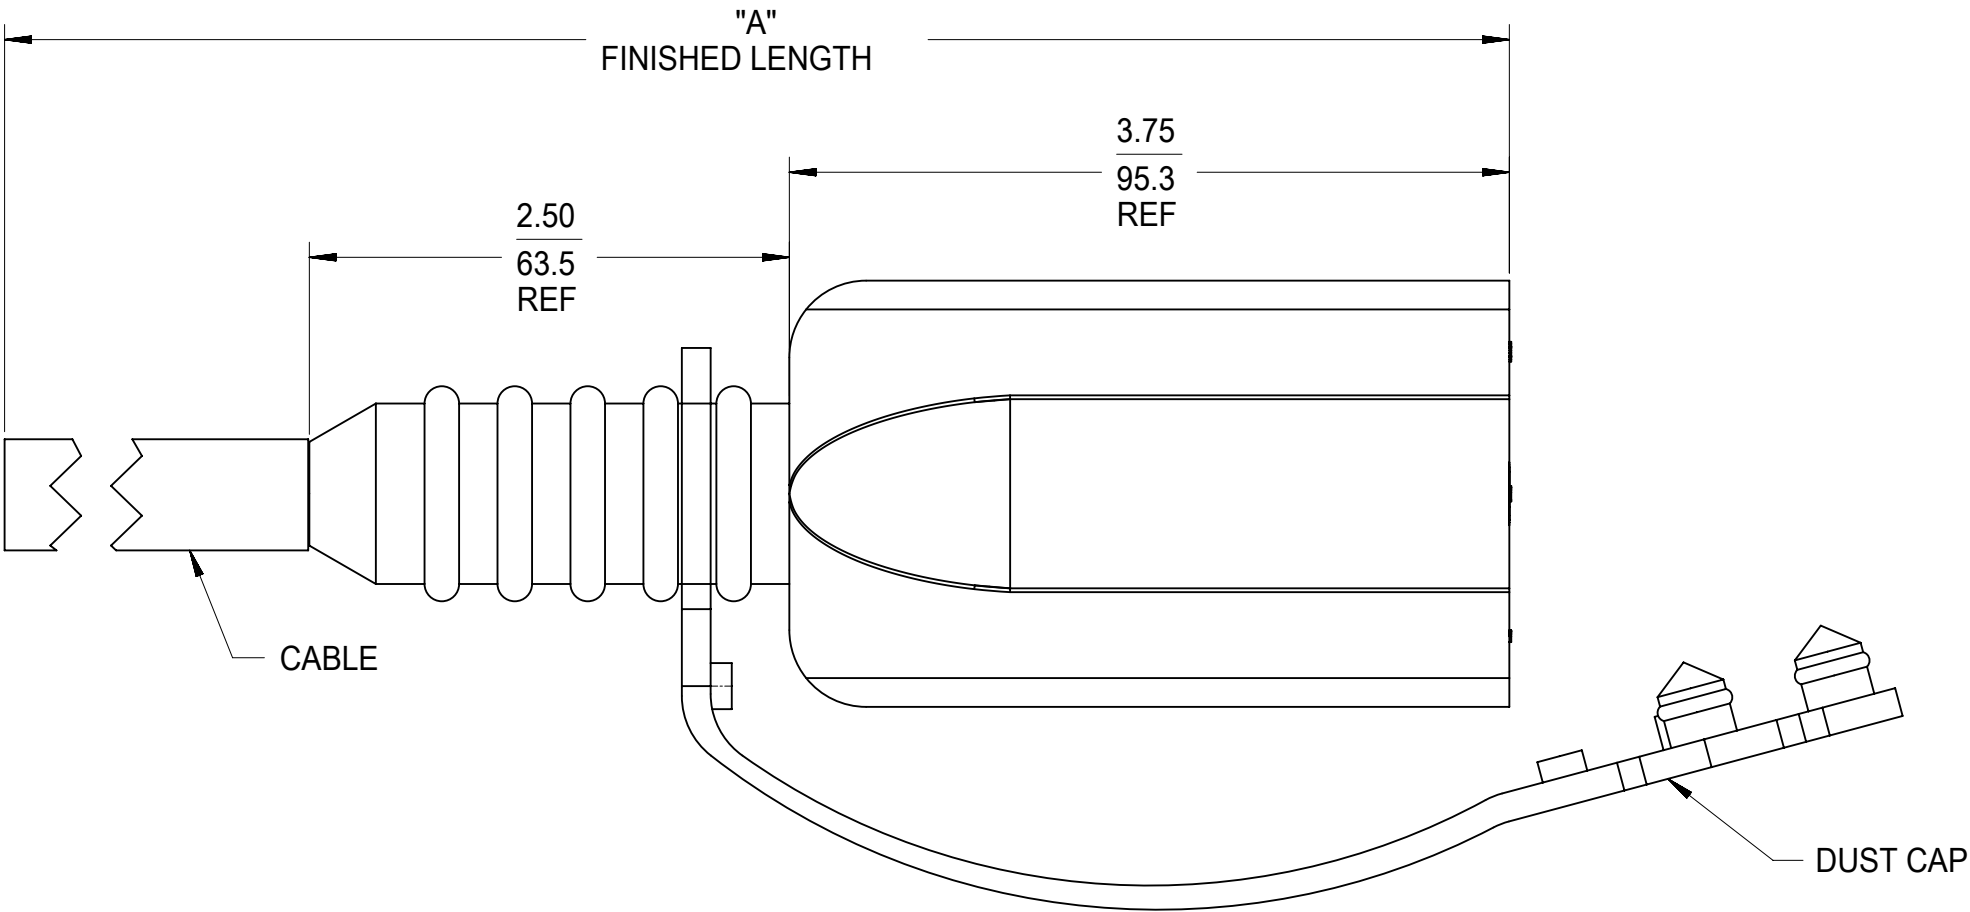
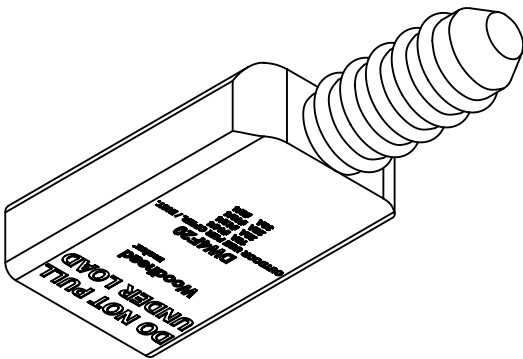


10	9	8	7	6	5	4	3	2	1
ASSEMBLY MATERIAL NUMBER	ENG. P/N	ASSEMBLY DESCRIPTION			"A" FINISHED LENGTH				
1301500325	DW4F20	FEMALE OVERMOLD CABLE ASSEMBLY, #8/4			6 FT				

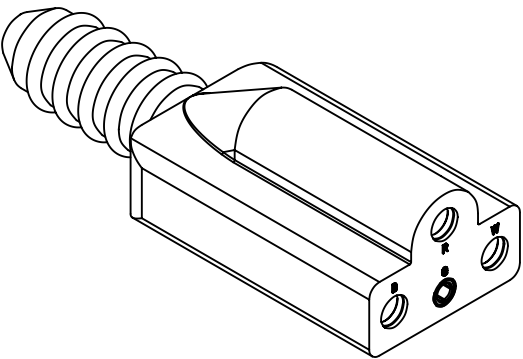

NOTES:
1) OVERMOLD MATERIAL: RUBBER (NEOPRENE OR CPE)
2) TERMINALS: COPPER ALLOY
3) CABLE JACKET MATERIAL: RUBBER (NEOPRENE OR CPE)
4) CABLE IS MSHA LISTED.
5) WARNING: DO NOT PULL UNDER LOAD.
6) VOLTAGE RATING: 600 V MAX.
7) CURRENT RATING:
8AWG/4 CONDUCTOR - 30 AMPS
10AWG/4 CONDUCTOR - 25 AMPS
12AWG/4 CONDUCTOR - 20 AMPS
14AWG/4 CONDUCTOR - 15 AMPS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS	SCALE	CURRENT REV DESC: MIGRATE TO NX. UPDATE NOTE 1 AND 3				molex			
INCH	NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 615559 DRWN: WLEUNG 2019/04/12 CHK'D: DNGUYEN62 2019/04/22 APPR: HKNEELAND 2019/04/23				FEMALE RECEPTACLE CABLE ASSEMBLY 15-30AMPS, #8 - #14AWG			
ANGULAR TOL	± 2.0 °	INITIAL REVISION:				PRODUCT CUSTOMER DRAWING			
4 PLACES	±	DRWN: WLEUNG 2013/11/07				DOCUMENT NUMBER		DOC TYPE	DOC PART
3 PLACES	±	APPR: BWOODMAN 2013/12/27				SD-130150-002		PSD	001
2 PLACES	±								B1
1 PLACE	± 0.03								
0 PLACES	±								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
			B-SIZE	130150	SEE CHART	GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2019/04/23	19:56:37
-----------------	----	--------------	------------	----------