
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 17955, CH	01/20/10	HM
B	UPDATE SR TO GTM21097 TYPE, RFS. 18625, BS	05/03/10	HM

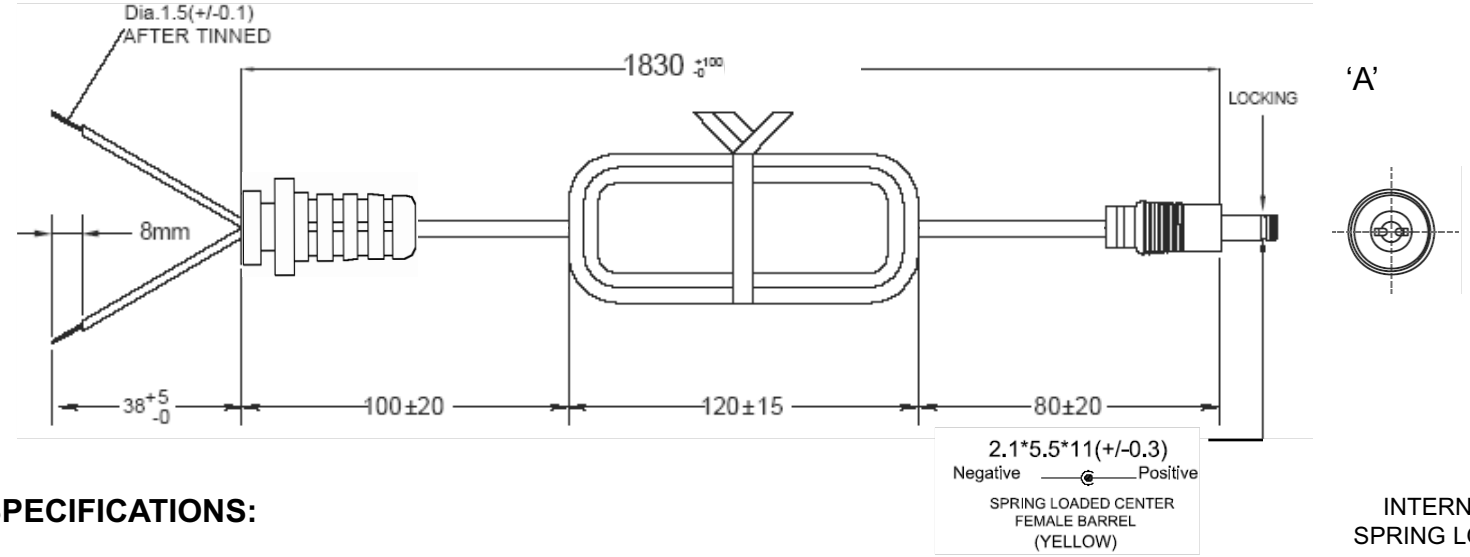

GENERAL SPECIFICATIONS:

VOLTAGE:	300 V
TEMPERATURE:	80°C
CABLE TYPE / SIZE:	SILICONE INSULATION SILICONE JACKET CABLE,24/0.20 STRANDING, 18 AWG(0.75 mm²) x 2C
CABLE JACKET COLOR:	BLACK
CONDUCTORS COLOR:	BLUE, BROWN
OVERALL LENGTH (L):	1830 + 100,-0 mm
END 'A' TERMINATION:	STRAIGHT FEMALE BARREL 5.5 x 2.1 x 11 mm (SPRING LOADED WITH LOCKING NOTCH)
END 'B' TERMINATION:	STRIP & TIN
STRAIN RELIEF:	SR FOR GTM21097 TYPE
APPROVALS CABLE:	DESIGN TO MEET UL, CSA or cUL
APPROVALS CONNECTOR:	N/A

INTERNAL VIEW
SPRING LOADED CENTER

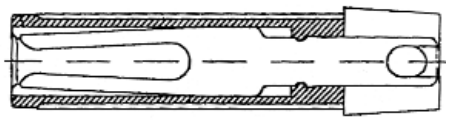

PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTE:
CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S) IF APPLICABLE.

OR

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

TOLERANCES:
DECIMALS .xx +/- 0.01 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .x +/- 1.0 .xx +/- 0.5 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: SILICONE JACKET OUTPUT CABLE ASSEMBLY WITH STRAIN RELIEF

INIT.BY: CH	DATE 01/20/10			
DRAWN: NF	DATE: 01/20/10	FSCN No.: G, CC	SIZE A	REV. B
APRVD: HM	DATE: 01/20/10	SCALE: NONE	PART NO: **CCP6186FSILI-SR(R)**	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.