

# EM907 Solder Paste

Lead-Free, No-Clean

---

## Product Description

EM907 Solder Paste is a lead-free, no-clean, air and nitrogen reflowable solder paste specifically designed for the thermal requirements of lead-free alloys, including the Sn96.5Ag3.0Cu0.5 alloy. The paste flux system allows joint appearances that closely resemble that achieved with SnPb alloys. EM907 is capable of stencil printing downtimes up to 60 minutes with an effective first print down to 20 mils without any kneading. EM907 also exhibits excellent continual printability for fine pitch (0.4 mm/16 mils) and is able to print at high speeds up to 6 in/s (150 mm/s).

## Performance Characteristics:

- Lead-free joints that closely resemble those achieved with SnPb solder paste
- Excellent solderability to a wide variety of surface metalizations, including NiAu, ImSn and ImAg
- High print speeds up to 150 mm/s
- Capable of 60 minute break times in printing
- Stencil life: 12+ hours (process dependent)
- Excellent printing characteristics to 16 and 20 mils pitch
- Excellent print and reflow characteristics for 0201 applications
- Stable tack life
- Classified as ROL1 per J-STD-004, J-STD-004A & J-STD-004B

## Standard Applications:

88.5% Metal: Stencil Printing

## RoHS Compliance

This product meets the requirements of the Restriction of Hazardous Substances (RoHS) Directive, 2015/863 for the stated banned substances.

## Physical Properties

(Data given for Sn96.5Ag3.0Cu0.5, 88% metal, -325+500 mesh)

**Viscosity (typical):** 1800 poise

Malcom Viscometer @ 10 rpm and 25 °C

**Initial Tackiness (typical):** 44 grams

Tested to J-STD-005, IPC-TM-650, Method 2.4.44

**Slump Test:** Pass

Tested to J-STD-005, IPC-TM-650, Method 2.4.35

**Solder Ball Test:** Preferred

Tested to J-STD-005, IPC-TM-650, Method 2.4.43

**Wetting Test:** Pass

Tested to J-STD-005, IPC-TM-650, Method 2.4.45

## Reliability Properties

**Copper Mirror Corrosion:** Low

Tested to J-STD-004, IPC-TM-650, Method 2.3.32

**Corrosion Test:** Low

Tested to J-STD-004, IPC-TM-650, Method 2.6.15

**Fluorides by Spot Test:** Pass

Tested to J-STD-004, IPC-TM-650, Method 2.3.35.1

**Surface Insulation Resistance (SIR) (Typical):** Pass

Tested to J-STD-004, IPC-TM-650, Method 2.6.3.3

	Blank	EM907
Day 1	$1.1 \times 10^{10} \Omega$	$7.7 \times 10^8 \Omega$
Day 4	$1.5 \times 10^{10} \Omega$	$1.2 \times 10^9 \Omega$
Day 7	$1.4 \times 10^{10} \Omega$	$1.4 \times 10^9 \Omega$


## Availability

EM907 is available in the Sn96.5Ag3.0Cu0.5 and Sn96.5Ag3.5 alloys. Type 3 powder mesh is normally recommended, but type 4 is available for fine pitch applications. EM907 is also compatible with other SnAgCu alloys in a similar melting range to the listed alloys. For specific packaging information, see Kester's Paste Packaging Chart for available sizes. The appropriate combination depends on process variables and the specific application.

## Printing Parameters

<b>Squeegee Blade</b>	80 to 90 durometer polyurethane or stainless steel
<b>Squeegee Speed</b>	Capable to a maximum speed of 150 mm/sec (6 in/sec)
<b>Stencil Material</b>	Stainless Steel, Molybdenum, Nickel Plated, Brass
<b>Temperature/Humidity</b>	Optimal ranges are 21 to 25 °C (70 to 77 °F) and 35 to 65% RH

## Recommended Reflow Profile

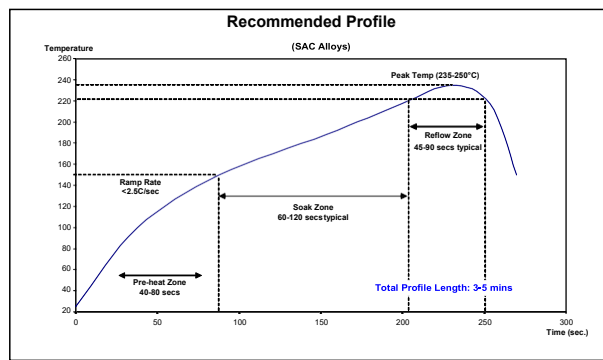

Full convection reflow method is most commonly used to reflow the EM907 formula. The recommended convection reflow profile for EM907 made with either the Sn96.5Ag3.5 or SnAgCu alloys is shown here.

## Cleaning

EM907 is a no-clean formula. The residues do not need to be removed for typical applications. Although EM907 is designed for no-clean applications, its residues can be easily removed using automated cleaning equipment (in-line or batch) with a variety of readily available cleaning agents. Call Kester Technical Support for details.

## Recycling Services

We provide safe and efficient recycling services to help companies meet their environmental and legislative requirements and at the same time, maximize the value of their waste streams.

Our service collects solder dross, solder scrap, and various forms of solder paste waste. Please contact your local sales representative for recycling capabilities in your area or [link here](#).



## Storage, Handling and Shelf Life

Refrigeration is the recommended optimum storage condition for solder paste to maintain consistent viscosity, reflow characteristics, and overall performance. EM907 should be stabilized at room temperature prior to printing. EM907 should be kept at standard refrigeration temperatures, 0 to 10 °C (32 to 50 °F). Please contact Kester Technical Support if you require additional advice with regard to storage and handling of this material. Shelf life is 4 months from date of manufacture and held at 0 to 10 °C (32 to 50 °F).

## Health and Safety

This product, during handling or use, may be hazardous to your health or the environment. Read the Safety Data Sheet and warning label before using this product. Safety Data Sheets are available at this [link](#).

## Contact Information

To confirm this document is the most recent version, please contact [Assembly@MacDermidAlpha.com](mailto:Assembly@MacDermidAlpha.com)

<p><b>North America</b> 109 Corporate Blvd. South Plainfield, NJ 07080, USA 1.800.253.7837</p>	<p><b>Europe</b> Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400</p>	<p><b>Asia Pacific</b> 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p>
--	--	---

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "R" and "TM" are registered trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.