

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0190030138**  
**Status:** **Active**  
**Overview:** Standard Quick-Disconnect Terminals  
**Description:** InsulKrimp Quick Disconnect, Female, Box, Tab 4.75 x 0.51mm

**Documents:**

[3D Model](#) [Product Specification PS-19902-011-001 \(PDF\)](#)  
[3D Model \(PDF\)](#) [Product Specification PS-19902-013-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-19902-008-001 \(PDF\)](#)

**General**

Product Family Quick Disconnects  
Series 19003  
Comments Funnel Entry  
Crimp Quality Equipment Yes  
Insulated Fully  
Overview [Standard Quick-Disconnect Terminals](#)  
Product Name InsulKrimp  
Taxonomy Quick Disconnects  
Type Quick Disconnect  
UPC 800756386799

**Physical**

Barrel Type Closed  
Color - Resin Yellow  
Gender Female  
Glow-Wire Capable No  
Insulation Nylon (PA)  
Lock to Mating Part None  
Material - Metal Brass  
Material - Plating Mating Tin  
Material - Plating Termination Tin  
Material - Resin Nylon  
Net Weight 0.800/g  
Orientation Straight  
Packaging Type Bag  
Plating min - Mating 4.064µm  
Plating min - Termination 4.064µm  
Polarized to Mating Part No  
Tab Thickness 0.51mm  
Tab Width 4.75mm  
Temperature Range - Operating -65° to +105°C  
Termination Interface: Style Crimp or Compression  
Wire Size AWG 24, 26

**Electrical**


Voltage - Maximum 600V

**Material Info**

Engineering Number M-2210V

**Reference - Drawing Numbers**

Product Specification PS-19902-008-001, PS-19902-011-001,  
PS-19902-013-001  
Sales Drawing SD-19003-003-001

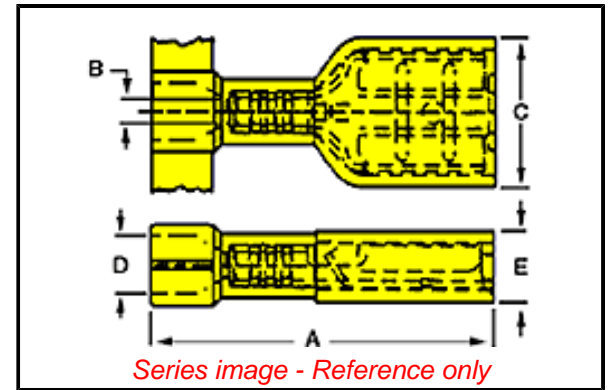

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

19003 Series

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

PremiumGrade  
Hand Crimp Tool for  
Insulkrimp Female  
Fully Insulated Quick  
Disconnect, 24-26  
AWG

640015200

This document was generated on 08/27/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**