


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	CABLE TIE			PUSH MOUNT	DIMENSIONS				COLOR	WEIGHT grams/100pcs
	MIN TENSILE	MAX BUNDLE	MATERIAL	MATERIAL	"A"	"B"	"C" (REF)	"D" (REF)		
PUM071-R1S-_30	50 LBS (222 N)	1.0 " (51 MM)	NYLON 6.6 WEATHER RESISTANT BLACK	NYLON 6.6 HEAT STABILIZED BLACK	16.9	10.4	16.5	122	BLACK	133
PUM071-R15S-_30	50 LBS (222 N)	1.5 " (51 MM)	NYLON 6.6 HEAT STABILIZED BLACK		16.9	10.4	16.5	160	BLACK	156



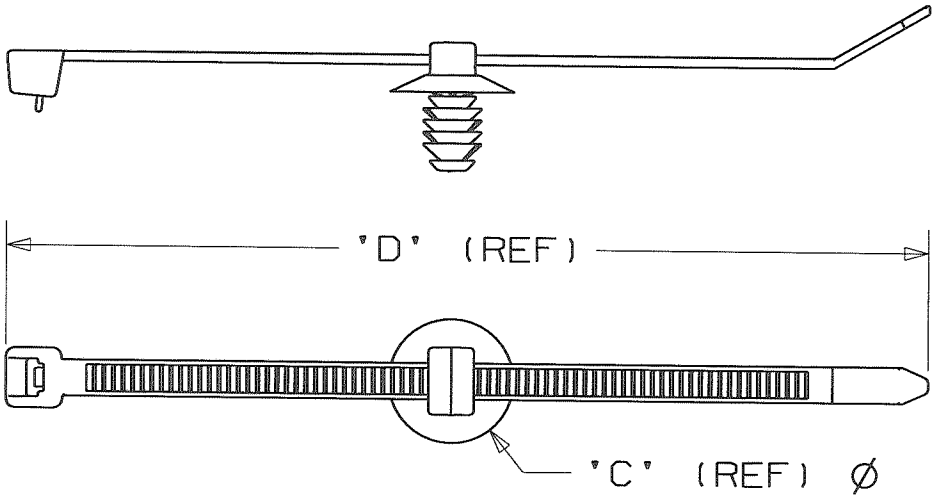

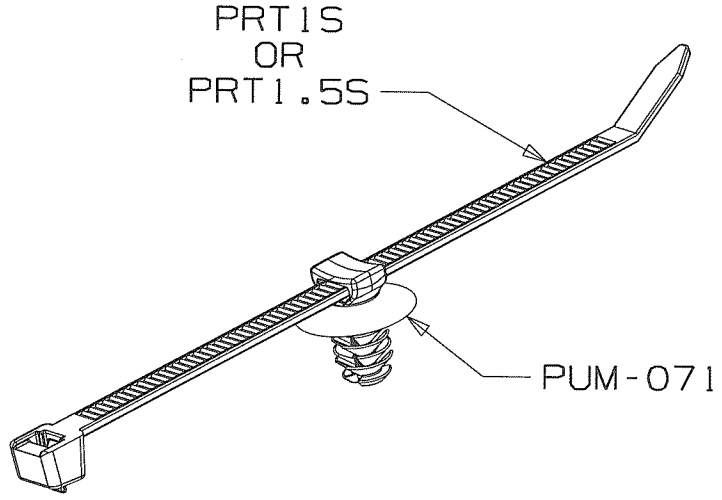

NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
3. APPLICATION SPECIFICATION:
   A. NOMINAL HOLE DIAMETER: 6.3 - 7.1 mm
   B. NOMINAL PANEL THICKNESS: 0.8 - 7.0 mm

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	
00C	11/7/08	PSG	LKP	CHANGED DIMENSION 'D'	GB3597AA	00C	KLN	
00B	10/29/08	PSG		CHANGED PANDUIT PART NUMBERS AND MATERIALS	GB3597AA	00B		
00A	10/6/08	PSG		INITIAL RELEASE	GB3597AA	00A		

CAD FILENAME/LAYERS: G03597AA_DC_GB3597AA/00C

PANDUIT CORP. TINLEY PARK, ILLINOIS

PUM071-R1S-_30 & PUM071-R15S-_30 PUSH MOUNT/CABLE TIE ASSEMBLY

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN METRIC
TOLERANCE: ±0.5MM

DRAWN BY: PSG	MAT'L: SEE TABLE	SCALE: 1:1	
DATE: 10/1/08		DRAWING NO.: GB3597AA	DWG: A SIZE
CHK'D: KLN			