



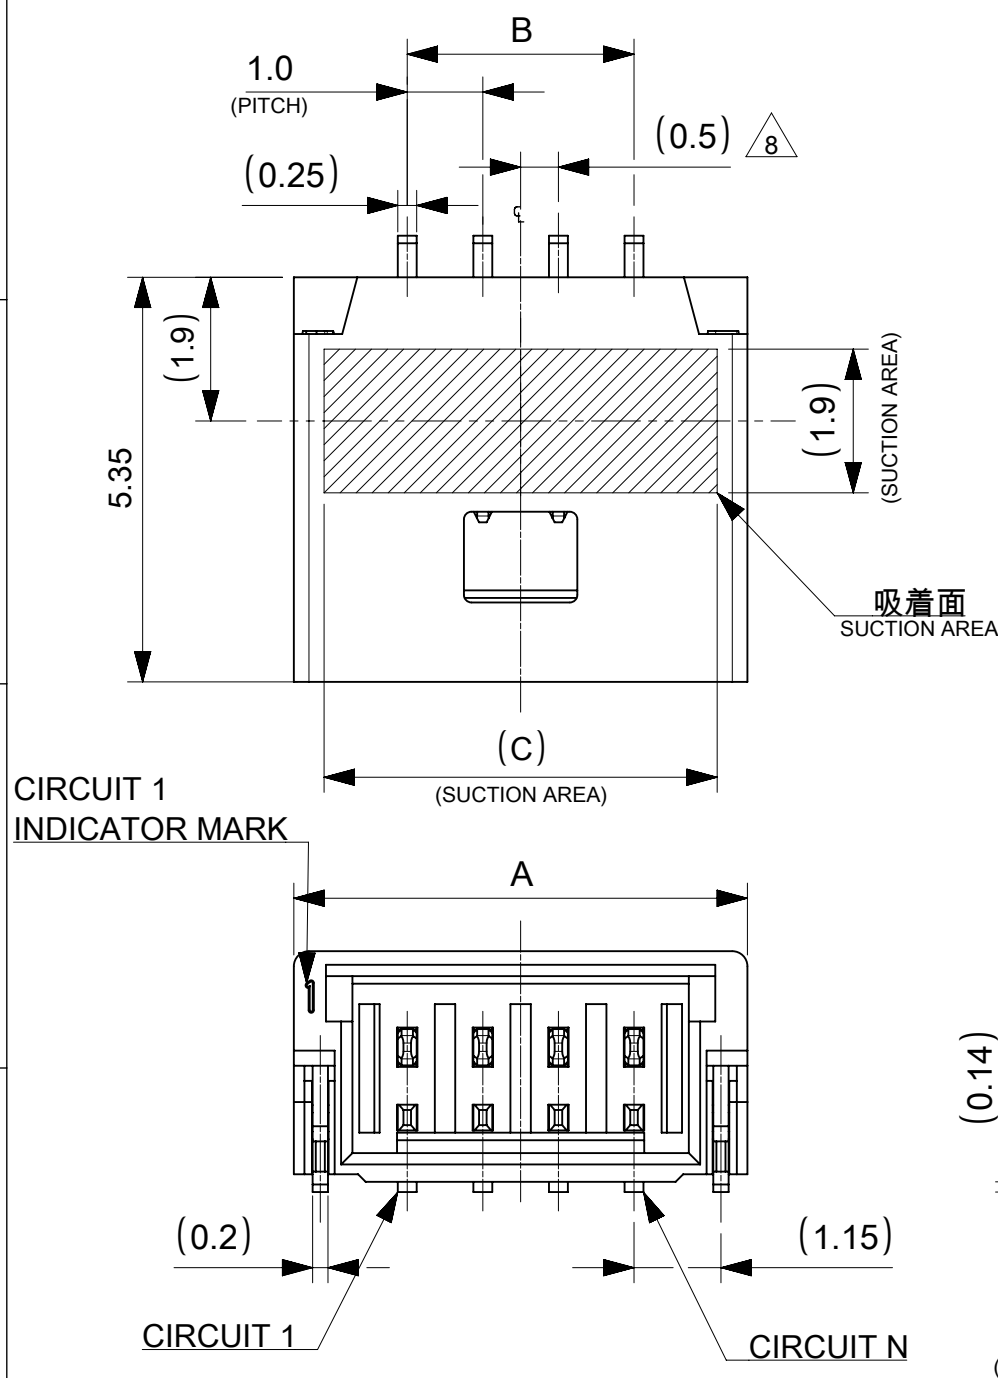


2 TABLE 1


番号 NO.	部品 PART	材質 MATERIAL				
①	ウエハー WAFER	ポリアミド(PA), UL94V-0, 色 : SEE SHEET 6 POLYAMIDE(PA), UL94V-0, COLOR : SEE SHEET 6				
②	ソルダーピン SOLDER PIN	リン青銅 PHOSPHOR BRONZE				
		接点部 CONTACT AREA		金めっき : 0.38 MICRO-METER MIN. GOLD PLATING		
		テール部 TAIL AREA		金めっき : 0.05 MICRO-METER MIN. GOLD PLATING		
		下地めっき UNDER PLATING		ニッケルめっき : 1.27 MICRO-METER MIN. NICKEL		
③	ネイル NAIL	黄銅 BRASS				
		テール部 TAIL AREA		錫めっき : 1.0 MICRO-METER MIN. MATTE TIN PLATING		
		下地めっき UNDER PLATING		ニッケルめっき : 1.0 MICRO-METER MIN. NICKEL		
DOCUMENT STATUS		P1	RELEASE DATE	2022/03/08	09:37:19	

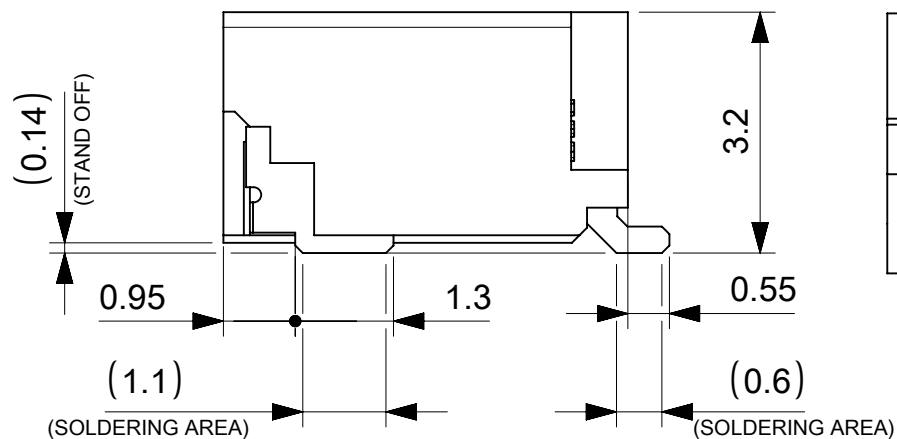


PLATING	PLATING THICKNESS [micro-meter MIN.]	SERIES No.	DRAWING No.
TIN	1.0	501568	5015680000-SD PSD 000
GOLD	0.1	202396	2023960000-SD PSD 000
	0.76	203559	2035590000-SD PSD 000

6.2	4.0	7.0	5
5.2	3.0	6.0	4
4.2	2.0	5.0	3
3.2	1.0	4.0	2
C	B	A	極数 CIRCUIT SIZE

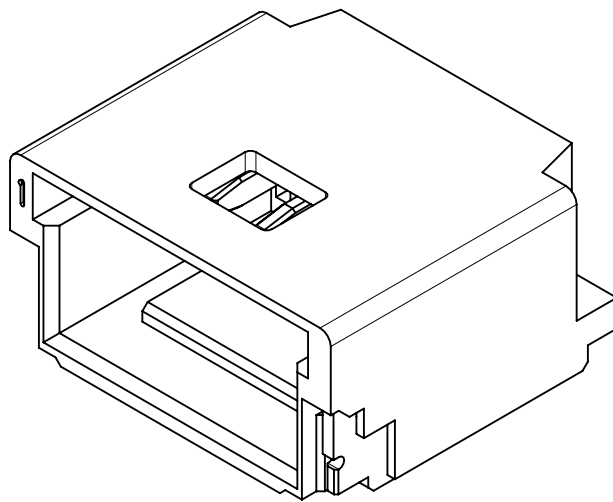


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.38 MICRO-METER							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL ± 3.0 °															
4 PLACES		± 0.2		EC NO: 698195				PRODUCT CUSTOMER DRAWING							
3 PLACES		± 0.2		DRWN: MIKEDA01 2022/02/28											
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2022/03/08											
1 PLACE		± 0.2		APPR: AIDA 2022/03/08				DOCUMENT NUMBER 2035580000-SD							
0 PLACES		± 0.2		INITIAL REVISION:											
				DRWN: AISHIKAWA 2019/04/02											
				APPR: KOMURAKAMI 2019/04/05				DOC TYPE PSD							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		203558		SEE SHEET 6				1 OF 6	

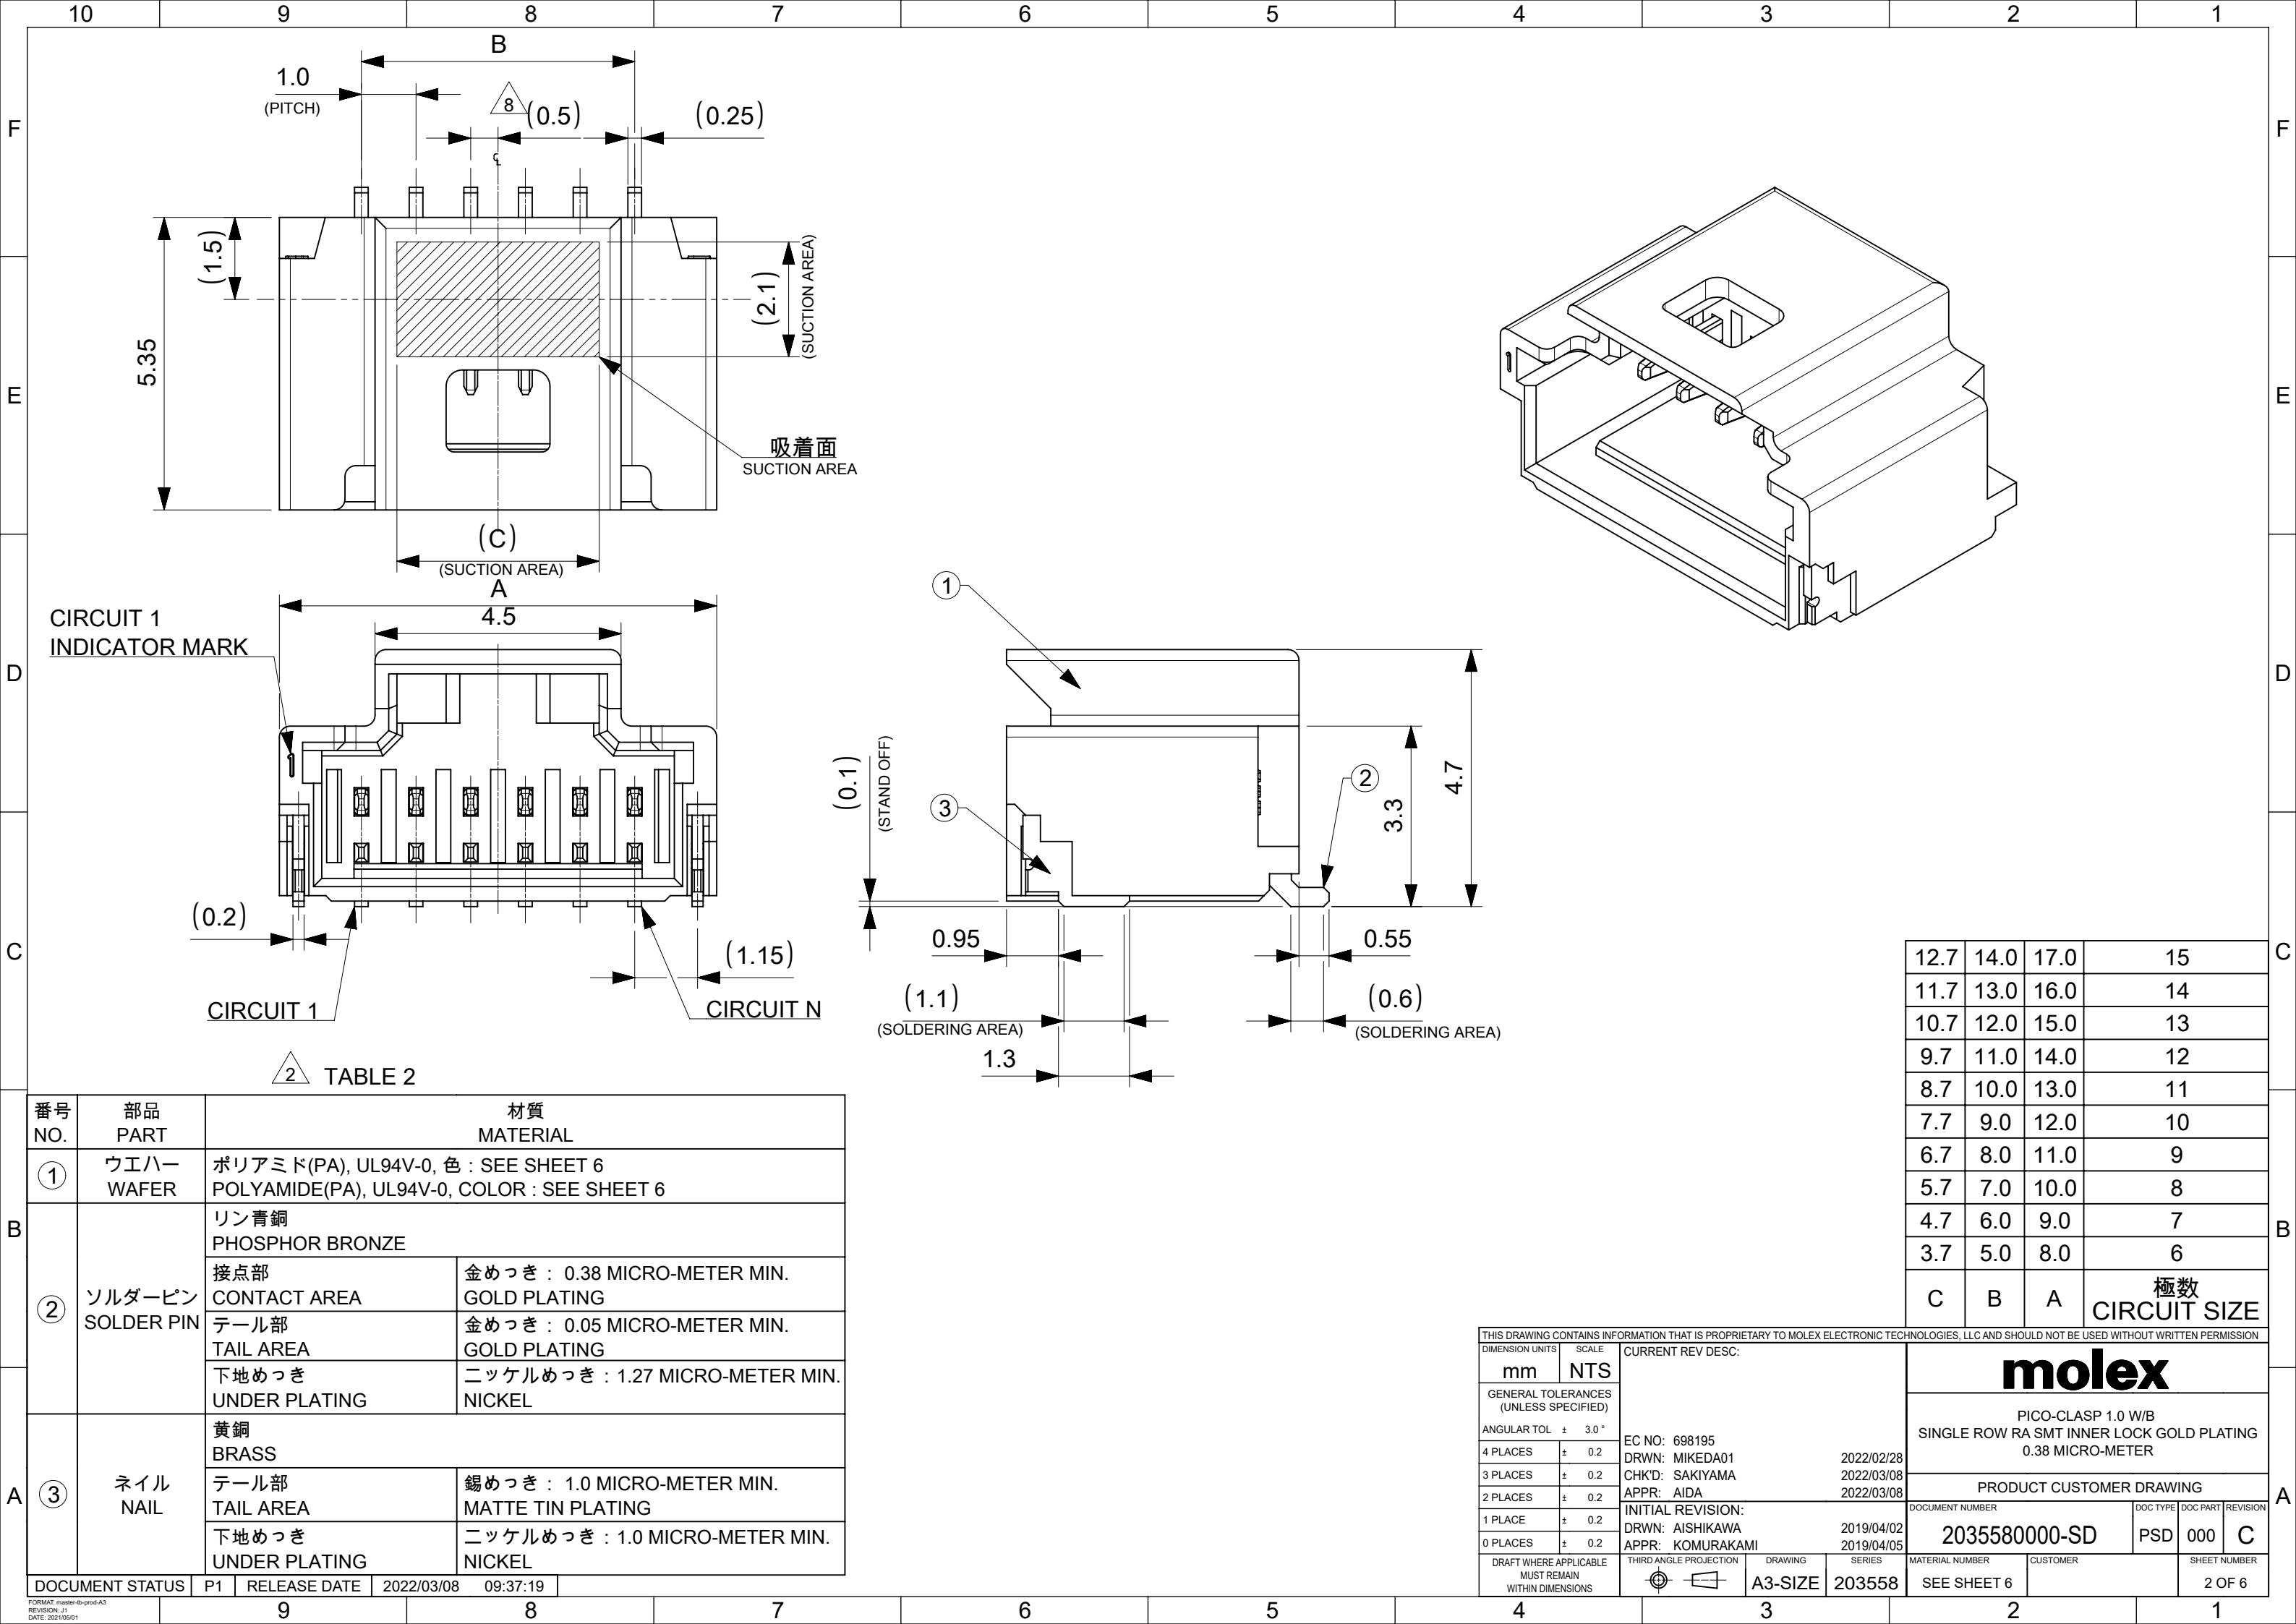




番号 NO.	部品 PART	材質 MATERIAL	
①	ウエハー WAFER	ポリアミド(PA), UL94V-0, 色 : SEE SHEET 6 POLYAMIDE(PA), UL94V-0, COLOR : SEE SHEET 6	
②	ソルダーピン SOLDER PIN	リン青銅 PHOSPHOR BRONZE	
		接点部 CONTACT AREA	金めっき : 0.38 MICRO-METER MIN. GOLD PLATING
		テール部 TAIL AREA	金めっき : 0.05 MICRO-METER MIN. GOLD PLATING
③	ネイル NAIL	下地めっき UNDER PLATING	ニッケルめっき : 1.27 MICRO-METER MIN. NICKEL
		黄銅 BRASS	
		テール部 TAIL AREA	錫めっき : 1.0 MICRO-METER MIN. MATTE TIN PLATING
		下地めっき UNDER PLATING	ニッケルめっき : 1.0 MICRO-METER MIN. NICKEL

DOCUMENT STATUS	P1	RELEASE DATE	2022/03/08	09:37:19
-----------------	----	--------------	------------	----------

12.7	14.0	17.0	15
11.7	13.0	16.0	14
10.7	12.0	15.0	13
9.7	11.0	14.0	12
8.7	10.0	13.0	11
7.7	9.0	12.0	10
6.7	8.0	11.0	9
5.7	7.0	10.0	8
4.7	6.0	9.0	7
3.7	5.0	8.0	6
C	B	A	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:		molex PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.38 MICRO-METER									
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL ± 3.0 °				EC NO: 698195 DRWN: MIKEDA01 2022/02/28 CHK'D: SAKIYAMA 2022/03/08 APPR: AIDA 2022/03/08		PRODUCT CUSTOMER DRAWING									
4 PLACES ± 0.2															
3 PLACES ± 0.2															
2 PLACES ± 0.2															
1 PLACE ± 0.2		INITIAL REVISION: DRWN: AISHIKAWA 2019/04/02 APPR: KOMURAKAMI 2019/04/05		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION					
0 PLACES ± 0.2				2035580000-SD		PSD		000		C					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		203558		SEE SHEET 6				2 OF 6	

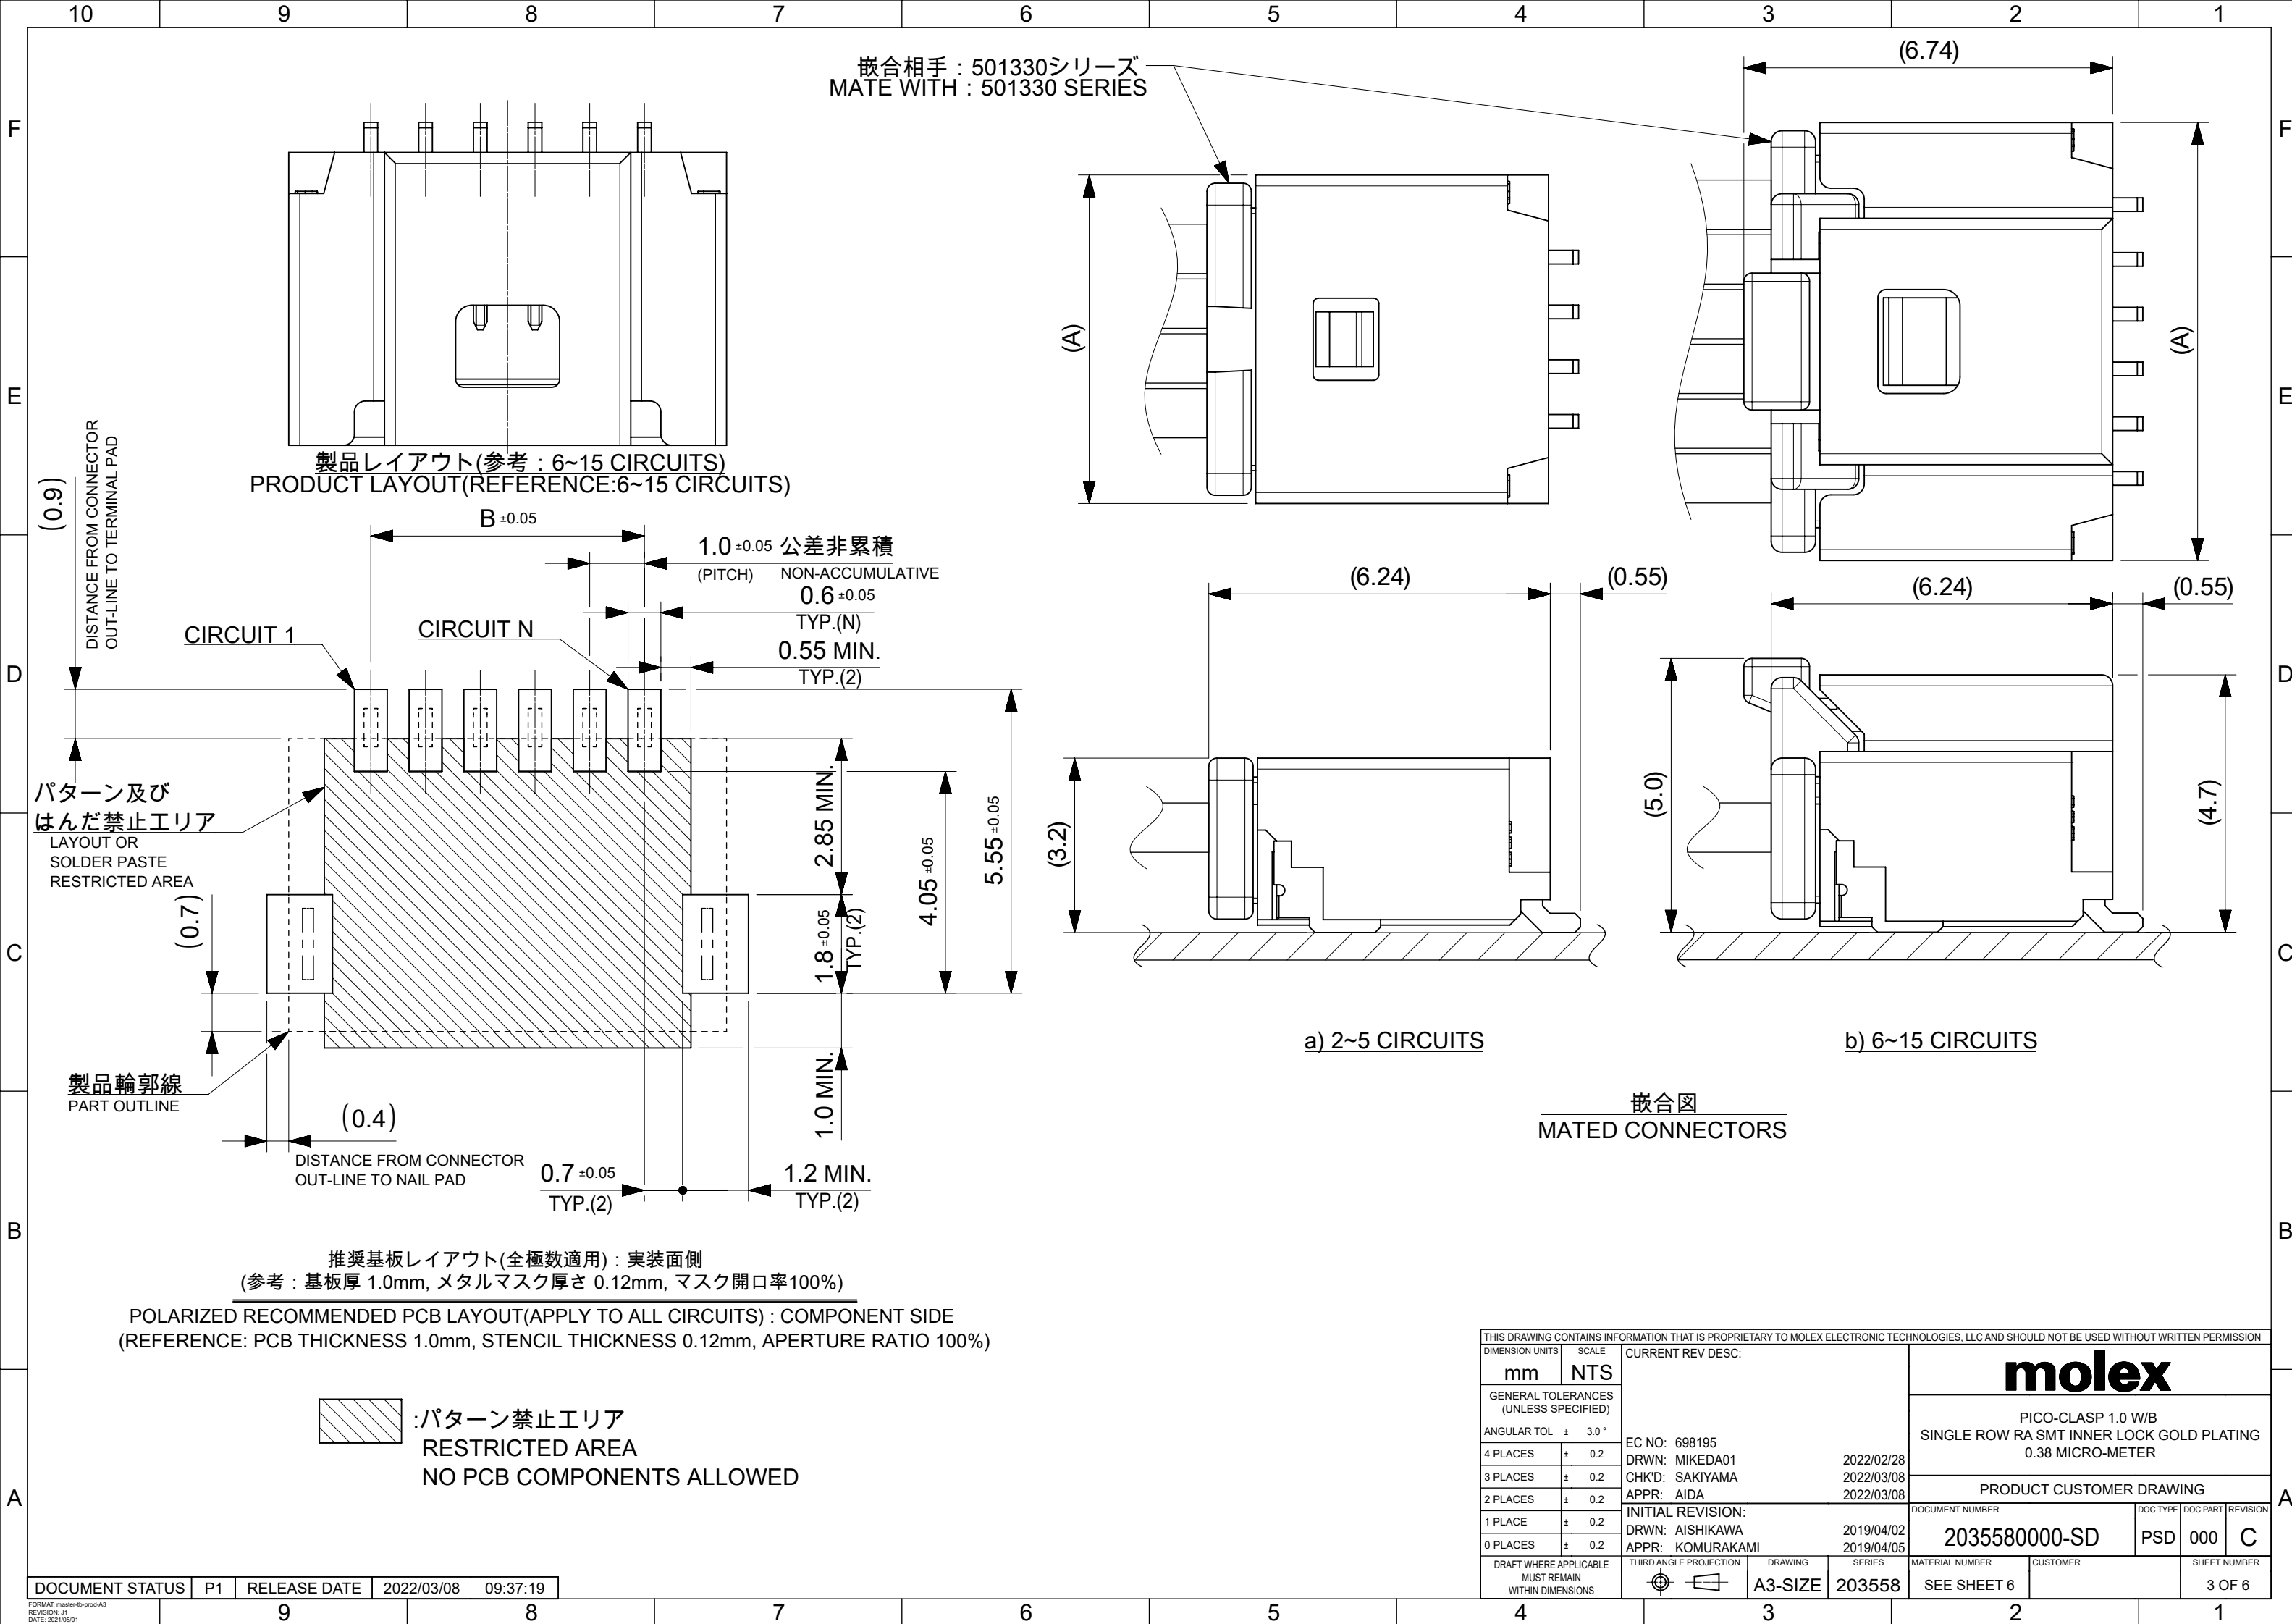


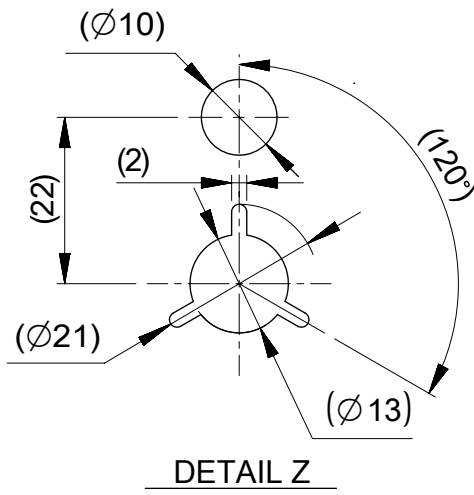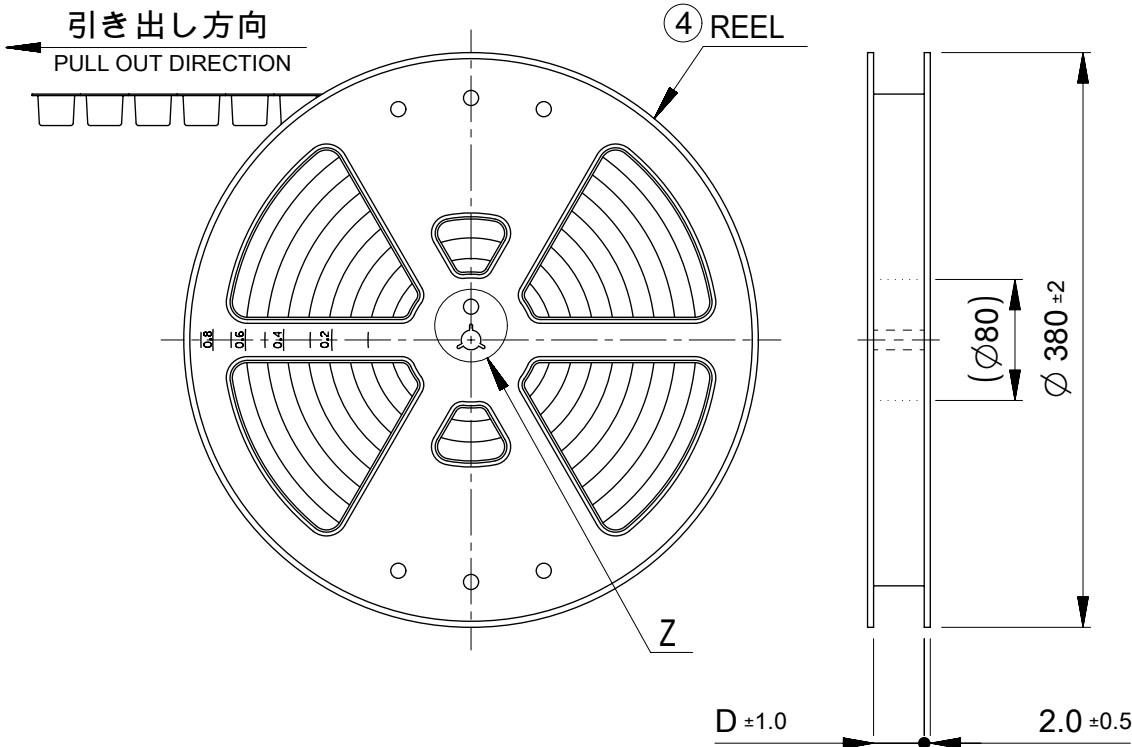

NOTES

10. 梱包数量
2-5 CIRCUIT: 1700個/リール
6-15 CIRCUIT: 1300個/リール
NUMBER OF CONNECTORS
2-5 CIRCUIT : 1700 PIECES/REEL
6-15 CIRCUIT : 1300 PIECES/REEL

11. リードテープ長さ
LEAD TAPE LENGTH

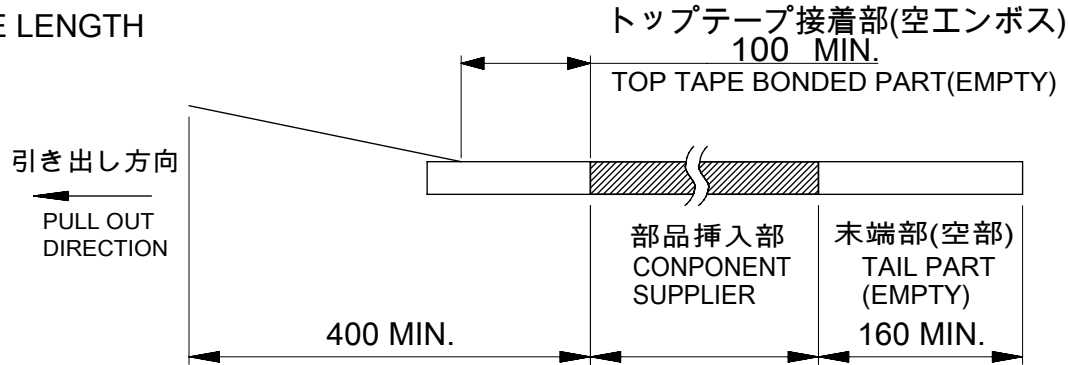


12. トップテープの剥離強度はIEC60286-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.
- △13 2~5極品は乾燥剤入り、ハイバリア梱包による納品となります。
2~5 CIRCUITS IS DELIVERED IN A HIGH BARRIER PACKAGING WITH DESICCANT.
14. 梱包仕様書 : 2035589200 PS 200
PACKAGE SPECIFICATION:
- △15 発注番号 : SHEET 6 参照
ORDER No. : PLEASE REFER TO SHEET 6 FOR PRODUCT LIST.


203558 - ** * *

極数	ハウジングカラー	製品識別番号
CIRCUIT SIZE	HOUSING COLOR	IDENTIFICATION NUMBER
	0:NATURAL(BEIGE)	7:EMBOSSED PACKAGE

番号 NO.	部品 PART	材質 MATERIAL
④	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS	P1	RELEASE DATE	2022/03/08	09:37:19
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex						
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)							PICO-CLASP 1.0 W/B						
ANGULAR TOL ± 3.0 °							SINGLE ROW RA SMT INNER LOCK GOLD PLATING						
4 PLACES ± 0.2							0.38 MICRO-METER						
3 PLACES ± 0.2				CHK'D: SAKIYAMA 2022/03/08			PRODUCT CUSTOMER DRAWING						
2 PLACES ± 0.2				APPR: AIDA 2022/03/08									
1 PLACE ± 0.2				INITIAL REVISION:			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
0 PLACES ± 0.2				DRWN: AISHIKAWA 2019/04/02			2035580000-SD		PSD	000	C		
APPR: KOMURAKAMI 2019/04/05				THIRD ANGLE PROJECTION			DRAWING		SERIES		MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						A3-SIZE		203558		SEE SHEET 6		4 OF 6	

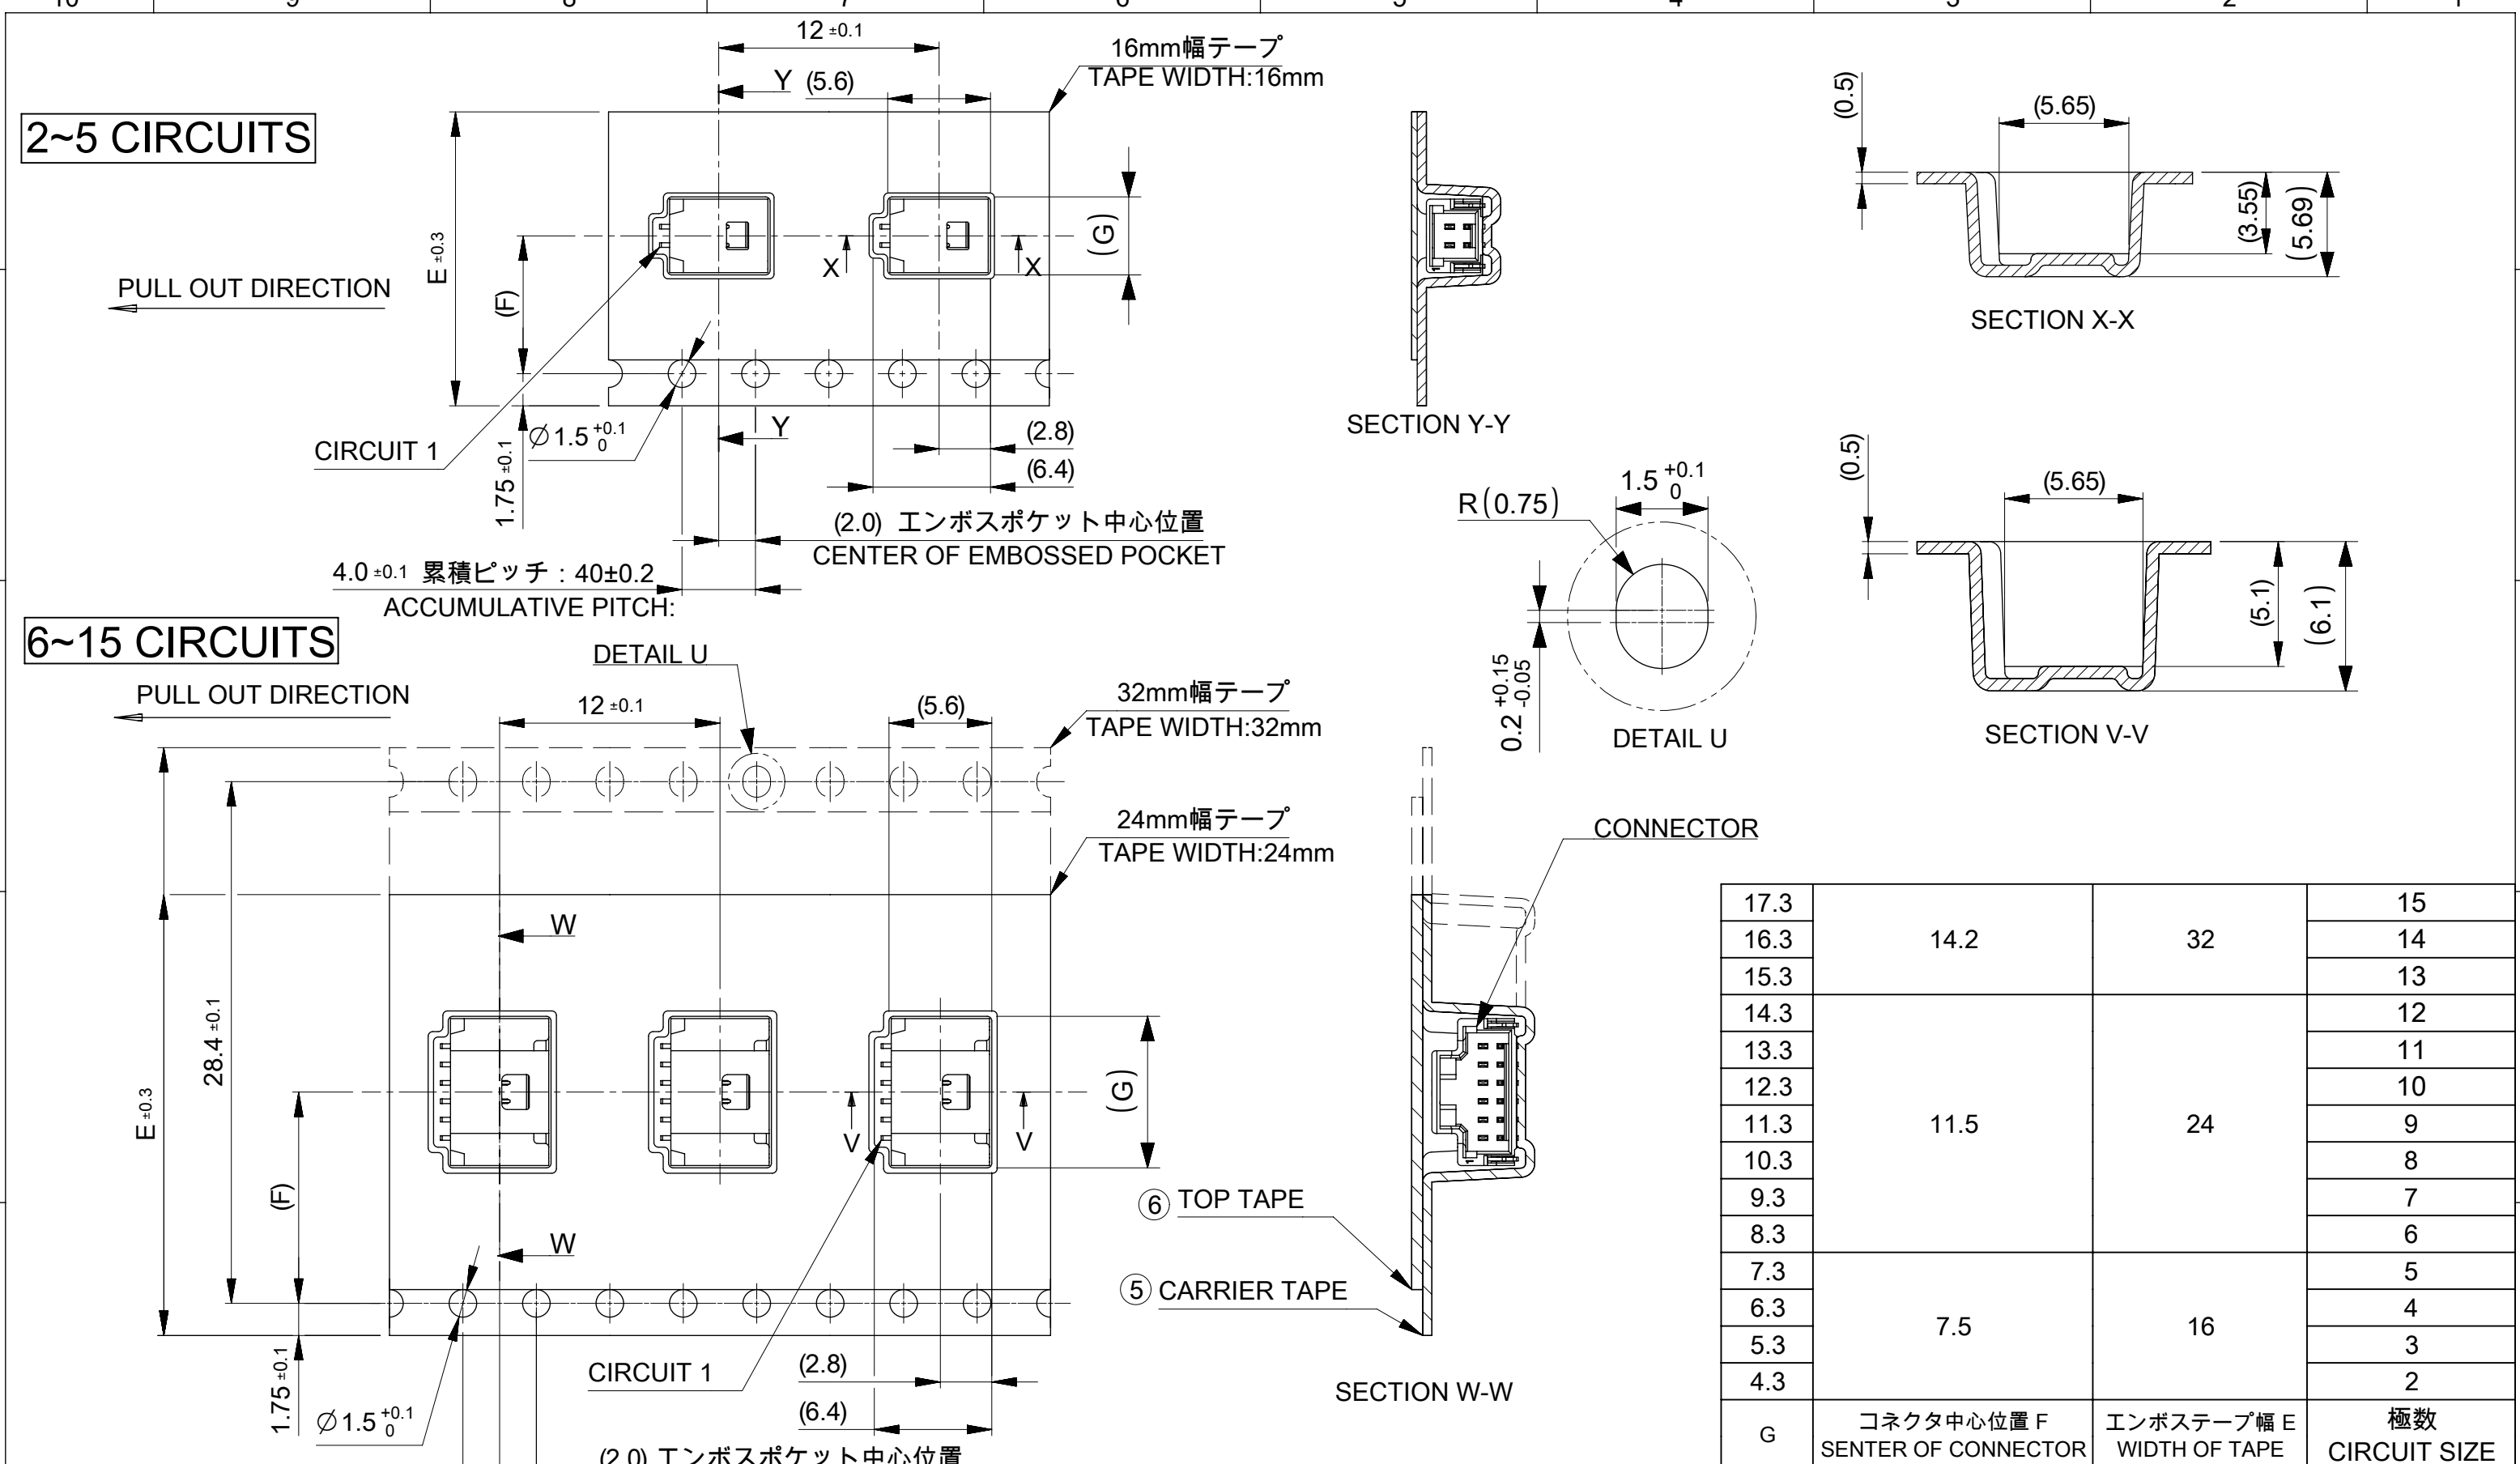

17.3	14.2	32	15
16.3			14
15.3			13
14.3	11.5	24	12
13.3			11
12.3			10
11.3			9
10.3			8
9.3			7
8.3	7.5	16	6
7.3			5
6.3			4
5.3			3
4.3			2
G	コネクタ中心位置 F SENER OF CONNECTOR	エンボステープ幅 E WIDTH OF TAPE	極数 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL
⑤	キャリアテープ CARRIER TAPE	ポリプロピレン(PP)、その他 POLYPROPYLENE(PP), etc
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc

DOCUMENT STATUS	P1	RELEASE DATE	2022/03/08	09:37:19
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE	CURRENT REV DESC: EC NO: 698195 DRWN: MIKEDA01 CHK'D: SAKIYAMA APPR: AIDA INITIAL REVISION: DRWN: AISHIKAWA APPR: KOMURAKAMI THIRD ANGLE PROJECTION   DRAWING A3-SIZE SERIES 203558				molex PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK GOLD PLATING 0.38 MICRO-METER			
mm		NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)							PRODUCT CUSTOMER DRAWING			
ANGULAR TOL ± 3.0 °										
4 PLACES ± 0.2										
3 PLACES ± 0.2			DOCUMENT NUMBER 2035580000-SD				DOC TYPE PSD	DOC PART 000	REVISION C	
2 PLACES ± 0.2										
1 PLACE ± 0.2										
0 PLACES ± 0.2			MATERIAL NUMBER SEE SHEET 6				CUSTOMER		SHEET NUMBER 5 OF 6	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

10	9	8	7	6	5	4	3	2	1