



FRONT VIEW - MALE M12




1-WHITE/ORANGE
2-WHITE/GREEN
3-ORANGE
4-GREEN

FRONT VIEW - MALE RJ45



1-WHITE/ORANGE
2-ORANGE
3-WHITE/GREEN
6-GREEN

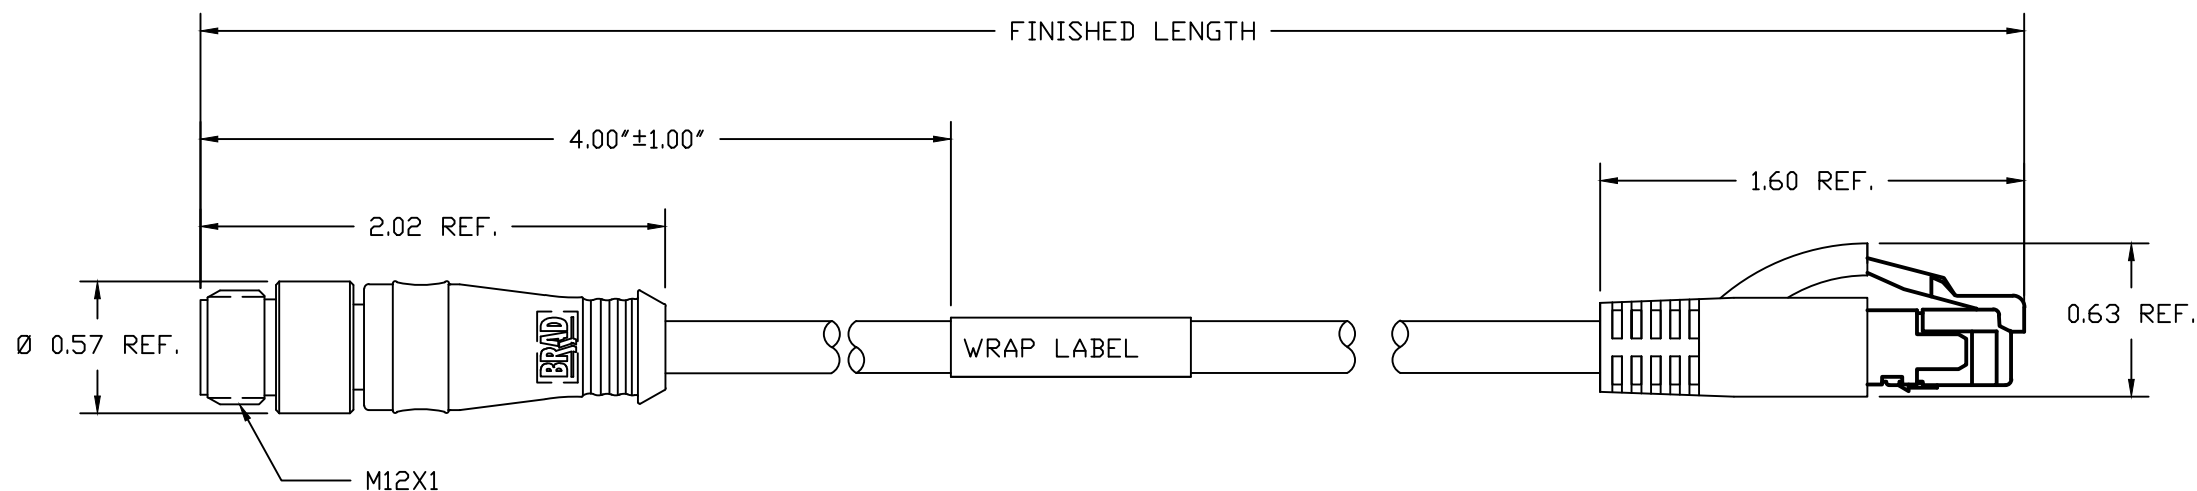

NOTES:

MECHANICAL

RJ45
PLUG: CLEAR POLYCARBONATE
BOOT: BLACK PVC

M12 CONNECTOR

INSERT: BLACK PUR
CONTACT: GOLD/NICKEL OVER COPPER ALLOY
COUPLING NUT: NICKEL PLATED BRASS
MOLDED BODY: BLACK PUR

CABLE: 24 AWG 2 PAIR CONDUCTORS BLUE TPE JACKET

UL LISTED: CMR
CSA LISTED: CMG
BELDEN P/N: YM53146006R

WRAP LABEL: MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE

ELECTRICAL

ACCORDING TO CAT5e
VOLTAGE RATING: 30V AC/DC
AMPERAGE: 1.5A

ADDED PART NO. TABLE EC NO: IPG2015-2010 DRWN: GGUSTAFS 2015/05/22 CHKD: BARDEN 2015/07/16 APPR: BWOODMAN 2013/04/18	REV C	DESCRIPTION QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
					INCH ONLY		NTS	INCH	
					DRAWN BY DATE		TITLE		
					APPROVED BY DATE		DOCUMENT NO.		
		ANGULAR ±.5°		MATERIAL NO.		SEE TABLE		SD-120108-053	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 2	

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F

E

D

C

B

A

MATERAIL NO.	ENGINEERING NO.
1201088184	E16A06006M005
1201088148	E16A06006M010
1201088149	E16A06006M020
1201088150	E16A06006M030
1201088151	E16A06006M040
1201088152	E16A06006M050
1201088153	E16A06006M060
1201088154	E16A06006M070
1201088155	E16A06006M080
1201088156	E16A06006M090
1201088157	E16A06006M100
1201088158	E16A06006M120
1201088185	E16A06006M140
1201088159	E16A06006M150
1201088160	E16A06006M180
1201088161	E16A06006M200
1201088162	E16A06006M250
1201088163	E16A06006M300
1201088164	E16A06006M400
1201088165	E16A06006M500

E16A06006MXXX

↓
LENGTH
M010 - 1 Meters
M050 - 5 Meters
M200 - 20 Meters
ETC....

ADDED PART NO. TABLE EC NO: IPG2015-2010 DRWN: GGUSTAFS 2015/05/22 CHKD: BARDEN 2015/07/16 APPR: BWOODMAN 2013/04/18	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		▽=0 ▽C=0	mm	INCH	DRAWN BY	DATE	TITLE M12 TO RJ45 CORDSET 4P MALE M12/RJ45 ST #24-2P BLUE TPE CAT5E MOLEX INCORPORATED	DOCUMENT NO. SD-120108-053	SHEET NO. 2 OF 2	
			4 PLACES	±---	±---	BARDEN				2013/01/29
			3 PLACES	±---	±.005	CHECKED BY				DATE
2 PLACES	±0.13	±.010	VOU	2013/04/26						
1 PLACE	±0.25	±.020	APPROVED BY	DATE	MATERIAL NO. SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±.5°								

10 9 8 7 6 5 4 3 2 1