



MALE INSERT - FACE VIEW

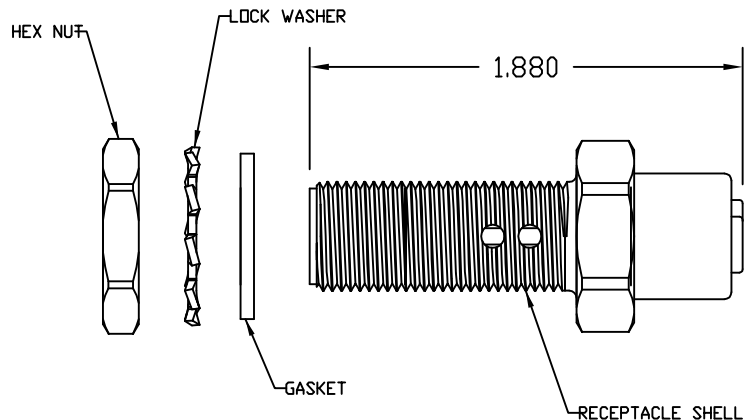

FEMALE INSERT - FRONT VIEW

NOTES:

MATERIALS:

RECEPTACLE SHELL: STAINLESS STEEL OR NI PLATED BRASS
CONTACTS: GOLD/NICKEL OVER COPPER ALLOY
INSERTS: BLACK ZYTEL(NYLON)
LOCKNUT: NI PLATED BRASS
LOCKWASHER: ZINC PLATED STEEL
GASKET: BLACK NITRILE RUBBER

ELECTRICAL:

CURRENT RATING: 4AMP MAX
VOLTAGE RATING: 250V

MECHANICAL:

TEMPERATURE RANGE: -20° TO 80°C
INGRESS PROTECTION: IP 67

AGENCY CERTIFICATIONS:

AGENCY: CSA PENDING

PART NUMBER REFERENCE:

MATERIAL NUMBER	ENGINEERING NUMBER	SHELL MATERIAL
1200700408	8R4L301	303 STAINLESS STEEL
1200700157	8R4L30	NICKEL PLATED BRASS

ADD MAT# TO TABLE EC NO: WNA2009-0313 DRWN: LHARTMAN 2008/10/27 CHKD: VOU 2008/11/07 APPR: JFMURPHY 2008/11/10	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE ----		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION					
				mm	INCH	DRAWN BY DATE LHARTMAN 2008/10/27		TITLE MICRO-CHANGE RECEPTACLE 4 POLE MA/FE FEED-THRU ----							
			4 PLACES	±----	±----	CHECKED BY DATE VOU 2008/10/27									
			3 PLACES	±----	±----	APPROVED BY DATE JFMURPHY 2008/10/27		MOLEX INCORPORATED							
			2 PLACES	±----	±----	MATERIAL NO. SEE TABLE					DOCUMENT NO. SD-120070-001		SHEET NO. 1 OF 1		
			1 PLACE	±----	±----	SIZE A					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			ANGULAR ±----°												
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												