



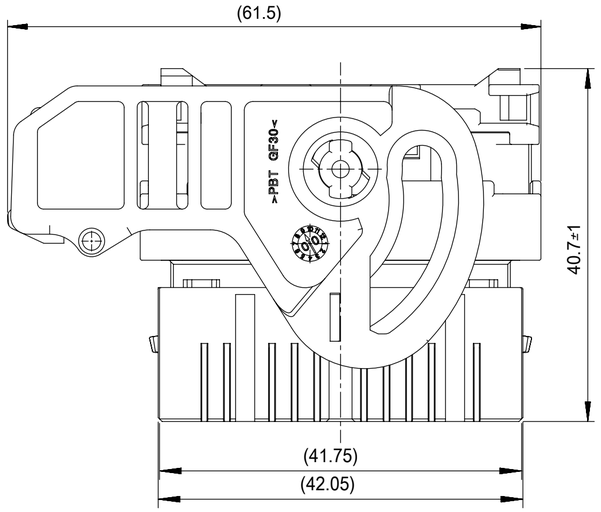


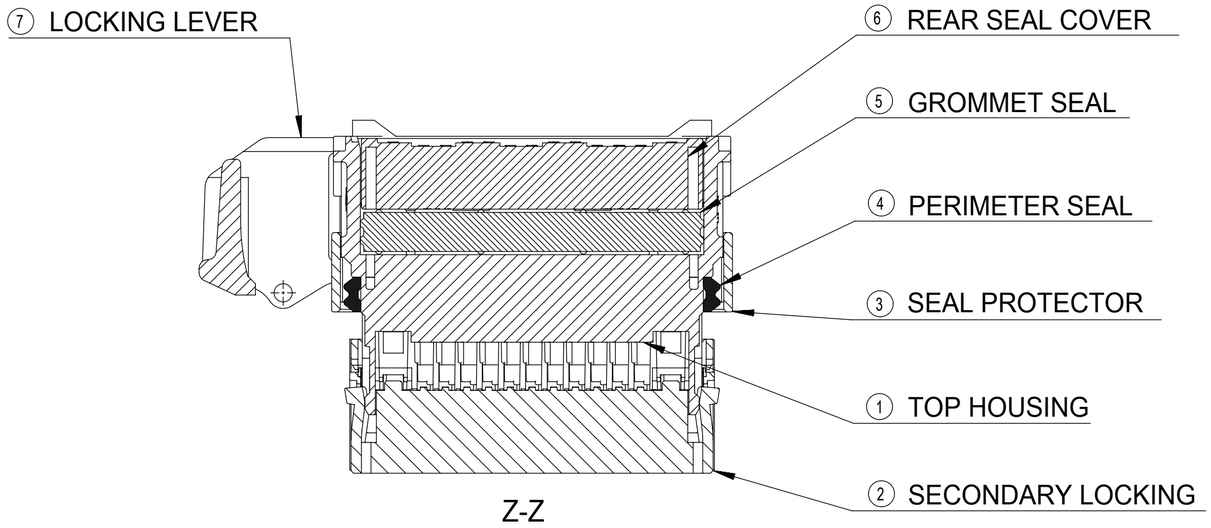

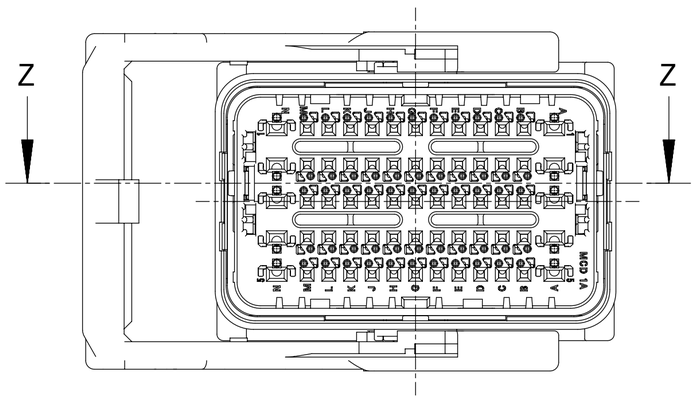

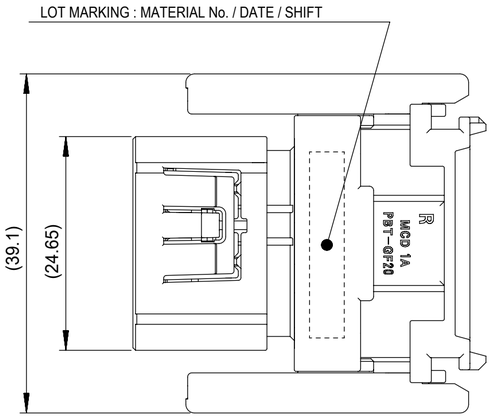

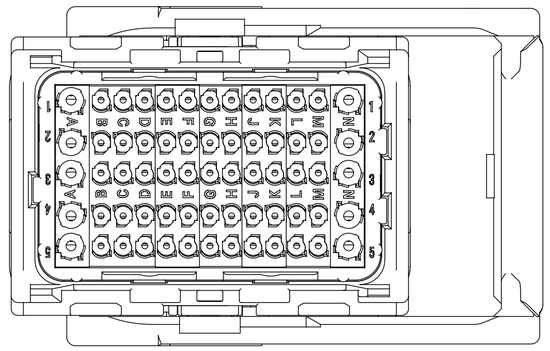

LEFT	34885-6522	BROWN	PRODUCTION
	34885-6512	BLACK	PRODUCTION
RIGHT	34885-6521	BROWN	PRODUCTION
	34885-6511	BLACK	PRODUCTION
WIRE OUTPUT(LEVER DIRECTION)	MATERIAL NO.	CODING	PRODUCT STATUS

PART NAME	MATERIAL	COLOR
① TOP HOUSING	PBT G.F.	BLACK
② SECONDARY LOCKING	PBT G.F.	BLACK / BROWN
③ SEAL PROTECTOR	PBT G.F.	BLACK
④ PERIMETER SEAL	SILICONE	BLUE
⑤ GROMMET SEAL	SILICONE	BLUE
⑥ REAR SEAL COVER	PBT G.F.	BLACK
⑦ LOCKING LEVER	PBT G.F.	BLACK

DOCUMENT STATUS	P1	RELEASE DATE	2019/10/07 05:37:10

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	mm
SCALE	2:1
GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL	±---°
4 PLACES	± ---
3 PLACES	± ---
2 PLACES	± ---
1 PLACE	± ---
0 PLACES	± ---
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC: REVISED

EC NO: 625053
DRWN: KNAGAI02 2019/10/02
CHK'D: SANDO 2019/10/04
APPR: TOSADA 2019/10/07

INITIAL REVISION:
DRWN: PBOSQUAIN 2015/05/20
APPR: OPLESSIS 2015/09/10

molex

CMX CONNECTOR
65WAY ASSY

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-34885-002	PSD	001	B


THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A2-SIZE	34885	SEE CHART	GENERAL MARKET	1 OF 2

FORMAT: 11x17_Landscape-Grid-A2
REVISION: 1.1
DATE: 2015/09/14

CODING


BLACK

34885-651*

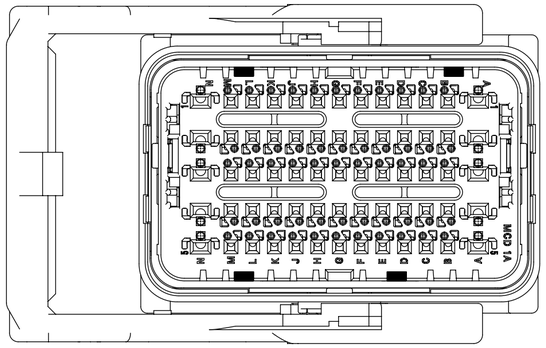


BROWN

34885-652*

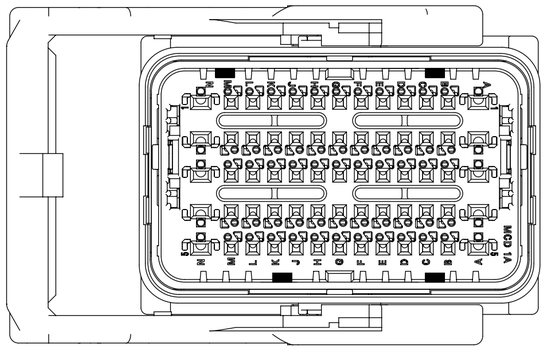


WIRE OUTPUT: RIGHT

34885-65*1

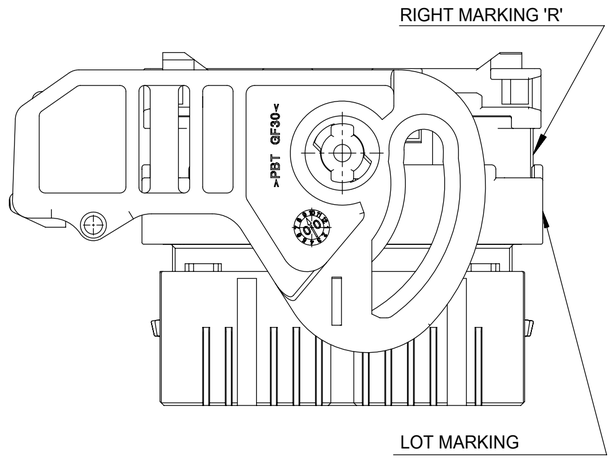

WIRE OUTPUT: LEFT

34885-65*2

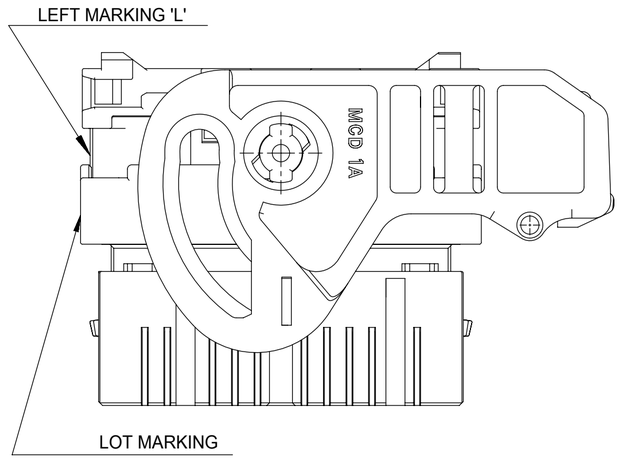

< APPLICABLE TERMINAL AND WIRE SIZE >

APPLICABLE TERMINAL	PART NO.	JASON WIRE SIZE		ISO WIRE SIZE	
		APPLICABLE WIRE SIZE	INSULATION DIAMETER (mm)	APPLICABLE WIRE SIZE	INSULATION DIAMETER (mm)
CTX64 TERMINAL	34803-3211	AVSS / CAVS 0.3sq	1.4 - 1.5	THIN WALL 0.35sq	1.25 - 1.4
	34803-3212	AVSS / CAVS 0.5 - 0.85sq	1.6 - 1.9	THIN WALL 0.5 - 0.75sq	1.4 - 1.9
CTX150 TERMINAL	34805-0112	AVSS / CAVS 0.85 - 1.25sq	1.8 - 2.2	THIN WALL 0.75 - 1sq	1.6 - 2.15
	34805-0113	AVSS / CAVS 1.25 - 2sq	2.1 - 2.7	THIN WALL 1.5 - 2sq	2.1 - 2.8

NOTES :

1 - BLACK CODING SHOWN

2 - APPLICABLE TERMINAL : SEE CHART

3 - APPLICABLE WIRE CAP : 502730-0001

4 - ELV AND RoHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	mm
SCALE	2:1
GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL	± ‒ ‒ ‒ °
4 PLACES	± ‒ ‒ ‒
3 PLACES	± ‒ ‒ ‒
2 PLACES	± ‒ ‒ ‒
1 PLACE	± ‒ ‒ ‒
0 PLACES	± ‒ ‒ ‒
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC: REVISED

EC NO: 625053

DRWN: KNAGAI02 2019/10/02

CHK'D: SANDO 2019/10/04

APPR: TOSADA 2019/10/07

INITIAL REVISION:

DRWN: PBOSQUAIN 2015/05/20

APPR: OPLESSIS 2015/09/10

THIRD ANGLE PROJECTION | DRAWING: A2-SIZE | SERIES: 34885

molex

CMX CONNECTOR
65WAY ASSY

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-34885-002	PSD	001	B

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE SHEET 1	GENERAL MARKET	2 OF 2

DOCUMENT STATUS	P1	RELEASE DATE	2019/10/07 05:37:10

FORMAT: 34885-001-Prod-A2
REVISION: 1
DATE: 2019/10/11