


About : cable information
 Version : 0.1
 File : For internal use only

Stainless steel probe assembly with SMT172 temperature sensor (part no: TA-SMT172-CS045-D07-CL0100S)

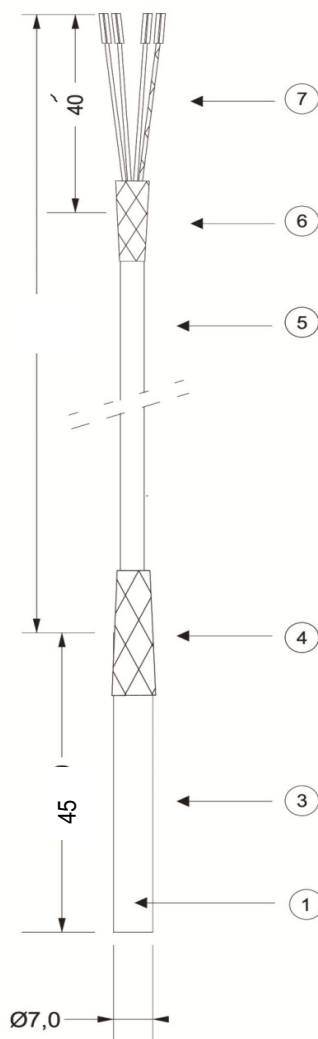

This probe is especially designed for use in combination with the Smartec SMT172 sensors. For specification of the sensor please look into the sensor specification as available on our website. Customised housing, cable material & length as well as connectors on request.

1	sensing element	SMT172-T018
3	probe tip	Ø7x45 mm (SS. 1.4305)
	sealing	Polyurethane resin
4	heat shrink	adhesive shrink sleeve
5	cable	3x0.22mm ² shielded, shield NOT connected to probe tip (Silicone); max temp 130°C
	cable length:	1000 mm other length on request
6	sleeve	polyolefin shrink sleeve
7	cable end	non-isolated splice (40mm)
	connection:	White out Brown Vcc Green GND
		Black(shrink) shield indication (inside tube a capacitor of 100 nF is mounted)

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Scan here and get an overview of personal contacts!



sensorsandpower.angst-pfister.com
