

SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax



RF Cable Assemblies Technical Data Sheet


PE3156-6

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female Bulkhead
- Cable Type: RG58

Features

- Max Frequency 5 GHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

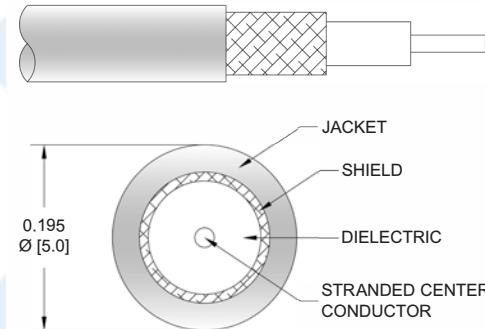

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3156-6 SMA male right angle to SMA female bulkhead 6 inch cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible RG58 coax. The PE3156-6 SMA male to SMA female cable assembly operates to 5 GHz. The right angle SMA interface on the RG58 cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax PE3156-6](#)



SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax

RF Cable Assemblies Technical Data Sheet

PE3156-6

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5	GHz
VSWR			1.5:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.01	0.1	1	5		GHz
Insertion Loss (Typ.)	0.307	0.324	0.4	0.599		dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

Mechanical Specifications

Cable Assembly

Length*	6 in [152.4 mm]
Weight	0.041 lbs [18.6 g]

Cable

Cable Type	RG58
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.195 in [4.95 mm]

One Time Minimum Bend Radius	0.98 in [24.89 mm]
Repeated Minimum Bend Radius	1.96 in [49.78 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax PE3156-6](#)



SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax

RF Cable Assemblies Technical Data Sheet

PE3156-6

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female Bulkhead
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in minimum	50 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum
Hex Size	5/16 inch	5/16 inch
Torque	3 in-lbs [0.34 Nm]	3 in-lbs [0.34 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax PE3156-6](#)




SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax

RF Cable Assemblies Technical Data Sheet

PE3156-6

How to Order

Part Number Configuration:

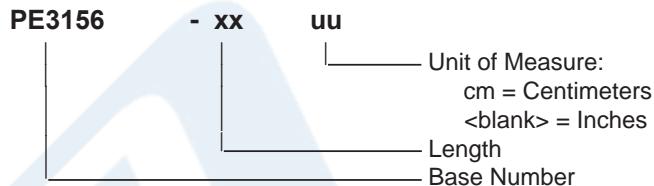

Example: PE3156-12 = 12 inches long cable
PE3156-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax PE3156-6](#)


URL: <https://www.pasternack.com/sma-male-sma-female-rg58cu-cable-assembly-pe3156-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3156-6 CAD Drawing

SMA Male Right Angle to SMA Female Bulkhead Cable 6 Inch Length Using RG58 Coax

REVISIONS				
REV.	DESCRIPTION	DATE	APPROVED	
A	INITIAL RELEASE	12/03/2020	SELLIS	

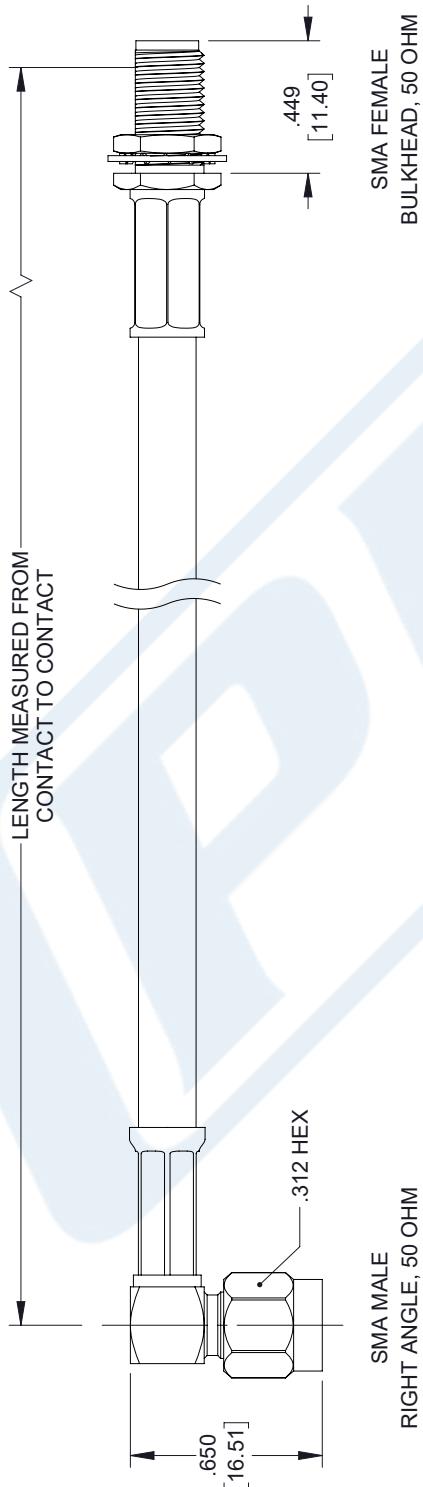

		THIRD ANGLE PROJECTION
<small>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERACK CORPORATION. ALL RIGHTS RESERVED.</small>		
<small>Pasterack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasterack.com E-mail: sales@pasterack.com</small>		
<small>SHEET 1 OF 1</small>		
SCALE	N/A	REV A
ITEM NO.	PE3156-XX	
SIZE	CAGE CODE	DRAWN BY
A	53919	DZINN

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS
TOLERANCES:

$X = \pm .2$	[.08]	FRACTIONS
$.XX = \pm .02$	[.51]	$\pm 1/32$
$XXX = \pm .005$	[.13]	ANGLES $\pm 1^\circ$
CABLE LENGTH (L) TOLERANCES:		
$L \leq 12$	[305]	$+1 [25] / -0$
$12 [305] < L \leq 60 [1524]$	$+2 [51] / -0$	
$60 [1524] < L \leq 120 [3048]$	$+4 [102] / -0$	
$120 [3048] < L \leq 300 [7620]$	$+6 [152] / -0$	
$300 [7620] < L$	$+8 [203] / -0$	

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION, CONTRARY TO U.S. LAW PROHIBITED.