
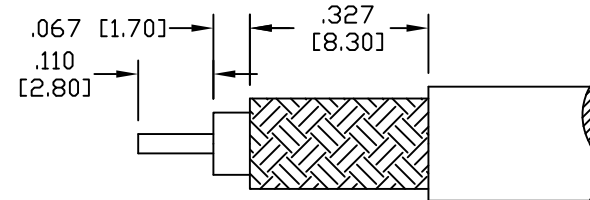
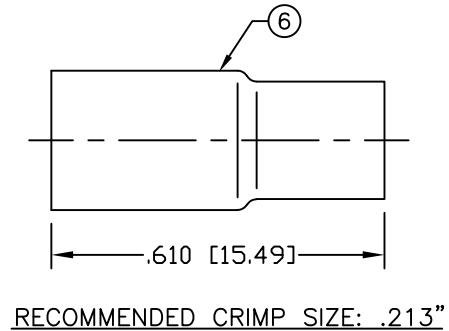



PART NO.		RSA-3000-7		
REV	DESCRIPTION	DWN	DATE	APPROVED
—	ENGINEERING RELEASE	CZS	11/04/21	JDMc

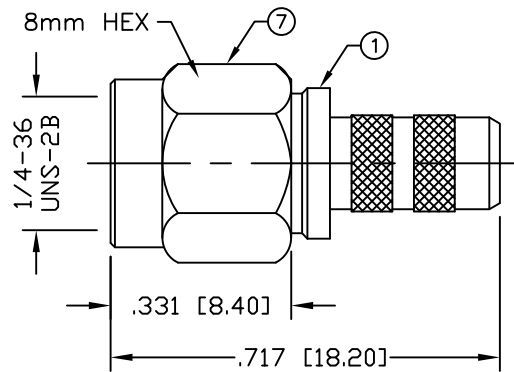

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0–12.4 GHz
 VSWR: 1.3 MAX.
 INSULATION RESISTANCE: 5000 MΩ MIN.
 TEMPERATURE RANGE: –65°C TO 85°C
 FOR MOTOROLA WHITE TEFLON, BELDEN 82907, 88240 & 89907,
 RG–122/U & TIMES MSI–15 CABLE

7	SHELL	1	BRASS	NICKEL
6	FERRULE	1	BRASS	NICKEL
5	RETAINING RING	1	Be.Cu.	NATURAL
4	GASKET	1	SILICONE	ORANGE
3	PIN	1	BRASS	GOLD
2	INSULATOR	1	PTFE	NATURAL
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUÑIGA	11/04/21
CHECKED	
ORJ DRAWN C. ZUÑIGA	11/04/21

RoHS COMPLIANT
PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.