



FEATURES

- High power,high energy density High reliability
- Long cycle life,maintenance-free
- 3.0V High Operating Voltage
- Ultra low ESR for high power density
- REACH,RoHS Directive Compliant

APPLICATIONS

- Consumer electronics,Smart meter, Back up power, Stand alone or augment existing,energy/power source.



OPERATING TEMPERATURE RANGE

- -40°C to +65°C @3.0V
- -40°C to +85°C @2.5V


GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +65°C
Capacitance range	0.22F to 600F
Rated voltage	3.0 V
Surge voltage	3.15V
Temperature characteristics	Capacitance change: Within ±30% of initial measured value at +25°C Internal resistance: Within ±200% of initial measured value at +25°C
High temperature load time	After 65°C 1000 hours : Capacitance change: ±30% of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within ±30 % of initial rated value Internal resistance: Within 2 times of initial specified value
Humidity characteristic	Relative humidity: 90%~95% /Duration of testing:240 hrs /Temperature:40±2°C Capacitance change: Within ±30 % of initial rated value Internal resistance: Within 2 times of initial specified value
Vibration resistance	Amplitude:1.5mm /Frequency:10~55Hz/X,Y,Z(2hrs) /Duration of testing:6 hrs Capacitance change: Within ±30 % of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.

PART NUMBER SYSTEM

<u>CXP</u>	<u>3R0</u>	<u>105</u>	<u>R</u>	<u>TW</u>	<u>*</u> _	<u>***</u> _
Series	Rated Voltage	Capacity Code	Environmental Code	MFG Code	Special Code	Custom Code


Casing Display:



DIMENSIONS




RADIAL LEAD TYPE

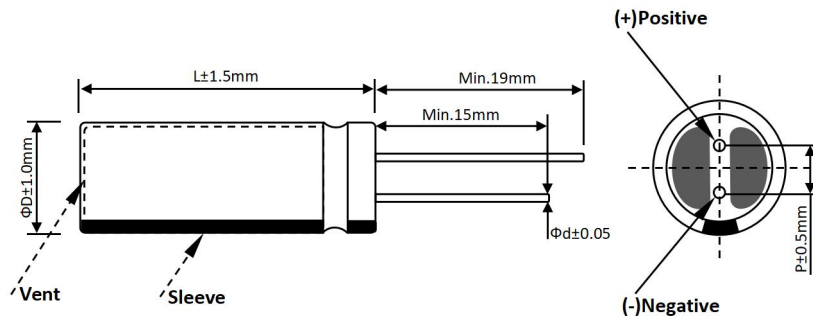


Size(mm)		
ΦD	P	Φd
4	1.5	0.5
5	2.0	0.5
6.3	2.5	0.6
8	3.5	0.6
10	5.0	0.6
12.5	5.0	0.6
16	7.5	0.8
18	7.5	0.8

RADIAL BENT LEAD TYPE

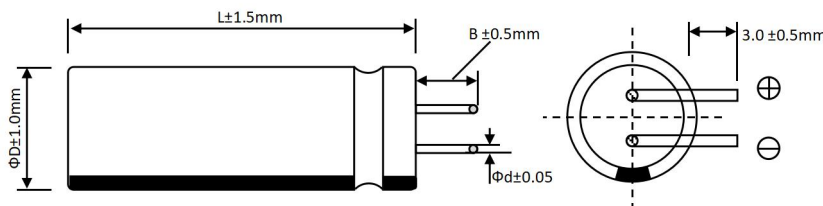


Style	B(mm)
A1	4.0
C1	2.0

SOLDER PIN TYPE 2-PIN PART TERMINAL S1 TYPE

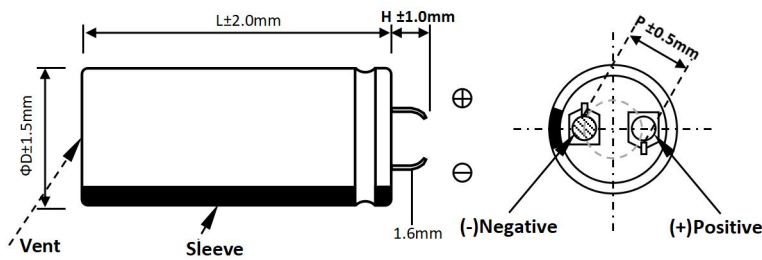


Size(mm)		
ΦD	P	H
22	10.0	7.0
25	10.0	7.0
30	10.0	7.0
35	10.0	7.0

SOLDER PIN TYPE 2-PIN PARTS TERMINAL Z2 TYPE

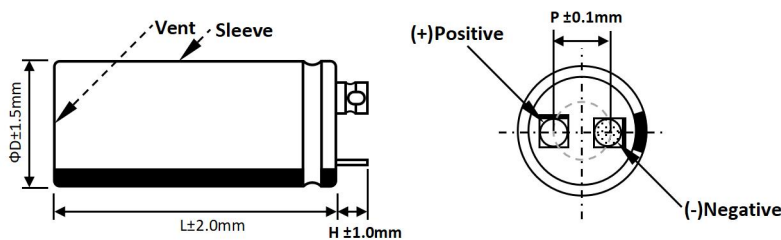

Size(mm)		
ΦD	P	H
22	10.0	7.0
25	10.0	7.0
30	10.0	7.0
35	14.0	8.5

SOLDER PIN TYPE 4-PIN PART TERMINAL S4 TYPE

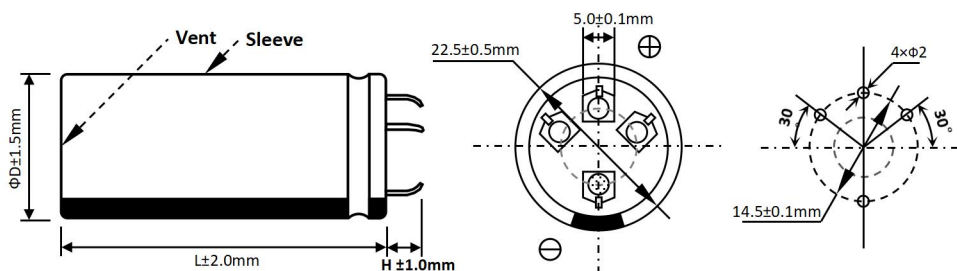




Size(mm)		
ΦD	P	H
35	22.5	7.0

STANDARD PRODUCTS



Part Number	Working Voltage (V DC)	Rated Cap. (F)	Capacitance Tolerance	Dimensions (mm)		Max.ESR		Maximum Leakage (72hrs/ma)	Maximum Peak Current(A)	Maximum Endurance Current(A)	Power Density (W/Kg)	Maximum Energy (W.h)	Energy Density (Wh/kg)
				D	L	ESRAC (1kHz/mΩ)	ESRDC (mΩ)						
Radial Lead(Miniaturized)													
CXP-3R0224R-TWX	3.0	0.22	-0%~+100%	4	10	1000	1820	0.001	0.19	0.09	1028	0.0002	0.71
CXP-3R0224R-TW	3.0	0.22	-0%~+100%	5	10	700	1200	0.002	0.36	0.10	1021	0.0002	0.87
CXP-3R0304R-TW	3.0	0.3	-0%~+100%	4	10	700	1200	0.001	0.25	0.10	1123	0.0003	0.79
CXP-3R0354R-TW	3.0	0.35	-0%~+100%	5	10	600	1000	0.002	0.40	0.12	1253	0.0004	1.05
CXP-3R0504R-TW	3.0	0.5	-0%~+100%	5	12	400	700	0.002	0.44	0.15	1330	0.0006	1.08
CXP-3R0604R-TW	3.0	0.6	-0%~+100%	4	22	700	1200	0.003	0.50	0.16	1350	0.0007	1.75
CXP-3R0105R-TWV	3.0	1	-0%~+100%	4	25	550	900	0.003	0.60	0.18	1263	0.0013	2.19
CXP-3R0105R-TWX	3.0	1	-0%~+100%	6.3	12	240	1500	0.006	0.60	0.29	1108	0.0013	1.92
CXP-3R0105R-TWQ	3.0	1	-0%~+100%	6.3	10	220	1300	0.003	0.66	0.18	1200	0.0013	1.67
CXP-3R0125R-TW	3.0	1.2	-0%~+100%	5	22	200	400	0.006	1.29	0.33	3085	0.0015	2.68
CXP-3R0125R-TWX	3.0	1.2	-0%~+100%	6.3	11	250	500	0.006	1.10	0.20	3085	0.0013	1.86
CXP-3R0355R-TW	3.0	3.5	-0%~+100%	6.3	22	90	130	0.010	2.71	0.53	4114	0.0041	3.93
CXP-3R0455R-TW	3.0	4.5	-0%~+100%	6.3	25	90	120	0.010	3.0	0.56	3512	0.0050	4.07
Radial Lead													
CXP-3R0105R-TW	3.0	1	-0%~+100%	8	12	180	860	0.006	1.21	0.47	1322	0.0013	1.32
CXP-3R0155R-TW	3.0	1.5	-0%~+100%	8	20	98	280	0.012	3.31	0.74	2660	0.0018	1.34
CXP-3R0205R-TWX	3.0	2	-0%~+100%	8	12	130	260	0.006	1.15	0.26	1483	0.0025	2.75
CXP-3R0205R-TW	3.0	2	-0%~+100%	8	16	100	360	0.010	2.21	0.61	2609	0.0025	2.17
CXP-3R0335R-TW	3.0	3.3	-0%~+100%	8	20	98	280	0.012	3.31	0.74	2660	0.0041	2.84
CXP-3R0405R-TW	3.0	4	-0%~+100%	10	20	75	113	0.018	4.20	0.90	4141	0.0063	2.47
CXP-3R0505R-TWX	3.0	5	-0%~+100%	8	25	90	135	0.015	4.48	0.87	4141	0.0063	3.23
CXP-3R0505R-TW	3.0	5	-0%~+100%	10	20	75	113	0.018	4.80	0.97	3794	0.0063	2.47
CXP-3R0605R-TW	3.0	6	-0%~+100%	10	20	70	170	0.020	4.79	0.79	4500	0.0075	2.50
CXP-3R0705R-TWX	3.0	7	-0%~+100%	8	25	80	160	0.018	3.94	0.71	2842	0.0088	4.61
CXP-3R0705R-TW	3.0	7	-0%~+100%	10	20	70	170	0.020	4.79	0.79	2118	0.0088	2.92
CXP-3R0705R-TWQ	3.0	7	-0%~+100%	10	25	60	150	0.024	6.44	1.20	2769	0.0088	3.37
CXP-3R0106R-TWX	3.0	10	-10%~+30%	10	25	55	83	0.030	8.22	1.25	4156	0.0125	3.97
CXP-3R0106R-TWQ	3.0	10	-10%~+30%	10	30	45	68	0.036	8.96	1.51	4417	0.0125	3.45
CXP-3R0106R-TW	3.0	10	-10%~+30%	12.5	20	45	68	0.036	8.96	1.42	4033	0.0125	3.15
CXP-3R0126R-TW	3.0	12	-10%~+30%	12.5	25	40	60	0.048	10.47	1.66	4288	0.0150	3.57
CXP-3R0156R-TWX	3.0	15	-10%~+30%	12.5	30	35	53	0.062	12.59	1.93	4209	0.0188	3.84
CXP-3R0156R-TW	3.0	15	-10%~+30%	12.5	25	30	45	0.048	13.43	1.92	5581	0.0188	4.36
CXP-3R0186R-TW	3.0	18	-10%~+30%	12.5	25	35	47	0.040	12.98	1.59	3829	0.0230	4.79
CXP-3R0206R-TW	3.0	20	-10%~+30%	12.5	25	35	47	0.050	13.64	1.66	3981	0.0250	3.91
CXP-3R0206R-TWQ	3.0	20	-10%~+30%	12.5	30	33	45	0.072	15.08	1.98	4195	0.0250	4.81
CXP-3R0226R-TW	3.0	22	-10%~+30%	12.5	35	34	48	0.060	14.50	1.97	3103	0.0275	4.58
CXP-3R0256R-TWQ	3.0	25	-10%~+30%	12.5	35	26	41	0.082	18.99	2.40	4858	0.0313	5.48
CXP-3R0256R-TW	3.0	25	-10%~+30%	16	25	25	38	0.082	19.35	2.41	3491	0.0313	3.79
CXP-3R0306R-TW	3.0	30	-10%~+30%	16	30	20	30	0.090	23.68	2.92	3930	0.0375	4.09
CXP-3R0346R-TW	3.0	34	-10%~+30%	12.5	45	20	45	0.080	21.93	2.79	2428	0.0425	6.75
CXP-3R0356R-TWX	3.0	35	-10%~+30%	16	30	20	40	0.070	21.88	3.09	3103	0.0438	5.03
CXP-3R0356R-TW	3.0	35	-10%~+30%	16	35	18	25	0.105	26.99	3.30	4310	0.0438	4.71
CXP-3R0406R-TW	3.0	40	-10%~+30%	12.5	46	20	45	0.080	23.68	3.01	3694	0.0500	6.76
CXP-3R0506R-TWQ	3.0	50	-10%~+30%	12.5	50	18	35	0.105	28.72	3.40	3640	0.0625	7.02
CXP-3R0506R-TW	3.0	50	-10%~+30%	18	40	18	20	0.075	37.50	3.96	4154	0.0625	4.81
CXP-3R0606R-TW	3.0	60	-10%~+30%	18	60	15	20	0.100	40.90	2.00	4000	0.0750	5.56
CXP-3R0107R-TWV	3.0	100	-10%~+30%	18	60	13	20	0.260	50.85	5.30	2523	0.1250	5.69
CXP-3R0127R-TWV	3.0	120	-10%~+30%	18	60	12	15	0.300	61.45	6.72	2688	0.1370	6.20
SOLDER PIN TYPE 2-PIN													
CXP-3R0107R-TW	3.0	100	-10%~+30%	22	45	8.0	11.2	0.276	70.75	6.84	4231	0.1250	5.48
CXP-3R0127R-TW	3.0	120	-10%~+30%	22	50	7.5	10.5	0.345	79.65	7.40	3594	0.1500	5.24
CXP-3R0157R-TWX	3.0	150	-10%~+30%	22	55	7.0	9.8	0.460	93.40	7.00	3800	0.2000	7.00
CXP-3R0167R-TW	3.0	160	-10%~+30%	22	55	7.0	9.5	0.460	94.20	8.00	3800	0.2100	7.00
CXP-3R0157R-TW	3.0	150	-10%~+30%	25	50	7.0	9.8	0.460	91.09	8.22	3150	0.1875	5.36
CXP-3R0227R-TW	3.0	220	-10%~+30%	30	50	6.0	8.4	0.598	115.87	9.83	2726	0.2750	5.83
CXP-3R0257R-TW	3.0	250	-10%~+30%	30	55	5.5	7.7	0.667	128.21	10.71	2877	0.3125	6.41
SOLDER PIN TYPE 2-PIN / SOLDER PIN TYPE 4-PIN													
CXP-3R0357R-TW	3.0	350	-10%~+30%	35	60	3	3.5	1.00	235.90	13.90	2657	0.4300	6.83
CXP-3R0367R-TW	3.0	360	-10%~+30%	35	60	4.0	5.4	0.98	183.42	14.49	2657	0.4500	5.98
CXP-3R0387R-TW	3.0	380	-10%~+30%	35	60	3.8	5.1	1.05	193.26	14.86	2751	0.4750	6.21
CXP-3R0407R-TW	3.0	400	-10%~+30%	35	66	3.5	4.7	1.15	207.61	16.15	2537	0.5000	5.55
CXP-3R0437R-TW	3.0	430	-10%~+30%	35	66	3.2	4.5	1.24	223.14	16.55	2505	0.5625	5.87
CXP-3R0487R-TW	3.0	480	-10%~+30%	35	70	3.1	4.4	1.35	234.30	17.17	2405	0.6050	6.13
CXP-3R0507R-TW	3.0	500	-10%~+30%	35	65	2.9	3.4	1.30	277.70	18.75	2405	0.6250	7.81
CXP-3R0607R-TW	3.0	600	-10%~+30%	35	70	3	3.5	1.50	290.30	19.95	3760	0.7500	9.14

* operating temperature can be extended to 85°C with appropriate voltage

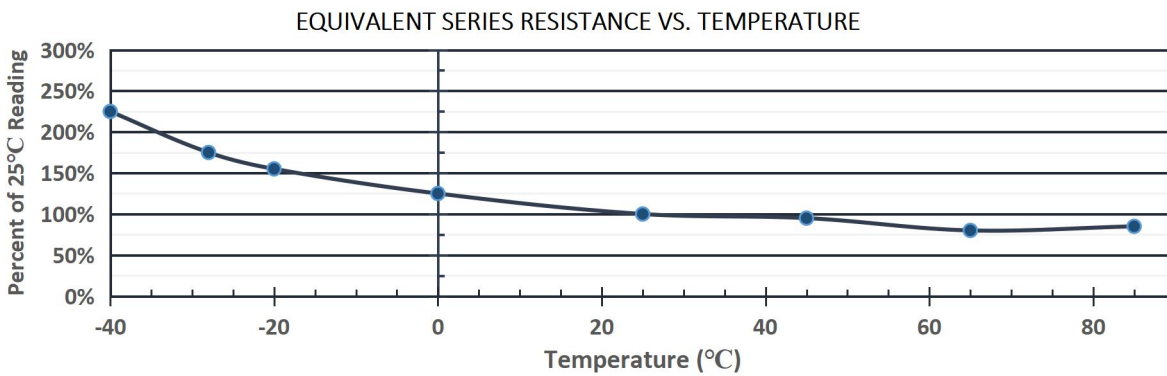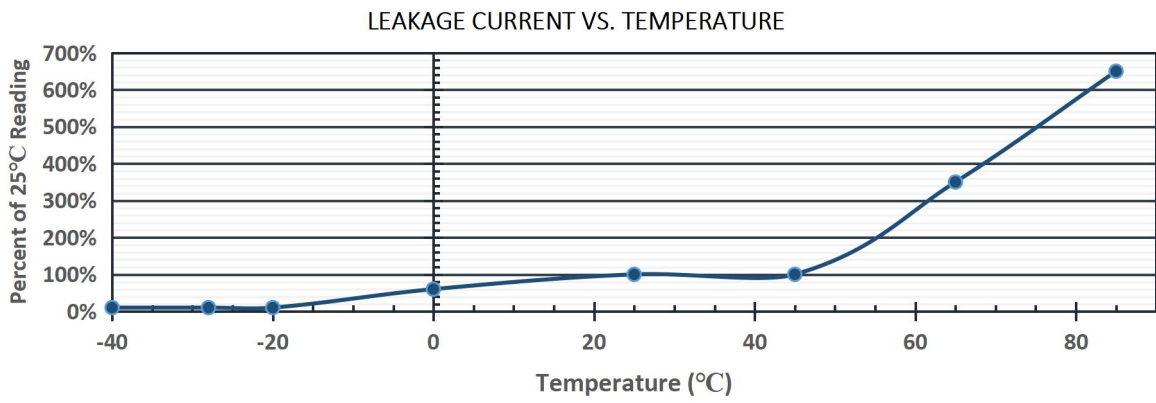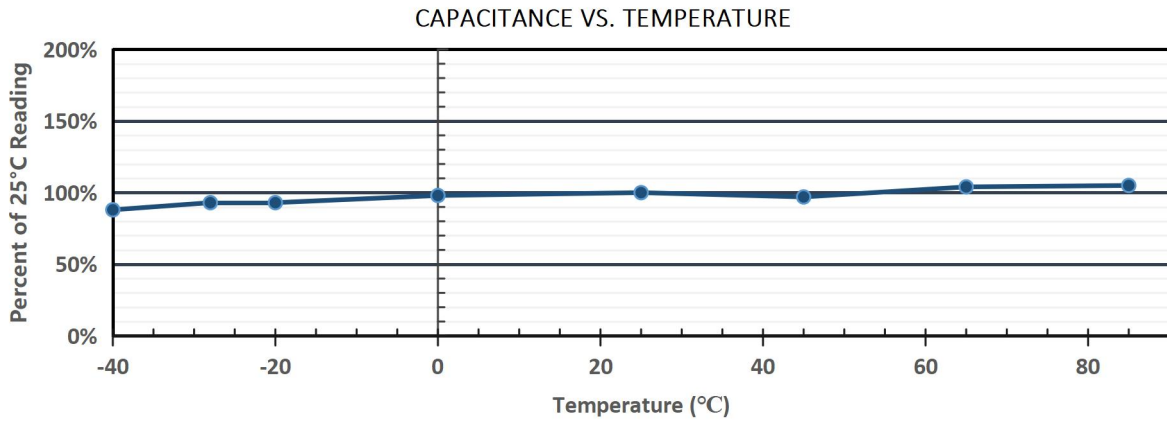



LIFE TIME AND TEMPERATURE PERFORMANCE

The life of a Super Capacitor is impacted by a combination of operating voltage and the operating temperature according to the following equation :

$$L = L_0 \times 3.25^{\frac{T_0 - T}{10}} \times 1.52^{\frac{V_0 - V}{0.1}}$$

L : is the theoretical lifetime at T temperature;


L₀ : is the working life of the highest rated working temperature;

T : is the actual working temperature;

T₀ : is the highest rated working temperature;

V : is the actual working voltage;

V₀ : is the highest rated working voltage.

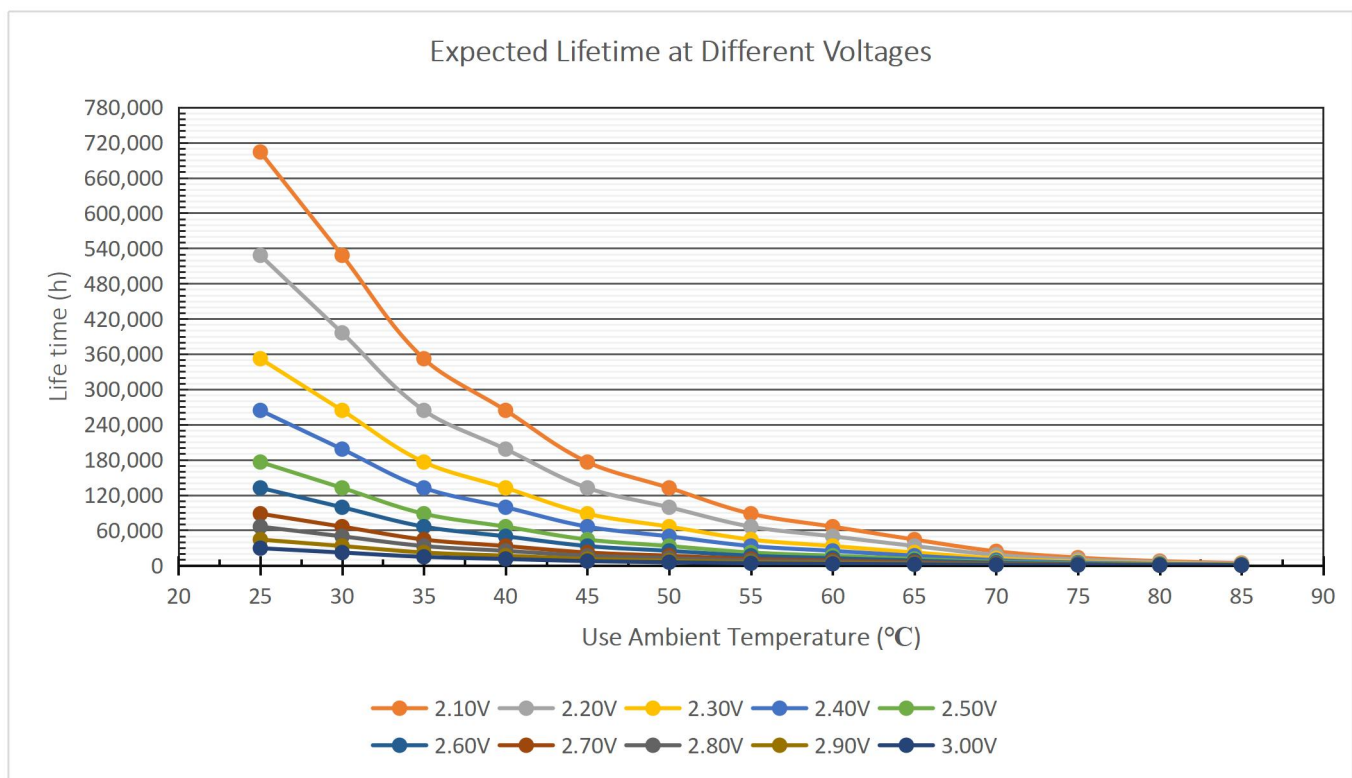

*Note : Estimated lifespan: The estimated lifespan under different operating voltages and operating temperatures in a theoretical environment. For the actual service life, please contact us to discuss the working conditions.



SAFETY RECOMMENDATIONS

WARNINGS

- To Avoid Short Circuit, after usage or test, SuperCapacitors voltage needs to discharge to $\leq 0.1V$.
- Do not Apply Over-voltage, Reverse Charge, Burn or Heat Higher than $150^{\circ}C$, explosion-proof valve may break open.
- Do not Press, Damage or disassemble the SuperCapacitor, housing could heat to high temperature causing Burns.
- If you observe Overheating or Burning Smell from the capacitor disconnect Power immediately, and do not touch.

PRECAUTIONS FOR WELDING

When soldering supercapacitors to a PCB, the temperature & time that the body of the supercapacitor sees during soldering can have a negative effect on performance. We advise following these guidelines:

- Do not immerse the supercapacitors in solder. Only the leads should come in contact with the solder.
- Ensure that the body of the supercapacitor is never in contact with the molten solder, the PCB or other components during soldering.
- Excessive temperatures or excessive temperature cycling during soldering may cause the safety vent to burst or the case to shrink or crack, potentially damaging the PCB or other components, and significantly reduce the life of the capacitor.

HAND SOLDERING

Keep distance between the supercapacitor body and the tip of the soldering iron and the tip should never touch the body of the capacitor. Contact between supercapacitor body and soldering iron will cause extensive damage to the supercapacitor, and change its electrical properties. It is recommended that the soldering iron temperature should be less than $350^{\circ}C$, and contact time should be limited to less than 4 seconds. Too much exposure to terminal heat during soldering can cause heat to transfer to the body of the supercapacitor, potentially damaging the electrical properties of the supercapacitor.

REGULATORY

- MSDS
- RoHS Compliant
- Reach Compliant

TRANSPORTATION

Not subjected to US DOT or IATA regulations
 UN3499, <10Wh, Non-Hazardous Goods
 International shipping description –
 “Electronic Products – Capacitor”

WAVE SOLDERING

Only use wave soldering on Radial type supercapacitors. The PCB should be preheated only from the bottom and for less than 60 seconds, with temperature at, or below, $100^{\circ}C$ on the top side of the board for PCBs equal to or greater than 0.8 mm thick.

Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
220	7	9
240	7	9
250	5	7
260	3	5

REFLOW SOLDERING

Infrared or conveyor over reflow techniques can be used on these supercapacitors. Do not use a traditional reflow oven without clear rated reflow temperature for supercapacitors.