

**Ratings**

Voltage: 300 V  
 Temperature: -25 ~ 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 4  
 Gauge: 16 AWG 1.31 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm x 65  
 Resistance at 20 °C: 14.6 Ω /km max

**Insulator**

Material: PVC  
 Color: white, black, red, green  
 Diameter: Ø 2.25 ±0.20 mm  
 Nominal thickness: 0.36 mm  
 Resistance at 20 °C: 10 MΩ /km min



**Outer jacket**


Material: PVC, 80 A  
 Color: black  
 Diameter: Ø 7.4 ±0.30 mm  
 Nominal thickness: 0.85 mm

**Wire marking:** E339579 UL AWM STYLE 2464 16 AWG 80°C  
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ±2 °C for 7 days:  
     Minimum tensile strength 70 % original  
     Minimum elongation 65 % original  
 Heat shock: 121 ±1 °C /1 hour, no observed degradation  
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %  
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

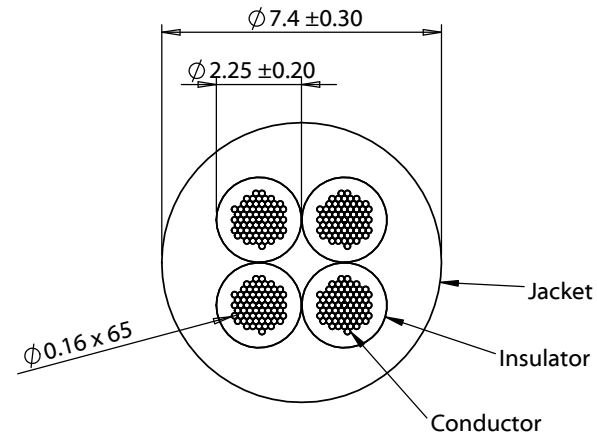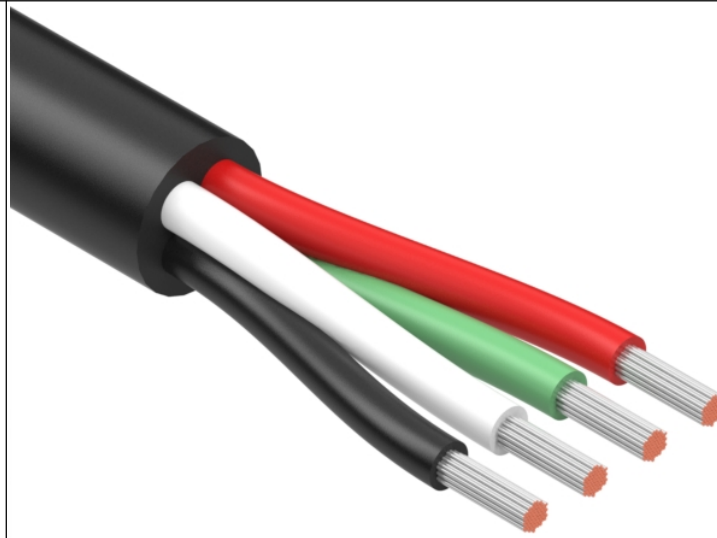

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118                  fax 1.541.323.4202 web tensility.com</p>
A	10/27/2023	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, 4C TS, 16 AWG, UL2464, 300V, 80C, 7.4 mm, VW-1, PVC	A 30-03357
				Scale: 5:1	 Sheet 1 of 1

5

4

3

2

1