



Accurate Kinetic Energy
No.11-3 Jianguo Rd., Tanzi Dist., 42760 Taiwan

All dimensions are millimeters.

CAD: TCR

Review: EG

Appr: JL

Page: 1/4 Date: August 01,2022

Specification Title:

**Clock Oscillator
Automotive Grade
3.2 x 2.5 millimeter Surface Mount
General Product Specification**

**AEC-Q200 Qualified
IATF 16949 Certified**

Part Number:

S3 Auto Series

Electrical Specifications:


Frequency Range	2.000~54.000	2.000~54.000	2.000~54.000	2.000~54.000	MHz	
Frequency Stability	±25 ~ ±100				ppm	
Aging per Year	±3				ppm Max.	
Operating Temperature Range	Standard	-40 ~ +85			°C	
	Option	-40 ~ +105				
	Option	-40 ~ +125				
Storage Temperature Range	-55 ~ +150					
Supply Voltage	1.8 ± 5%	2.5 ± 5%	3.3 ± 10%	1.62 ~ 3.63	VDD	
Input Current	2.000 to 9.999MHz	5	6	7	mA Max.	
	10.000 to 19.999MHz	6	7	7		
	20.000 to 31.999MHz	6	8	12		12
	32.000 to 54.000MHz	15	20	20		20
Output Voltage	Logic High (Voh)	90%			VDD Min.	
	Logic Low (Vol)	10%			VDD Max.	
Output Symmetry (Duty Cycle)	Standard	40 ~ 60 (at 50% VDD)			%	
	Tight	45 ~ 55 (at 50% VDD)				
Output Level	CMOS					
Output Load	15				pF Max.	
Rise and Fall Time	2.000 to 9.999MHz	7	5	5	ns Max.	
	10.000 to 19.999MHz	7	5	5		7
	20.000 to 31.999MHz	6	5	5		6
	32.000 to 54.000MHz	6	5	5		6
Phase Jitter (12 KHz to 20 MHz)	1				ps Max. RMS	
Enable-Disable Function	Tri-State					
Start Up Time	10				ms Max.	

Temperature stability is Inclusive of all conditions:

Calibration Tolerance at +25°C, frequency stability over the operating temperature range, supply voltage change, output load change, shock, vilbration, and 1st year aging at +25°C.

RoHS Compliant Pb - Lead Free AEC-Q200 Qualified IATF 16949 Certified	Ltr	Revisions	Date	Appr

Mechanical Outline and Solder Pad Layout:

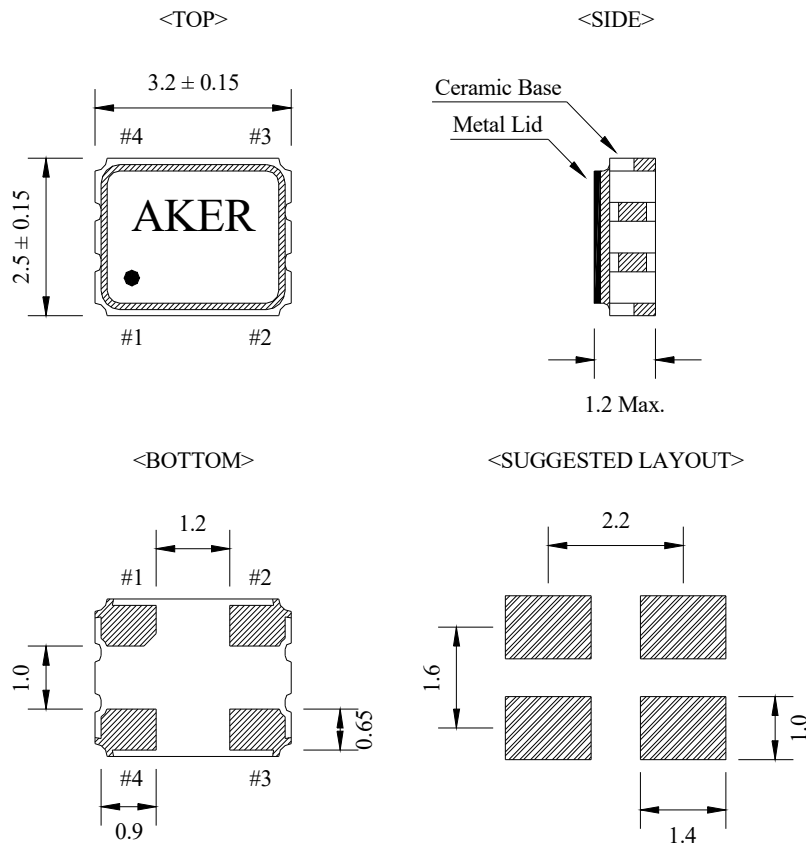

Pin Connection	
PIN No.	Connection
#1	Enable/Disable
#2	GND
#3	Output
#4	VDD


Enable/Disable Function	
PIN #1	PIN #3
HIGH or OPEN	Operating
LOW	High Impedance

Package is Seam Sealed Ceramic-Metal.

Terminator Pads are Ni/Au.


Dimensions are millimeters.

Carrier Tape Dimensions:

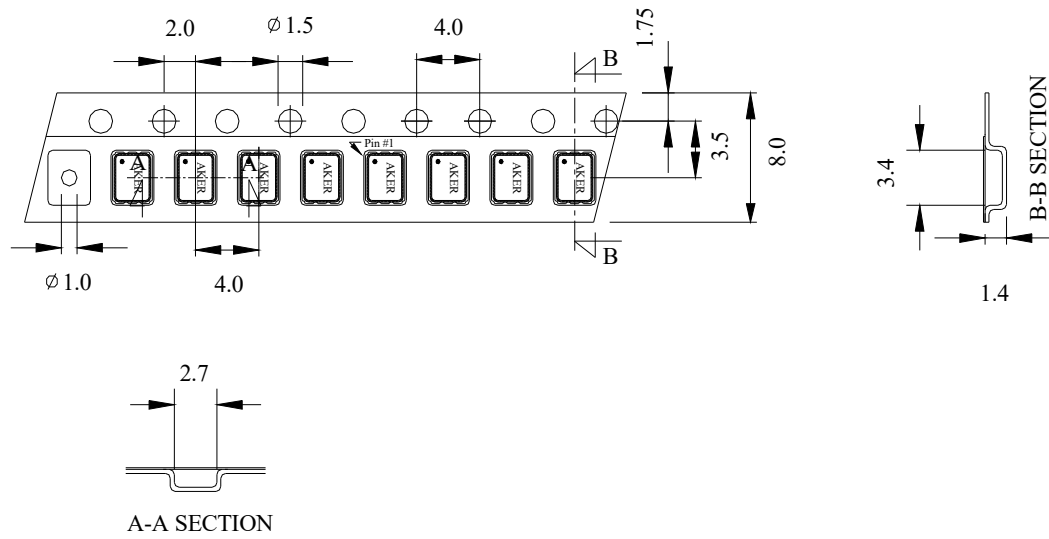

Dimensions are millimeters.

Solder Reflow Characteristics:

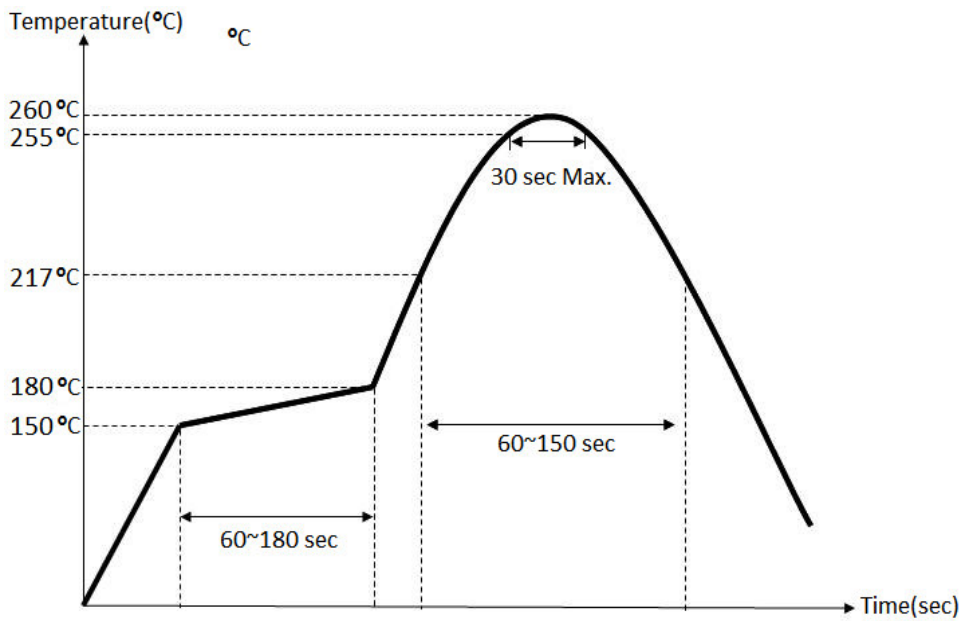

How to build a Part Number:

Series	S	Parameter
Package	3	3.2 x 2.5 mm
Supply Voltage	33	+3.3 VDD \pm 10%
	25	+2.5 VDD \pm 5%
	18	+1.8 VDD \pm 5%
	M	+1.62 ~ +3.63 VDD
Temperature Stability	10	\pm 100 ppm
	05	\pm 50 ppm
	03	\pm 30 ppm
	025	\pm 25 ppm
Duty Cycle	See Notes	40%~60%
	T	45%~55%
		-
Frequency	2.000~54.000	MHz
		-
AECQ-200	A	Automotive
		-
Temperature Range	X	-40 ~ +85 °C
	X1	-40 ~ +125 °C
	X2	-40 ~ +105 °C
		-
Packaging	M	250pcs Reel
	R	1000pcs Reel
	R3	3000pcs Reel

Part Number Example:

S33305T-50.000-A-X-R

S3: 3.2 x 2.5 mm SMD Package

33: +3.3 \pm 10% VDD Supply Voltage

05: \pm 50 ppm Temperature Stability

T: 45%~55% Tight Symmetry

50.000 MHz Nominal Frequency

A: Automotive Grade

X: -40 ~ + 85°C Temperature Range

R: Tape and Reel Packaging - 1000pcs Reel

Notes:

- 1- Standard Duty Cycle and Temperature Range do not need to be included in Part Number description.
- 2- Product is shipped in Tape and Reel configuration.
- 3- Quantities less than 250pcs are shipped in tape only.
- 4- Specification subject to change without notice.