

LED3BLU

FEATURES

- 3mm Round
- General Purpose Lead
- Highly Reliable

	Chip	Colloid
Material	InGaAlP	Epoxy
Color	Blue	Clear / Transparent

Note: All the LEDs are Clear/Transparent body before power on. So, before power on, no matter which color, all look the same (all are clear/transparent).


ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Parameter	Symbol	Value	Unit
Max Power Dissipation	P _M	85	mW
Max Continuous Forward Current	I _{FM}	20	mA
Max Reverse Voltage	V _{RM}	5	V
Peak Forward Current	I _{FP}	30	mA
Lead Soldering Temperature / Time	T _{SOL}	260 / ≤3S	°C/S
Operating Temperature Range	T _{OPR}	-25 ~ +80	°C
Storage Temperature Range	T _{STG}	-40 ~ +80	°C

INITIAL ELECTRICAL OPTICAL CHARACTERISTICS

Parameter	Symbol	MIN	TYP	MAX	UNIT	Conditions
Luminous Intensity	I _V	2500	3500	4000	mcd	I _F =20mA
Viewing Angle	2∅1/2	/	30	/	deg	I _F =20mA
Peak Wave Length	λ _P	/	/	/	nm	I _F =20mA
Dominant Wave Length	λ _d	460	465	470	nm	I _F =20mA
Spectral Width at half height	Δλ	/	30	/	nm	I _F =20mA
Forward Voltage	V _F	3.0	3.2	3.4	V	I _F =20mA
Reverse Current	I _R	/	/	≤20	μA	VR=5V

SHAPE AND SIZE

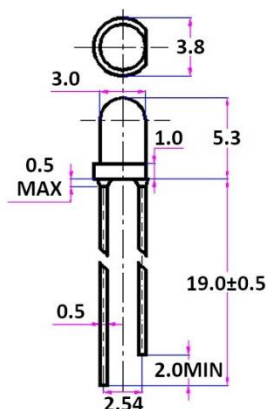

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.