

SUNON

SPECIFICATION FOR APPROVAL

CUSTOMER : 華碩N551_FAN

MOTOR TYPE : 

DESCRIPTION : M Lev Motor Fan

DIMENSIONS : 122.35X87.9X16 mm

MODEL : MF75090V1-C330-S9A

SUNON SPEC. NO. : D07018780F-01

CUSTOMER APPROVAL NO. :


APPROVED BY CUSTOMER :

(AUTHORIZED)

DRAWN	Qian 07/04	CHECKED	Amy	APPROVED	Cloud	SPEC.NO	D07018780F-01
						I SUE DATE	06. 27. 2014
						EDITION	1
						REVI ION DA E	07. 04. 2014
						E.SPEC	E11400193

建準電機工業股份有限公司
SUNONWEALTH ELECTRIC MACHINE INDUS RY CO., LTD.
NO. 30, LN. 296, XINYA RD., QIANZHEN DIST., TEL:886-7-8135888
KAOHSIUNG CITY 80673, TAIWAN (R.O.C) FAX:886-7-8230505/8230606/8231010
URL:http://www.SUNON.com E-mail: SUNON@email.SUNON.com.tw

I. MODEL NUMBERING SYSTEM

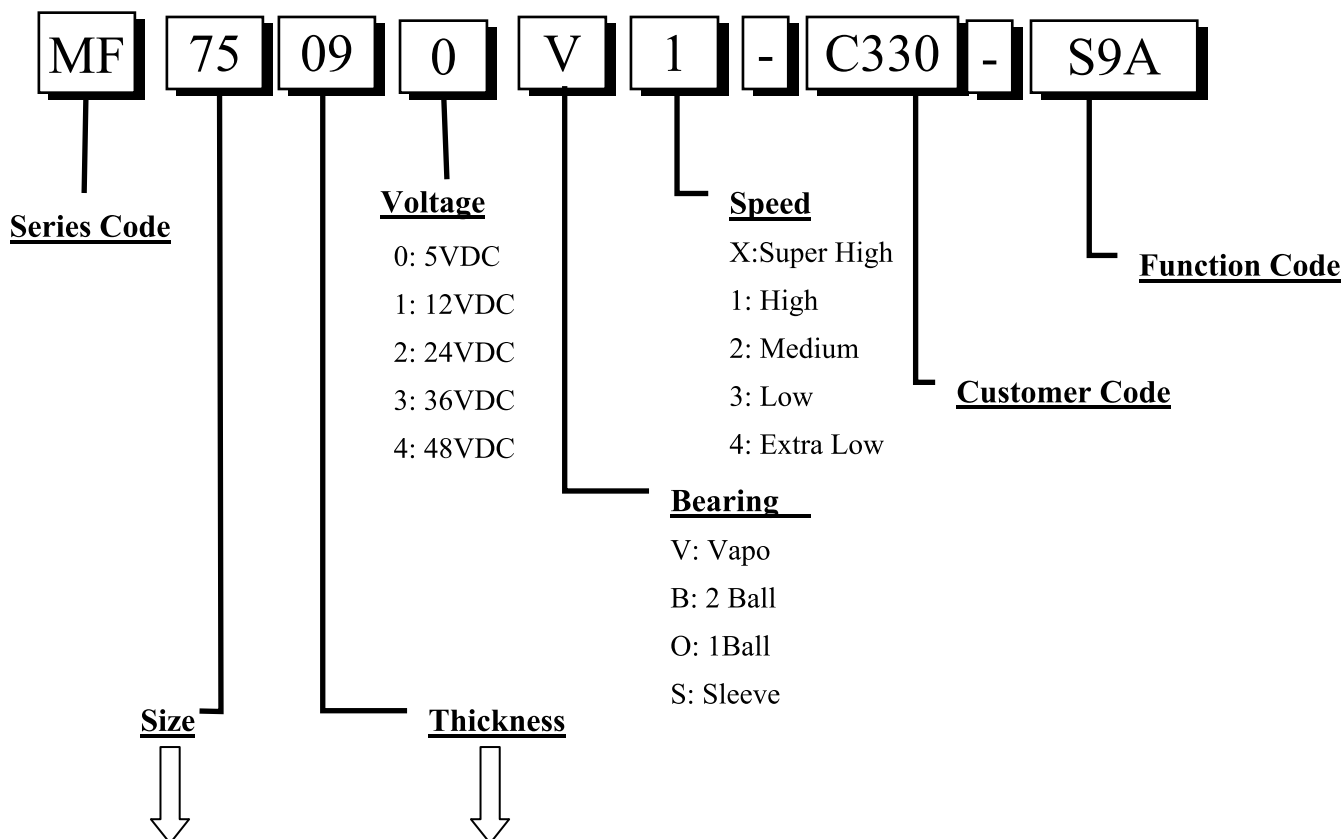

編碼	尺寸(mm)	編碼	尺寸(mm)	編碼	尺寸(mm)	編碼	尺寸(mm)
01~09	01~09	A0~A9	100~109	K0~K9	200~209	V0~V9	300~309
10~19	10~19	B0~B9	110~119	L0~L9	210~219	W0~W9	310~319
20~29	20~29	C0~C9	120~129	M0~M9	220~229	X0~X9	320~329
30~39	30~39	D0~D9	130~139	N0~N9	230~239	Y0~Y9	330~339
40~49	40~49	E0~E9	140~149	P0~P9	240~249	Z0~Z9	340~349
50~59	50~59	F0~F9	150~159	Q0~Q9	250~259		
60~69	60~69	G0~G9	160~169	R0~R9	260~269		
70~79	70~79	H0~H9	170~179	S0~S9	270~279		
80~89	80~89	I0~I9	180~189	T0~T9	280~289		
90~99	90~99	J0~J9	190~199	U0~U9	290~299		

II. SPECIFICATION

1. MECHANICAL CHARACTERISTIC

MOTOR DESIGN	Single phase, 4-poles Brushless DC motor
BEARING SYSTEM	Vapo bearing system
DIMENSIONS	See Page 6
MATERIALS OF COVER	SECC
MATERIALS OF HOUSING	SECC+Thermoplastic PPE of UL 94V-0
MATERIALS OF FAN BLADE	Thermoplastic PBT of UL 94V-0
DIRECTION OF ROTATION	Counter-clockwise viewed from front of fan blade
MOUNTING HOLES	Diameter 2.3 mm in 3 holes
WEIGHT	59 g

2. ELECTRIC CHARACTERISTIC

RATED VOLTAGE	5 VDC
OPERATING CURRENT	450 mA
OPERATING POWER CONSUMPTION	2.25 WATTS
OPERATING VOLTAGE RANGE	2.5~5 VDC
STARTING VOLTAGE	2.5 VDC
OPERATING TEMPERATURE RANGE	-10 to + 70 deg. C
STORAGE TEMPERATURE RANGE	-40 to + 70 deg. C



3. PERFORMANCE CHARACTERISTIC


RATED SPEED	2900 RPM ± 7% at rated voltage
AIR FLOW	9.9 CFM / Min. 8.3 CFM
STATIC PRESSURE	0.48 Inch-H₂O
ACOUSTIC NOISE	40.0 dB(A)
AIR FLOW V.S. PRESSURE	See Page 5
INSULATION CLASS	UL Class A
INSULATION RESISTANCE PLASTIC HOUSING	10M ohm at 500 VDC between internal stator and lead wire (+)
DIELECTRIC STRENGTH	Applied AC 500 V for one minute or AC 600 V for 2 Seconds between housing and lead wire (+)
LIFE EXPECTANCY	60,000 Hours at 40 deg. C, 65% humidity, 90% CL.
PROTECTION	<input checked="" type="checkbox"/> Automatic Restart Note: In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning off the electrical power to the motor. The fan will automatically restart when the locked rotor condition is released.
	<input type="checkbox"/> Polarity Protection

4. SAFETY


SAFETY	UL	CUR	TUV	CE
NO.	E77551	E77551	✓	✓

MODEL :MF75090V1-C330-S9A

PERFORMANCE CURVES

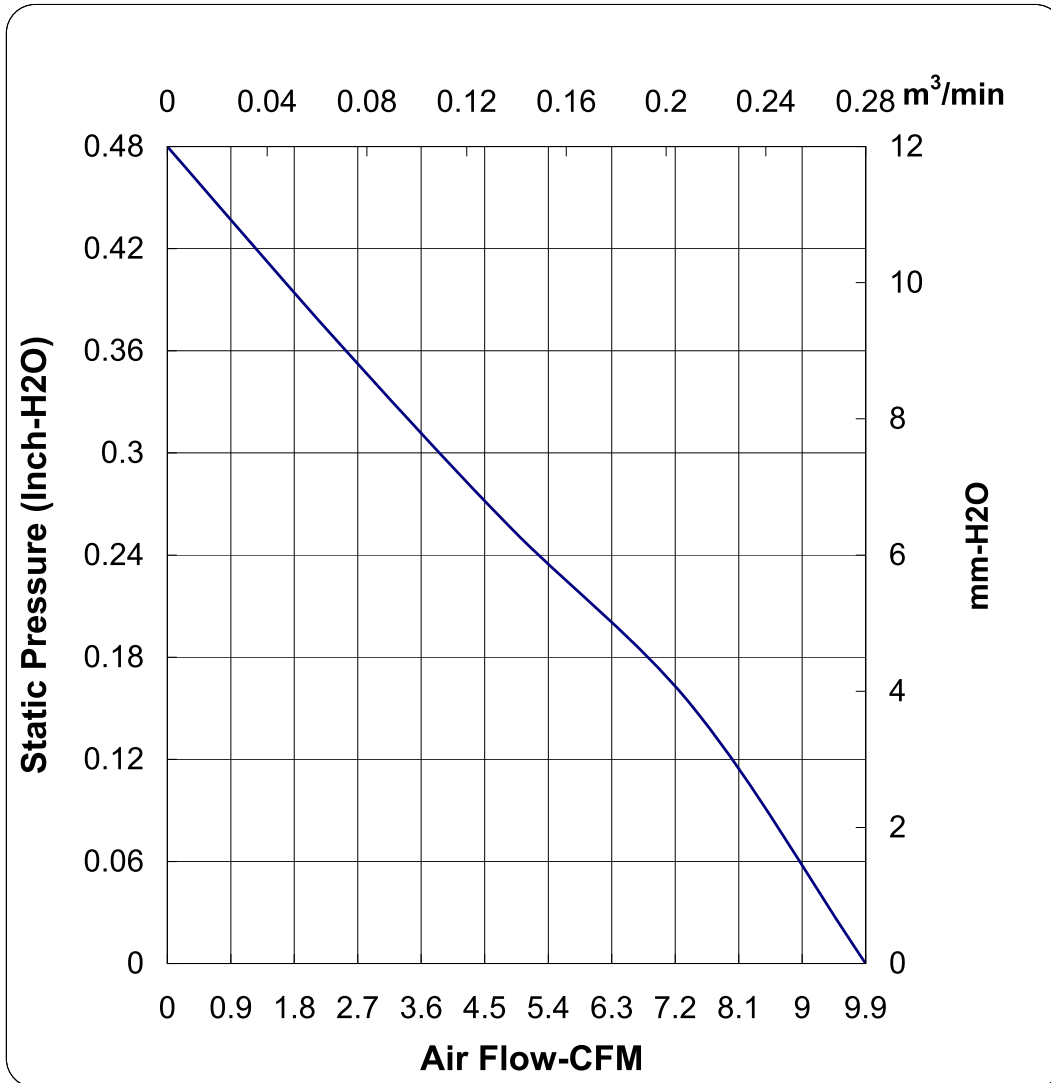

DIMENSIONS

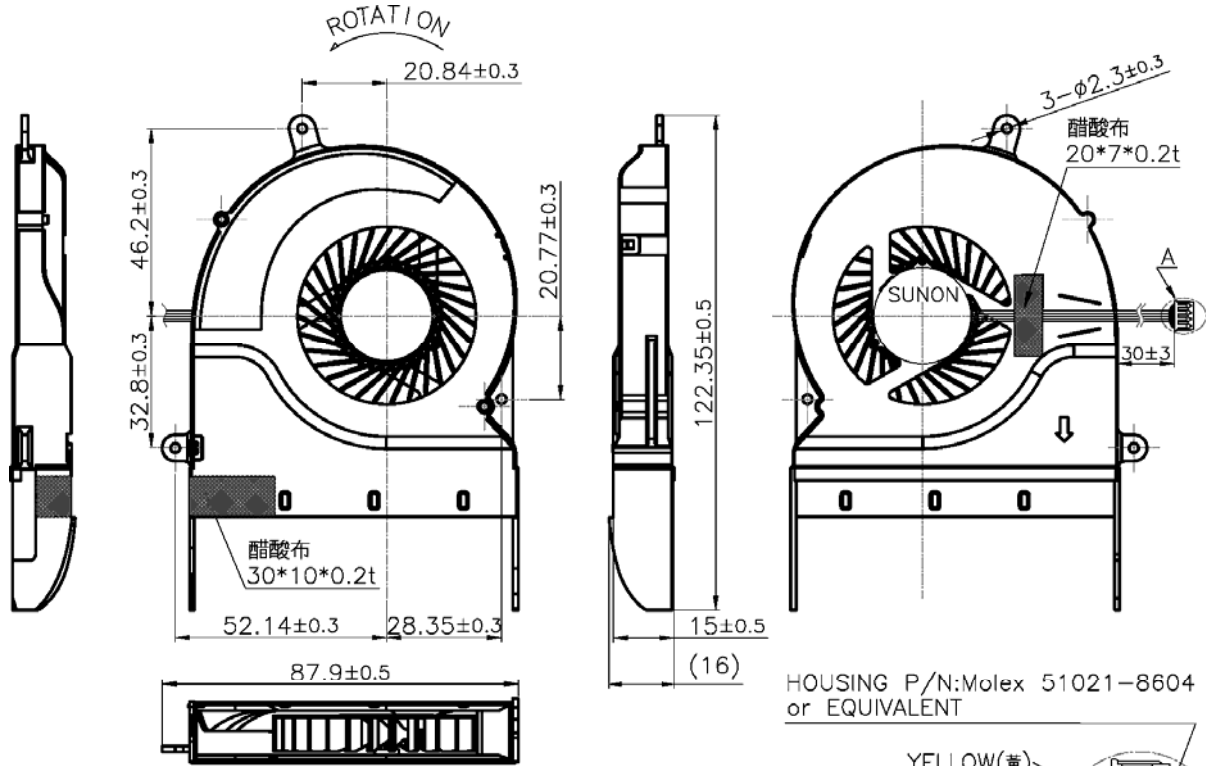

HOUSING P/N: Molex 51021-8604 or EQUIVALENT


YELLOW(黃)
BLACK(黑)
BLUE(藍)
RED(紅)

UL3302 #28AWG OD=0.88mm
+:RED(紅), -:BLACK(黑)
3rd Wire:YELLOW(黃)
4th PWM:BLUE(藍)

DETAIL A

UNIT: mm

LABEL

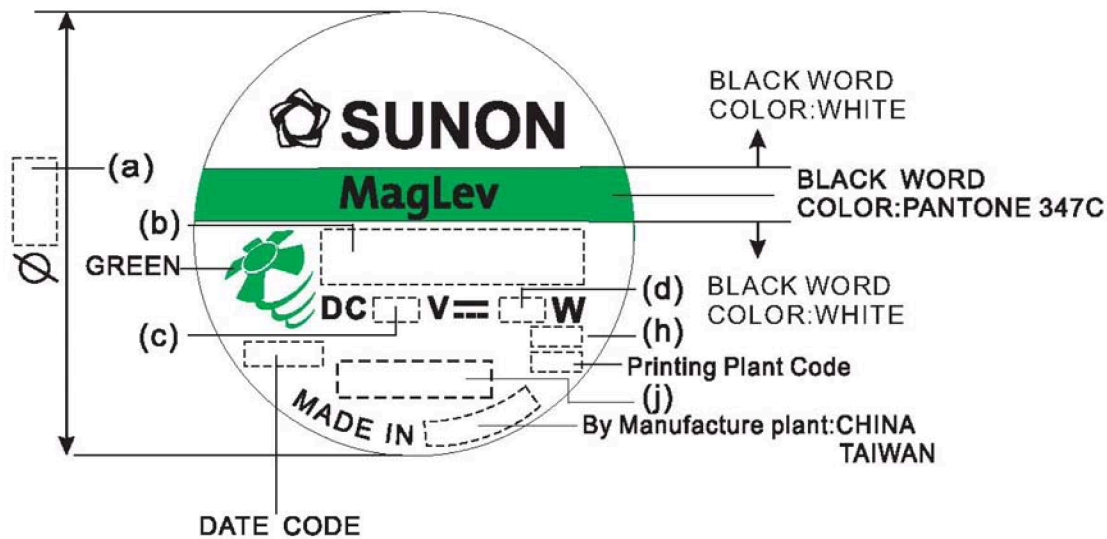

(a)Dimension	(b)Model Name	(c)Voltage	(d)Power Consumption	(h)Protection
24	MF75090V1-C330-S9A	5	2.25	EP

(j)Safety
CE/TUV/UL+CUR

1.English font type: Swis721 Series & Switzerland Narrow, Chinese font type: 超研澤中明簡體.

2.Safety(CE/TUV/UL+CUR)





Model Nos.	Source Of Supply	Section
USR, CNR - Models MF60120V1-C69(Y), MF60120V1-C411(Y), MF75070V1-C25(Y), VF40281BX(Y), VF40281B1(Y), MF80201V1-C00(Y), KD1204PFB2 11.(2).B4938(Y), PF97331BX-C0(Y), HA40101V4-Q0(Y), GF80321B(X)(Y), GF80251B(X)(Y), GF92251B(X)(Y), GE80252B(X)(Y), GE92252B(X)(Y), GE80254B(X)(Y), GE92254B(X)(Y), MF50151VX-C0(Y) and EE92251S4-Q(Y) series, where (X) may be 1, 2 or 3; (Y) stands for 30 variables, each variable may be A through Z, 0 through 9, "-", "(", ")", ".", "/" or blank.	DC	258
USR, CNR - Models MF50150V3-C(Y), MF60070V1-C37(Y), MF75090V1-C33(Y), MF75090V1-C37(Y), MG60090V1-C20(Y), EG75070S1-C0(Y), EG75070S1-C(Y), EF45101B1-C(Y), EF55151B1-Q(Y), HA80251V4-Q(Y), PF60251BX-Q(Y), PF40561BX-Q(Y), PF92251V1-1(Y), PF92251V2-1(Y), PF92251V3-1(Y) and PEC0322B4-C(Y) series, where (Y) stands for 30 variables, each variable may be A through Z, 0 through 9, "-", "(", ")", ".", "/" or blank.	DC	259

機密文件 禁止拷貝
Confidentiality Copy Forbidden

Zertifikat Certificate



Zertifikat Nr. Certificate No. R 50275749
Blatt Page 0012

Ihr Zeichen Client Reference	Unser Zeichen Our Reference	Ausstellungsdatum Date of Issue	(day/month/year)
TUV140526/114022754	ZTW1-JAL- 10045484 006	12.06.2014	

Genehmigungsinhaber License Holder
Sunonwealth Electric Machine Industry Co., Ltd.
No. 30, Ln. 296, Xinya Rd.
Qianzhen Dist. Kaohsiung 80673
Taiwan, R.O.C.

Fertigungsstätte Manufacturing Plant
Sunon Electronics (Kunshan) Co., Ltd.
168 Nanban Road, Kunshan
Jangsu 215301
P.R. China

Prüfzeichen Test Mark



Geprüft nach Tested acc. to
EN 60950-1:2006+A11+A1+A12

Zertifiziertes Produkt (Geräteidentifikation)
Certified Product (Product Identification)

Lizenzentgelte - Einheit
License Fee - Unit

Ventilator (DC Fan)

wie Blatt (as page)	01, Ergänzung (Addition)	
Bezeichnung (Type Designation)	: MF60070V1-C37Z, MF75090V1-C33Z (SUNON)	2
	MF75090V1-C37Z, MG60090V1-C20Z (SUNON)	2
	EG75070S1-C0Z, EG75070S1-CZ (SUNON)	2
	MF50150V3-CZ, EF45101B1-CZ (SUNON)	2
	EF55151B1-QZ, PF60251BX-QZ (SUNON)	2
	HA80251V4-QZ, PF40561BX-QZ (SUNON)	2
	EF80251S1-DZ, PF92251V1-1Z (SUNON)	2
	PF92251V2-1Z, PF92251V3-1Z (SUNON)	2
	PMD1204PUB1-A (2).B2768-5Z (SUNON)	1
	PEC0322B4-CZ (SUNON)	1

Z steht für 30 Kennzeichen. Jedes Kennzeichen entspricht einem der folgenden Zeichen. (Z stands for 30 characters. Each character stands for one of the following signs):
0-9, A-Z, (,), ., /, - oder (or) freibleibend (blank)
Nur zum Zwecke der Vermarktung (for marketing purpose only).
Nennspannung/Nennstrom/Nennleistung : siehe Anlage
(Rated Voltage/Rated Current/Rated Power) (see appendix)

ANLAGE (Appendix): 1.5

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde und es bestätigt die Konformität des Produktes mit den oben genannten Standards und Prüfgrundlagen. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich betrachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht.
This certificate is based on our Testing and Certification Regulation and states the conformity of the product with the standards and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subject to surveillance.

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
Tel.: (+49/221)8 06 - 13 71 e-mail: cert-validity@de.tuv.com
Fax: (+49/221)8 06 - 39 35 http://www.tuv.com/safety



Dipl.-Ing. R. Stöckel
機密文件 禁止拷貝
Confidentiality Copy Forbidden

Zertifikat Certificate



Zertifikat Nr. Certificate No. R 50275749
Blatt Page 0013

Ihr Zeichen Client Reference TUV140526/114022754
Unser Zeichen Our Reference ZTW1-JAL- 10045484 006
Ausstellungsdatum Date of Issue 12.06.2014 (day/month/year)

Genehmigungsinhaber License Holder
Sunonwealth Electric Machine Industry Co., Ltd.
No. 30, Ln. 296, Xinya Rd.
Qianzhen Dist. Kaohsiung 80673
Taiwan, R.O.C.

Fertigungsstätte Manufacturing Plant
Sunon Electronics (Kunshan) Co., Ltd.
168 Nanban Road, Kunshan
Jangsu 215301
P.R. China

Prüfzeichen Test Mark



Geprüft nach Tested acc. to
EN 60950-1:2006+A11+A1+A12

Zertifiziertes Produkt (Geräteidentifikation)
Certified Product (Product Identification)

Lizenzentgelte - Einheit
License Fee - Unit

Ventilator (DC Fan)

wie Blatt (as page) 01, Ergänzung (Addition)

Bezeichnung : EF70150SX-C01Z (SUNON) 1
(Type Designation)

Z steht für 30 Kennzeichen. Jedes Kennzeichen entspricht einem der folgenden Zeichen. (Z stands for 30 characters. Each character stands for one of the following signs):
0-9, A-Z, (,), ., /, - oder (or) freibleibend (blank)
Nur zum Zwecke der Vermarktung (for marketing purpose only). 1

Nennspannung : DC 5V
(Rated Voltage)
Nennstrom : 0.90A
(Rated Current)
Nennleistung : 4.50W
(Rated Power)

2

ANLAGE (Appendix): 1.1

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde und es bestätigt die Konformität des Produktes mit den oben genannten Standards und Prüfgrundlagen. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich betrachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht.
This certificate is based on our Testing and Certification Regulation and states the conformity of the product with the standards and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subject to surveillance.

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
Tel.: (+49/221)8 06 - 13 71 e-mail: cert-validity@de.tuv.com
Fax: (+49/221)8 06 - 39 35 http://www.tuv.com/safety


Zertifizierungsstelle




Dipl.-Ing. F. Stöckel

FAN 3rd WIRE SIGNAL

● F Type (Frequency Generator)

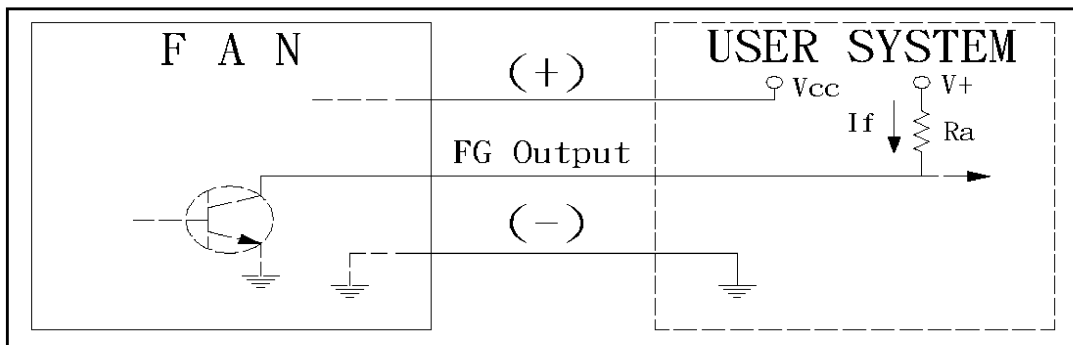


$*R_a \geq V^+ / I_f(\text{max})$


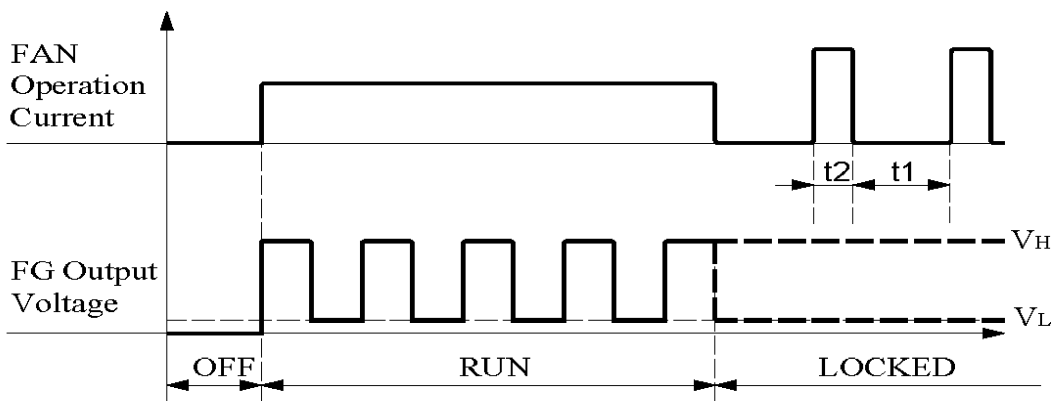


★Electrical Characteristics : (at $T_a = 25^\circ\text{C}$) $V_{cc} = 5V \pm 10\%$

Parameter	Ratings			Unit
	min	typ.	max	
FG Supply Voltage(V+)	2.5	V+	V _{cc}	Voltage
FG Output Current (If)	--	--	3	mA
FG Output (VL)	--	--	0.4	Voltage
FG Output (VH)	--	V+	--	Voltage

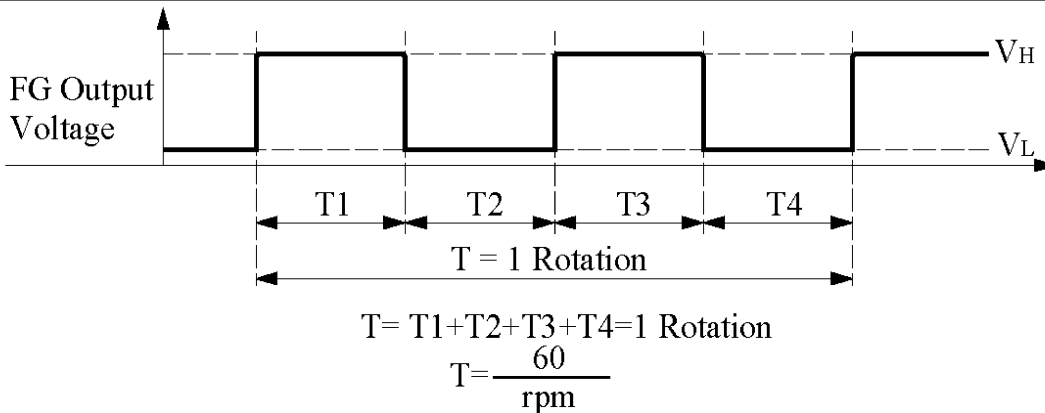

PWM INPUT SIGNAL

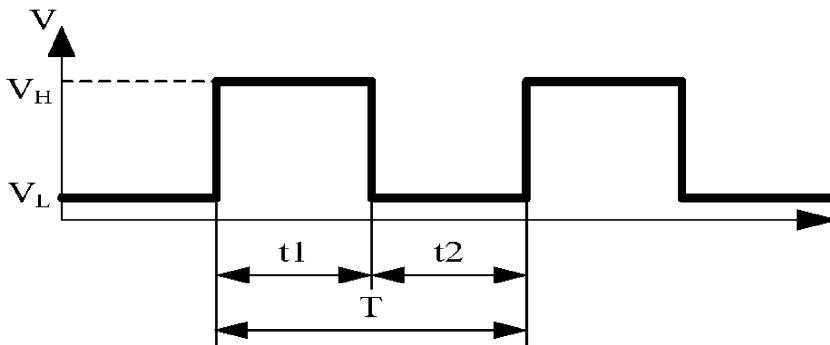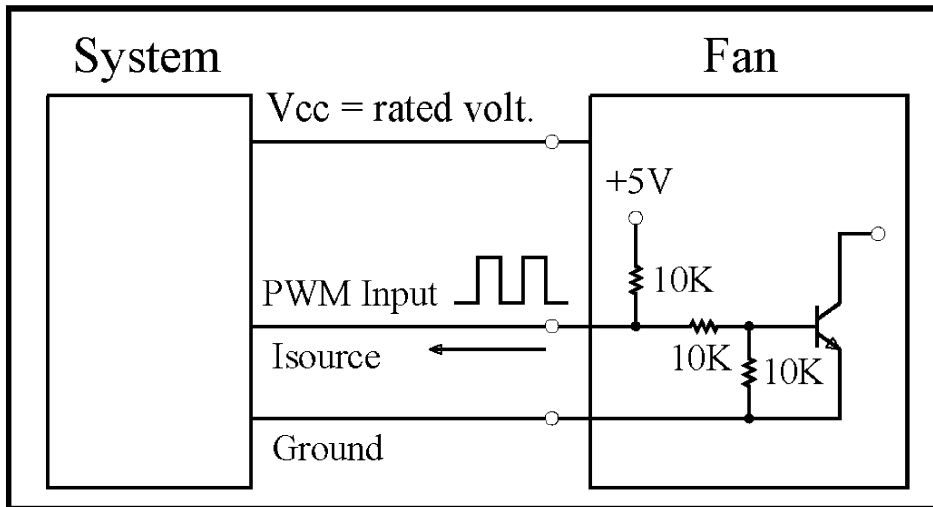

1. Period :
$$T = \frac{1}{f_{PWM}} = t1 + t2(\text{sec})$$

2. Duty Cycle (D.C.) :
$$\frac{t1}{t1 + t2} * 100 = \frac{t1}{T} * 100(\%)$$

3. PWM Duty Cycle VS Speed (at $T_a = 25^\circ\text{C}$, $V_{cc} = \text{Rated Volt.}$, $f_{pwm} = 25\text{KHz}$)

PWM Duty Cycle (%)	FAN Speed (R.P.M.) (REF.)
30%	1200±30%
100%	2900±7%

★Electrical Characteristics : (at $T_a = 25^\circ\text{C}$, $V_{cc} = \text{Rated Volt.}$)

Parameter	Min	Typical	Max	Unit
f pwm	-	25K	-	Hz
V_H	2.3	-	5.5	V
V_L	0	-	0.8	V
Isource	0	-	5	mA
D.C.	30	-	100	%

* The speed is default to be maximum if PWM input pin is unconnected.

* Min. start up duty cycle is 30%. Please don't apply 1 ~ 29% duty cycle to prevent unstable fan speed.


DUTY CYCLE & SPEED CURVE

MODEL:MF75090V1-C330-S9A


■ Duty Cycle v.s. Speed curve @ Vcc= rated volt.

PWM控制頻率: 25K Hz

Duty Cycle	30%	40%	50%	60%	70%	80%	90%	100%
Typ.	1200	1500	1800	2000	2200	2400	2600	2900

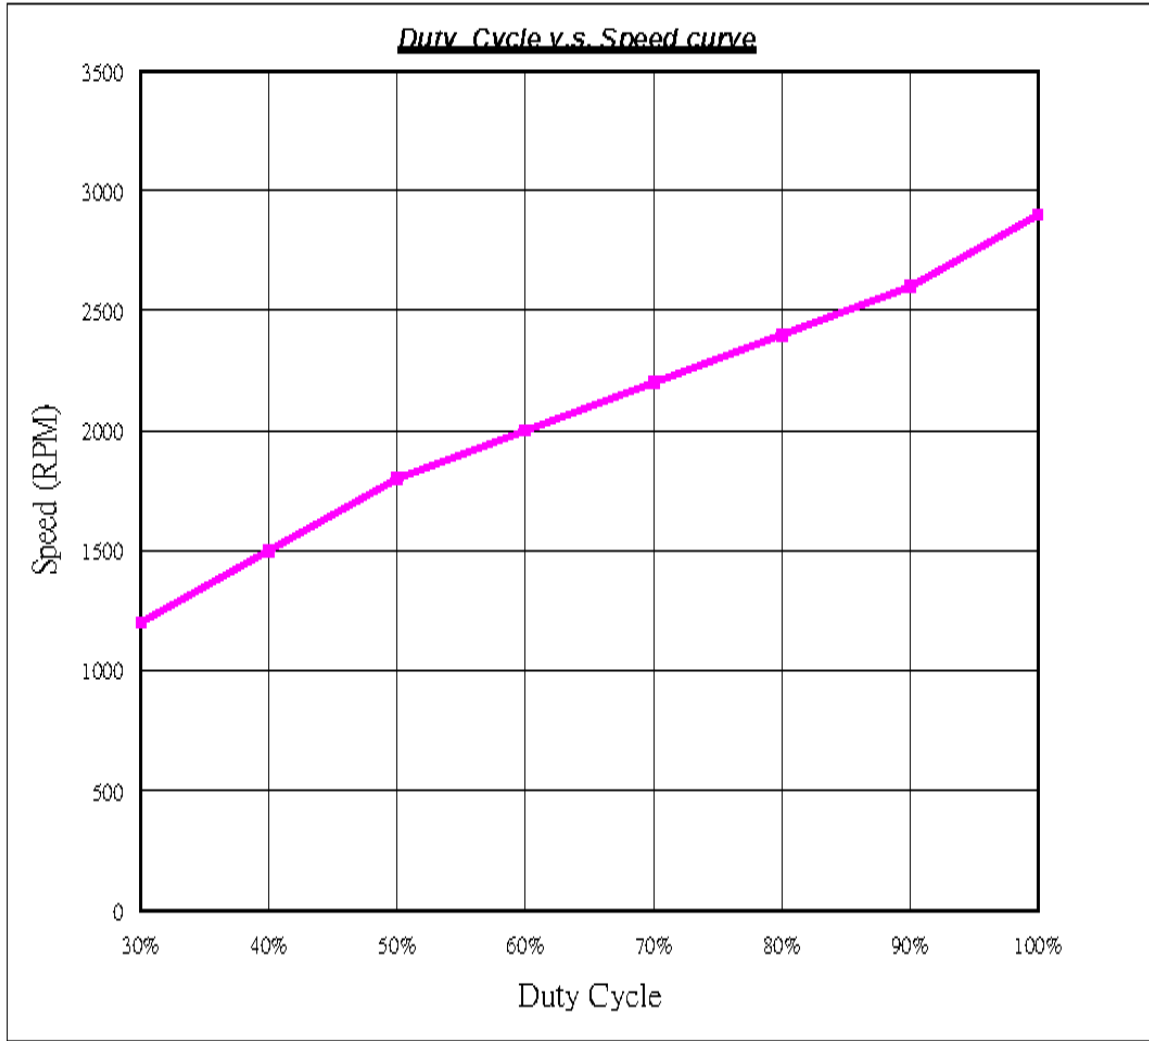

PACKAGE

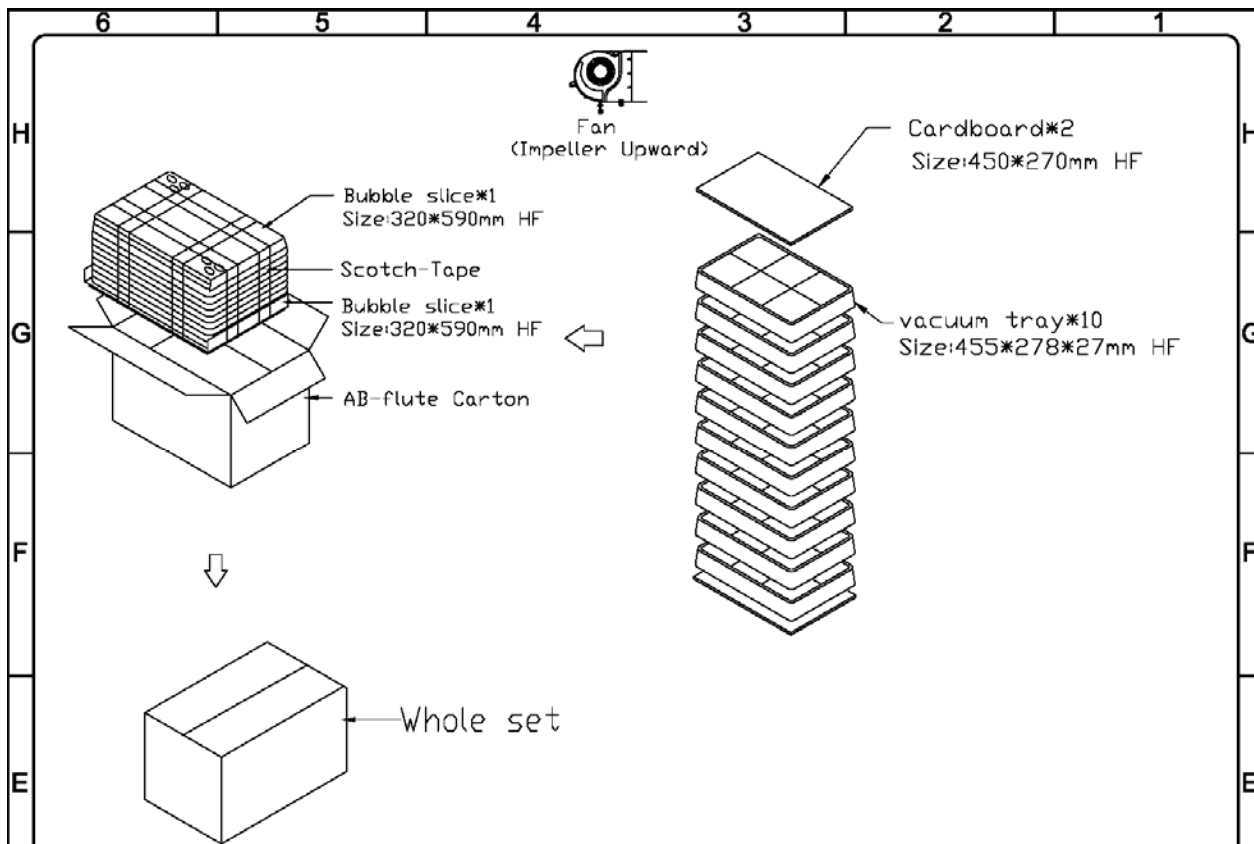

The raw material or component of our products shall not contain hazardous substances which were stated in Sunon's Index of Inspection technology and criteria for hazardous substances in fan

<table border="1"> <tr> <th>CTN SIZE</th> <th>QTY/CTN</th> <th>(Cu/ft) Measurement</th> </tr> <tr> <td>470*290*263mm HF</td> <td>80</td> <td>1.27</td> </tr> </table>			CTN SIZE	QTY/CTN	(Cu/ft) Measurement	470*290*263mm HF	80	1.27	Model: MF75090V1-C330-S9A ★: 此標記為檢驗尺寸
			CTN SIZE	QTY/CTN	(Cu/ft) Measurement				
470*290*263mm HF	80	1.27							
外箱瓦楞紙 / 真空盤PET 材 質 MATERIAL		適 用 範 圍 SCOPE							



III. OTHER SPECIFIED TESTING

The following is a general description of certain tests that are performed on representative SUNON fans. Nothing in this document is intended to suggest that these tests are performed on every model of SUNON fan. Moreover, the descriptions that follow each test are meant only to provide a general explanation of each test. If you would like a more detailed explanation as to any test identified in this Section, SUNON can provide such an explanation upon request.

1. DROP PROOF TEST

Fans are packaged in a standard size shipping box and are dropped to the ground from certain heights and angles depending on the weight of the particular box.

2. HUMIDITY PROOF TEST

The fan is operated for 96 continuous hours in an environment with humidity of 90% to 95% RH at $60^{\circ}\text{C} \pm 2^{\circ}\text{C}$.

3. VIBRATION PROOF TEST

Vibration with an amplitude 2mm and a frequency of 5-55-5hz is applied in all 3 directions (X,Y,Z), in cycles of 1 hour each, for a total vibration time of 3hours.

4. THERMAL CYCLING TEST

The fan is operated in a testing chamber for 50 cycles. In each cycle, the temperature is gradually increased from -10°C to 70°C for 90 minutes, and subsequently operated at 70°C for 120 minutes. The temperature is then gradually decreased from 70°C to -10°C for 90 minutes, and subsequently operated at -10°C for 120 minutes.

5. SHOCK PROOF TEST

100G of force is applied in the 3 directions (X,Y, and Z) for 2 milliseconds each.

6. LIFE EXPECTANCY


The "Life Expectancy" of SUNON fans is determined in SUNON's reliability test laboratory by using temperature chambers. The "Life Expectancy" of this fan has not been evaluated for use in combination with any end application. Therefore, the Life Expectancy Test Reports (L10 and MTTF Report) that relate to this fan are only for reference.

IV. CHARACTERISTIC DEFINITION

The following is a general description of certain tests that are performed on representative SUNON fans in order to determine the specifications of the fan. Nothing in this document is intended to suggest that these tests are performed on every model of SUNON fan. Moreover, the descriptions that follow each test are meant only to provide a general explanation of each test. If you would like a more detailed explanation as to any test identified in this Section, SUNON can provide such an explanation upon request.

1. ACOUSTICAL NOISE

Measured in a semi-anechoic chamber with background noise level below 15dB(A).

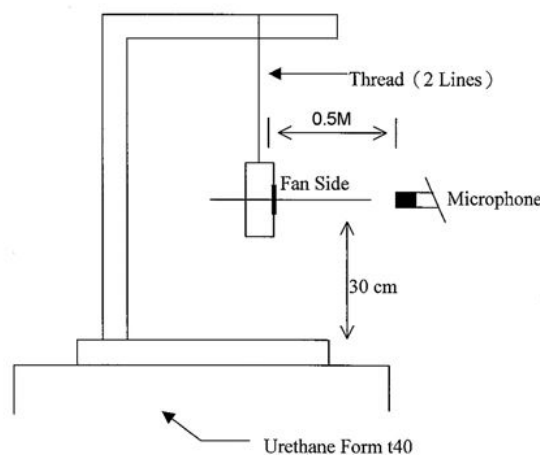

0.5 METER FROM MICROPHONE TO FAN INTAKE

The fan is running in free air under shaft horizontal condition with the microphone at distance of 0.5 meter from the fan intake.

2. INPUT POWER

Measured after continuous 10 minute operation at rated voltage in clean air (STATIC PRESSURE=0), and at ambient temperature of 25 degrees C under shaft horizontal condition.

3. RATED CURRENT

Measured after continuous 10 minute operation at rated voltage in clean air (STATIC PRESSURE=0), and at ambient temperature of 25 degrees C under shaft horizontal condition.



4. RATED SPEED

Measured after continuous 10 minute operation at rated voltage in clean air (STATIC PRESSURE=0), and at ambient temperature of 25 degrees C under shaft horizontal condition.

5. STARTING VOLTAGE

Measured the voltage which enables to start the fan in the clean air (static pressure = 0) by switching on at the voltage under shaft horizontal condition. It is not at continuously increasing voltage adjustment.

6. LOCKED ROTOR CURRENT

Measured immediately after the fan blade is locked.

7. AIR FLOW AND STATIC PRESSURE

The performance specification of air flow and static pressure shown in this specification for approval is measured using the exhaust method. A double chamber is used in accordance with AMCA 210 standard or DIN 24163 specification . The values are recorded when the fan speed has stabilized at rated voltage.

8. INSULATION RESISTANCE

1. PLASTIC HOUSING:

- (1) Measured between internal stator and lead wire(+).
- (2) Measured between housing and lead wire(+).

2. ALUMINIUM HOUSING:

Measured between internal stator and lead wire(+).

9. DIELECTRIC STRENGTH

Measure between housing and lead wire(+).



V.NOTE

I .SAFETY

1. DO NOT use or operate this fan in excess of the limitations set forth in this specification. SUNON is not responsible for the non-performance of this fan and/or any damages resulting from its use, if it is not used or operated in accordance with the specifications.
2. SUNON recommends adding a protection circuit to the product or application in which this fan is installed, such as a thermo-fuse, or current-fuse or thermo-protector. The failure to use such a device may result in smoke, fire, electric shock by insulation degradation in cases of motor lead short circuit, overload, or over voltage, and/or other failure.
3. SUNON recommends installing a protection device to the product or application in which this fan is installed if there is a possibility of reverse-connection between VDC (+) and GND (-). The failure to install such a device may result in smoke, fire, and/or destruction, although these conditions may not manifest immediately.
4. This fan must be installed and used in compliance with all applicable safety standards and regulations.
5. Use proper care when handling and/or installing this fan. Improper handling or installation of this fan may cause damage that could result in unsafe conditions.
6. Use proper care during installation and/or wiring. Failure to use proper care may cause damage to certain components of the fan including, but not limited to, the coil and lead wires, which could result in smoke and/or fire.
7. DO NOT use power or ground PWM to control the fan speed. If the fan speed needs to be adjusted, please contact SUNON to customize the product design for your application.
8. For critical or extreme environments, including non stop operation, please contact SUNON and we will gladly provide assistance with your product selection to ensure an appropriate cooling product for your application.



II. SPECIFICATION MODIFICATION

1. SUNON offers engineering assistance on fan installation and cooling system design.
2. All changes, modifications and/or revisions to the specifications, if any, are incorporated in the attached specifications.
3. No changes, modifications and/or revisions to these specifications are effective absent agreement, by both SUNON and the customer, in writing.
4. This fan will be shipped in accordance with the attached specification unless SUNON and the customer have agreed otherwise, in writing, as specified in Paragraph 3, above.

III. OTHER

1. When building your device, please examine thoroughly any variation of EMC, temperature rise, life data, quality, etc. of this product by shock/drop/vibration testing, etc. If there are any problems or accidents in connection with this product, it should be mutually discussed and examined.
2. Use proper care when handling this fan. Components such as fan holders or bearings may be damaged, if touched with fingers or other objects. Additionally, static electricity (ESD) may damage the internal circuits of the fan.
3. DO NOT operate this fan in proximity to hazardous materials such as organic silicon, cyanogens, formalin, phenol, or corrosive gas environments including, but not limited to, H₂S, SO₂, NO₂, or Cl₂.
4. SUNON recommends that you protect this fan from exposure to outside elements such as dust, condensation, humidity or insects. Exposure of this fan to outside elements such as dust, condensation, humidity or insects may affect its performance and may cause safety hazards. SUNON does not warrant against damage to the product caused by outside elements.
5. This fan must be installed properly and securely. Improper mounting may cause harsh resonance, vibration, and noise.



6. Fan guards may prevent injury during handling or installation of the fan and are available for sale with this fan.
7. Unless otherwise noted, all testing of this fan is conducted at 25°C ambient temperature and sixty-five percent (65%) relative humidity.
8. DO NOT store this fan in an environment with high humidity. This fan must be stored in accordance with the attached specifications regarding storage temperature. If this fan is stored for more than 6 months, SUNON recommends functional testing before using.
9. SUNON reserves the right to use components from multiple sources at its discretion. The use of components from other sources will not affect the specifications as described herein.
10. The “Life Expectancy” of this fan has not been evaluated for use in combination with any end application. Therefore, the Life Expectancy Test Reports (L10 and MTTF Report) that relate to this fan are only for reference.

VI. WARRANTY

This fan is warranted against all defects which are proved to be fault in our workmanship and material for one year from the date of our delivery. The sole responsibility under the warranty shall be limited to the repair of the fan or the replacement thereof, at SUNON’s sole discretion. SUNON will not be responsible for the failures of its fans due to improper handling, misuse or the failure to follow specifications or instructions for use. In the event of warranty claim, the customer shall immediately notify SUNON for verification. SUNON will not be responsible for any consequential damage to the customer’s equipment as a result of any fans proven to be defective.

Declaration of Restricted Materials

Control declaration of environment- related substances/ materials

1. In accordance with the Restriction of Hazardous Substances (RoHS) Directive 2011/65/EU and specific market requirements, SUNON Halogen-Free Product have complied with law and discipline not to employ the forbidden substances, and restrict the allowable concentration of some limited substances deliberately in our components.

No	Substance	Criteria	
1	CFCs & HCFCs (ozone depleting substances)	Forbidden	
2	Chlorinated Organic Solvent	Forbidden	
3	Lead and its compounds	Plastic (Frame, Impeller, wire harness, etc.)	<100ppm
		Solder	<1000ppm
		Steel alloy	<3500ppm
		Aluminium alloy	<4000ppm
		Copper alloy	<4wt%
4	Cadmium and its compounds	Solder	<20ppm
		Parts composed of metals containing zinc (e.g. brass, zinc for die casting)	<100ppm
		Plastic	<5ppm
5	PBBs and PBDEs	Forbidden	
6	PCB and PCT	Forbidden	
7	CP, Short-chain Chlorinated paraffins C10-13, Cl ≥48 wt%	Forbidden	
8	Mirex	Forbidden	
9	PCN	Forbidden	
10	Hexavalent Chromium compounds	<100ppm	
11	Mercury and its compounds	Forbidden	
12	Asbestos	Forbidden	
13	Organic Tin compounds	Forbidden	
14	Azo compounds	Forbidden	
15	TBBP-A in external case plastic parts of products (PCB is exempted)	<1000ppm	
16	Nickel in external case parts, which are likely to result in prolonged skin exposure	<1000ppm	
17	Hexabromocyclododecane (HBCDD)	<1000ppm	
18	Di-butyl Phthalate (DBP)	<1000ppm	
19	Benzyl butyl Phthalate (BBP)	<1000ppm	
20	Di-ethylhexyl Phthalate (DEHP)	<1000ppm	
21	Di-isobutyl Phthalate (DIBP)	<1000ppm	
22	Brominated/chlorinated flame retardants (other than PBBs or PBDEs), applicable item: frame, bobbin, impeller, lear wire, connector, mylar insulator.	Br<900ppm Cl<900ppm Br+Cl<1500ppm	
23	PAHs and its 16 compounds in unusual contact material	BaP < 20ppm Total <200ppm	
24	PCB and electroplating material, PFOS content complied with 2006/122/EC	PFOS ≤1000ppm; coating material PFOS ≤ 1μg/m ²	