SFR-5/8-0-SP ✔ ACTIVE

RAYCHEM

TE Internal #: 5660044001

Black, 1.75:1, Single Wall Tubing, Shrinks To .36 in [9.1 mm], Crosslinked Silicone Elastomer, .625 in [15.9 mm] Inner Diameter, Flame-Retardant

View on TE.com >

Heat Shrink Tubing > Single Wall SFR: Heat Shrink Tubing, 1.75:1 Shrink Ratio



Primary Product Color: **Black**

Wall Type: **Single Wall**

Expanded Inside Diameter (Min): **15.9 mm [.625 in]**

Recovered Inside Diameter (Max): **9.1 mm [.36 in]**

Shrink Ratio: **1.75:1**

All Single Wall SFR: Heat Shrink Tubing, 1.75:1 Shrink Ratio (13)

Features

Product Type Features

Wall Type	Single Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV

Body Features

Fluid Type	Aviation Fuel, Brake Fluid, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	1.75:1
Primary Product Material	Crosslinked Silicone Elastomer
Flexibility	Very Flexible

Dimensions

Recovered Wall Thickness (Nominal)	1.32 mm[.052 in]
Expanded Inside Diameter (Min)	15.9 mm[.625 in]
Recovered Inside Diameter (Max)	9.1 mm[.36 in]

Usage Conditions

Shrink Temperature (Min)	175 °C
Tubing Flammability Type	Flame-Retardant

Operating Temperature Range	-75 - 180 °C
Recovery Temperature	175 °C

Operation/Application

Mechanical Resistance	Fluids, Strain Relief

Product Availability

Applicable Region	Worldwide

Packaging Features

Packaging Method	Piece

Other

Meets Low Outgassing Requirements	No
Product Source	US

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.24%) **Article Safe Usage Statements:** Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought



TE Part # 1658621-1
10 NOVO MIL/CTR 15DP,LEAD FREE

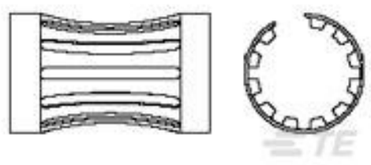

TE Part # 7-192043-2
LA4(.125)(.006) SIL



TE Part # 5660164003
SFR-3/16-0-SP



TE Part # YDTS26W13-08SAV001
PLUG ASSY



TE Part # 162927-000
55A1121-16-9/96-9CS2275



TE Part # 5053082106
RNF-100-3/16-WH-STK

TE Part # AFD54-24-31PN-6116
RECP ASSY



TE Part # ES21774001
RNF-100-3/16-BK-SP-CS34134



TE Part # 176246N002
S02-08-R-93CS816

Documents

Product Drawings

SFR-5/8-0-SP

English

Datasheets & Catalog Pages

1654025_Sec3_SFR

English

raychem-tubing-product-selection-guide

English

Product Specifications

Product Specification

English