179974-6 ✔ ACTIVE

Positive Lock | Positive Lock 250

TE Internal #: 179974-6

Quick Disconnects, Receptacle, 18 - 14 AWG Wire Size, .82 - 2.08 mm² Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, Brass, Positive Lock 250

View on TE.com >

Terminals & Splices > Quick Disconnects







Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 - 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable

Mechanical Attachment

Extraction Force	5.9 - 29.4 Newton
Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	21.2 mm[.834 in]
Compatible Insulation Diameter Range	2.21 - 3.4 mm[.087 - .134 in]
Wire Size	.82 - 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL

Packaging Features

Packaging Quantity	4500
Packaging Method	Strip/Reel

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

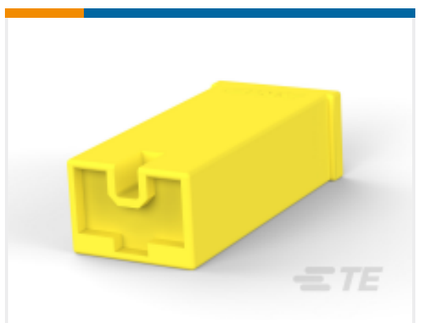

TE Part # 179970-4
PL EXII 250 REC HSG 1P NYLON YELLOW




TE Part # 179970-1
250 HSG. PL EX REC.



TE Part # 179970-9
PL EXII 250 REC HSG 1P NYLON BLACK




TE Part # 179970-2
PL EXII 250 REC HSG 1P NYLON RED

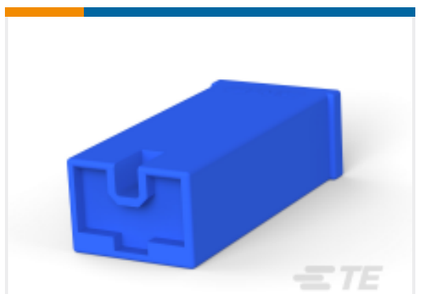

TE Part # 179970-6
PL EXII 250 REC HSG 1P NYLON BLUE



TE Part # 2150057-2
OCEAN_2.0_APPLICATOR-E-110F180F-REA

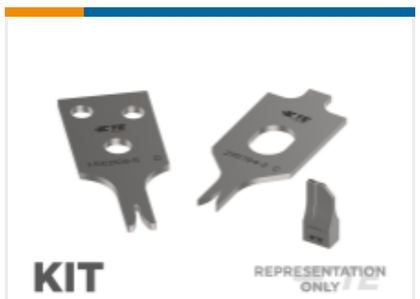

TE Part # 7-2150057-7
OCEAN_2.0_SPARE_PART_KIT-110F180F



TE Part # 7-2150057-2
OCEAN_2.0_APPLICATOR-E-110F180F

Also in the Series | Positive Lock 250



Automotive Terminals(1)




Crimp Terminal Housings(192)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)

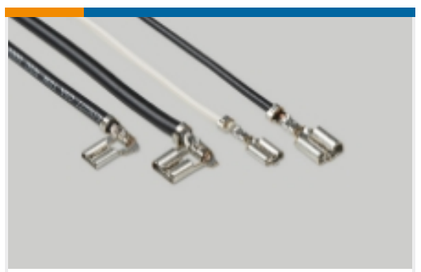

Quick Disconnects(186)

Customers Also Bought



TE Part # 177899-1
POWER DBL LOCK PLUG HSG 3P



TE Part # 1746973-1
GRACE INERTIA CONNECTOR 6.2 MM PITCH TAB



TE Part # 175057-2
250 PL EX FLAG REC. 18-12AWG PTBR




TE Part # 3-1971906-4
HEADER ASSY 8POS,KEYING-C,NEW GIC3.3




TE Part # 179973-1
250 PL EX REC. 22-18AWG PTBR



TE Part # 170213-2
250 FASTON,REC.,18-14 AWG,TPBR

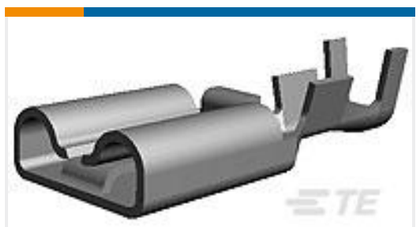

TE Part # 175020-1
250 PL EX REC. 22-18AWG PTBR



TE Part # 171370-5
CLUSTER BLOCK HSG PBT

TE Part # 2069905-1
GIC 2.5 W PLUG HSG 14P NATURAL



TE Part # 3-2174298-4
5mm POWER KEY 3P HDR ASSEMBLY

Documents

Product Drawings

250 PL EX REC. 18-14AWG PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_179974-6_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_179974-6_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_179974-6_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditionsof use.

Product Specifications

Application Specification

English

Instruction Sheets

POSITIVE LOCK EX-II CONNECTORS, INSTRUCTION SHEET

Japanese

Instruction Sheet (non U.S.)

English