

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with push-in connections and male D-SUB miniature pin strip, for mounting on NS 35 rails, 25-pos.

Commercial data

Item number	2903781
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C423
Product key	CK2122
Catalog page	Page 555 (C-5-2019)
GTIN	4046356796569
Weight per piece (including packing)	152.4 g
Weight per piece (excluding packing)	150 g
Customs tariff number	85366990
Country of origin	US

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

Technical data

Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	25
No. of channels	25

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Nominal voltage U_N	25 V AC
	60 V DC
Max. current carrying capacity per branch	2 A
Rated surge voltage	1.2 kV

Connection data

Field level

Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Controller level

Connection method	D-SUB pin strip
Number of connections	1
Number of positions	25

Signaling

Status display	No
Status display present	No

Dimensions

Item dimensions

Width	57.1 mm
Height	75.8 mm
Depth	63 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

Housing insulation material	Polyamide 6.6 green
-----------------------------	---------------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

VIP-3/PT/D25SUB/M - Interface module


2903781

<https://www.phoenixcontact.com/us/products/2903781>



Drawings

Circuit diagram

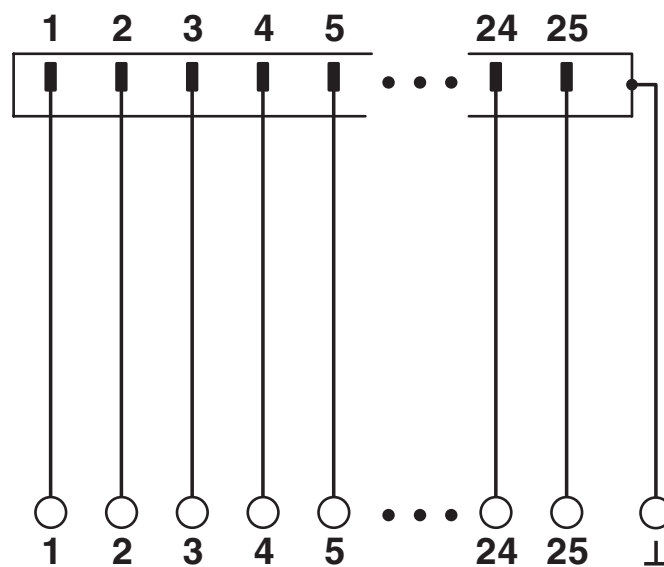

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2903781>

 CSA Approval ID: 2122203				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	105 V	2 A	26 - 14	-

 cUL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	2 A	26 - 14	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	125 V	2 A	26 - 14	-

 EAC Approval ID: EAC-Zulassung				
--	--	--	--	--

 CSAus Approval ID: 2122203				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	105 V	2 A	28 - 14	-

cULus Recognized				
-------------------------	--	--	--	--

cCSAus				
---------------	--	--	--	--

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 9.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b71641b9-cb39-4a0a-8898-bc3675093e27

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

Accessories

CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/us/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

CABLE D-SUB-B-B-S/.../.../... - Cable

2302421

<https://www.phoenixcontact.com/us/products/2302421>



Shielded round cable, assembled with two D-SUB female strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

VIP-3/PT/D25SUB/M - Interface module

2903781


<https://www.phoenixcontact.com/us/products/2903781>



UC-TM 4 - Marker for terminal blocks

0818111

<https://www.phoenixcontact.com/us/products/0818111>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

VIP-3/PT/D25SUB/M - Interface module

2903781

<https://www.phoenixcontact.com/us/products/2903781>



UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

ZB 5,08:UNBEDRUCKT - Zack marker strip

0809793

<https://www.phoenixcontact.com/us/products/0809793>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

VIP-3/PT/D25SUB/M - Interface module

2903781

<https://www.phoenixcontact.com/us/products/2903781>



ZB 22:UNBEDRUCKT - Zack marker strip

0811862

<https://www.phoenixcontact.com/us/products/0811862>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 22 mm, lettering field size: 10.5 x 21.8 mm, Number of individual labels: 4

CABLE-D25SUB/B/S/ 50/KONFEK/S - Cable

2302120

<https://www.phoenixcontact.com/us/products/2302120>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 0.5 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/S/100/KONFEK/S - Cable

2302133

<https://www.phoenixcontact.com/us/products/2302133>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 1 m

CABLE-D25SUB/B/S/150/KONFEK/S - Cable

2302146

<https://www.phoenixcontact.com/us/products/2302146>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 1.5 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/S/200/KONFEK/S - Cable

2302159

<https://www.phoenixcontact.com/us/products/2302159>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 2 m

CABLE-D25SUB/B/S/300/KONFEK/S - Cable

2302162

<https://www.phoenixcontact.com/us/products/2302162>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 3 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/S/400/KONFEK/S - Cable

2302175

<https://www.phoenixcontact.com/us/products/2302175>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 4 m

CABLE-D25SUB/B/S/600/KONFEK/S - Cable

2302188

<https://www.phoenixcontact.com/us/products/2302188>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 6 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/S/HF/S/ 1,0M - Cable

1066665

<https://www.phoenixcontact.com/us/products/1066665>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 1 m

CABLE-D25SUB/B/S/HF/S/ 2,0M - Cable

1066666

<https://www.phoenixcontact.com/us/products/1066666>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 2 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/S/HF/S/ 3,0M - Cable

1066667

<https://www.phoenixcontact.com/us/products/1066667>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 3 m

CABLE-D25SUB-B-S-HF-S/... - Cable

1075559

<https://www.phoenixcontact.com/us/products/1075559>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: variable

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/B/100/KONFEK/S - Cable

2305473

<https://www.phoenixcontact.com/us/products/2305473>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: 1 m

CABLE-D25SUB/B/B/200/KONFEK/S - Cable

2305486

<https://www.phoenixcontact.com/us/products/2305486>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: 2 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/B/300/KONFEK/S - Cable

2305499

<https://www.phoenixcontact.com/us/products/2305499>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: 3 m

CABLE-D25SUB/B/B/HF/S/ 1,0M - Cable

1066657

<https://www.phoenixcontact.com/us/products/1066657>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: 1 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D25SUB/B/B/HF/S/ 2,0M - Cable

1066660

<https://www.phoenixcontact.com/us/products/1066660>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: 2 m

CABLE-D25SUB/B/B/HF/S/ 3,0M - Cable

1066664

<https://www.phoenixcontact.com/us/products/1066664>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: 3 m

VIP-3/PT/D25SUB/M - Interface module

2903781

<https://www.phoenixcontact.com/us/products/2903781>



CABLE-D25SUB-B-B-HF-S/... - Cable

1075560

<https://www.phoenixcontact.com/us/products/1075560>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB socket strip (1x 25-position); cable length: variable

CABLE-D-25SUB/F/OE/0,25/S/0,5M - Cable

2926153

<https://www.phoenixcontact.com/us/products/2926153>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 0.5 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D-25SUB/F/OE/0,25/S/1,0M - Cable

2926166

<https://www.phoenixcontact.com/us/products/2926166>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 1 m

CABLE-D-25SUB/F/OE/0,25/S/1,5M - Cable

2926179

<https://www.phoenixcontact.com/us/products/2926179>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 1.5 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D-25SUB/F/OE/0,25/S/2,0M - Cable

2926182

<https://www.phoenixcontact.com/us/products/2926182>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 2 m

CABLE-D-25SUB/F/OE/0,25/S/3,0M - Cable

2926195

<https://www.phoenixcontact.com/us/products/2926195>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 3 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D-25SUB/F/OE/0,25/S/4,0M - Cable

2926205

<https://www.phoenixcontact.com/us/products/2926205>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 4 m

CABLE-D-25SUB/F/OE/0,25/S/6,0M - Cable

2926218

<https://www.phoenixcontact.com/us/products/2926218>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 6 m

VIP-3/PT/D25SUB/M - Interface module



2903781

<https://www.phoenixcontact.com/us/products/2903781>

CABLE-D-25SUB/F/OE/0,25/S/10M - Cable

2906214

<https://www.phoenixcontact.com/us/products/2906214>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 10 m

CABLE-D-25SUB/F/OE/0,25/S/15M - Cable

2906215

<https://www.phoenixcontact.com/us/products/2906215>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 15 m

VIP-3/PT/D25SUB/M - Interface module

2903781

<https://www.phoenixcontact.com/us/products/2903781>



CABLE-D-25SUB/F/OE/0,25/S/20M - Cable

2906216

<https://www.phoenixcontact.com/us/products/2906216>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: 20 m

CABLE-D-25SUB-F-OE-0,25-S/... - Cable

2900906

<https://www.phoenixcontact.com/us/products/2900906>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 25-position); cable length: variable

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com